

www.projectcollection.co.uk

5
YEAR
warranty

2024



project

collection

ceiling / recessed / recessed plaster / track & spot / led strip / wall reading lights / wall / wall plaster / table & floor / shades / outdoor /

CI/SfB (63)X

2024

project collection


The 2024 Project Collection is a toolkit solution for lighting specifiers. Tailored to align with project requirements, it optimises lighting outcomes with architectural design, empowering informed decisions, and maximising efficiency. Streamline your specifications and achieve outstanding project outcomes with our collection.

useful information

GU10 items

All GU10 products are designed to be compatible with a standard GU10 lamp length of 53mm. The minimum recess depth dimensions specified for our products are based on this standard lamp length of 53mm, providing a clear guideline for installation. Where items are designed for use with a longer GU10 lamp length this is indicated in the key features on the product page.

GU10 lamps are not included.



Dimming

All dimmable products are compatible with mains leading and/or trailing edge dimming. We test all our dimmable products for compatibility with Varilight Pro-dimmer modules. We cannot guarantee the compatibility of other leading / trailing edge dimmers.



Products with this icon are limited stock items.

Colour Rendering Index (CRI)

All products have a minimum CRI >80. CRI>90 products are indicated on the page.

Photometric files

Where possible, we provide LDT/IES data for our products to facilitate the generation of lighting plans to ensure seamless integration into your projects. These are available to download from our product pages at...

www.projectcollection.co.uk

We can further assist in the generation of effective lighting designs for your projects. Whether you need guidance on product selection, positioning, or other aspects of lighting planning.

Power Factor

Every product in our range delivers a minimum power factor of 0.9, unless otherwise specified.

Warranty

All products are manufactured and inspected in order to meet the technical and quality standards demanded by the market. These come with a standard 5 year warranty out of the box.

We understand that coastal environments can subject products to unique challenges, such as saltwater exposure and extreme weather conditions, our 5 year warranty includes all outdoor products with this icon, when used in locations up to 1km from the coast.



Scan here for further help & advice.



contents
ceiling



13 New 14-15 New 16-17 New 18-19 New

laser pendant vistina round vistina long lino 2

20-21 New 22-23 24-25

orbit 120cm compass 2m

26 27

ara 60cm / 100cm / 150cm eternity 78cm eternity 55cm

28 29 30-31 New 32 New

clip vulcan 2ft / 4ft verve  ripple 40cm

33 34-35 New 36 37

peri 30cm  orcus / saturn

To view a product, simply click on the product image...

38-39 New 40-41 42 43

swivel / andromeda honos lyra artemis / apollo

recessed 46-47 New 48-49 New 50-51 New

moon recessed polo mini

52-53 54-55

wall washers grid WW / WB / BB

56-57 58 59 60

grid FR  slim trim adjustable FR  slim trim adjustable slim trim IP65 FR  

61 62 63 New 64-65

slim trim IP65  glacier IP65  sophie IP65  slim trimless FR 

contents
recessed

66-67



70-71

72-73



74-76

sablons

plaster downlights

solid plaster wall lights

metal trimless wall lights

77-79



80-81



recessed IP wall lights

marker lights



84-91



92



track
& spot

track, track heads and accessories

laser spot

93

94-97



98-99

selene



moon

jupiter

led strip

102-105

106-109

led strip / IP65

aluminium profile and drivers

contents
wall

112-113



114



115



116



blackfrairs

perla

laser reader

marlow



117



118

119



120-121

dalston

ice

marylebone

victoria LED / recessed



122-123

124-125

126

127

mini projector

sloane

shoreditch

128-129

130-131

132-133

134-137

vavin

london bridge

halkin

pimlico (2) / reader

138-139

140

144

145

victoria / reader

fenchurch

concorde

europe

contents
wall plaster

146-147 148 149 150

mirabeau / monceau avron cadet cambronne

151 **mirror**

opera / odeon 154-155 156-157 158-159

**table
& floor**

libra 2 olympia kensington
shades 162-164 165

shades 3-light

contents
outdoor

168-169 170-171 172 173

euston / hood plot light piccadilly paddington

174-175 **New** 176 **New** 177 178

farringdon / plus beaumont sanderson grosvenor
179 180-181 **New** 182-184 **New**

grosvenor II connaught / plus lanesborough / savoy
185 186-187 189 **New** 190-191

berkeley strand / mayfair trafalgar kobe / kyoto
192-193 194-195 196-197

chiba duo / tokyo yokhama sapporo / suzuka



ceiling



New

See pages below for the rest of the laser family:

- laser GU10 track 87
- laser spot 92
- laser reader 115

PE-LAS6-B
PE-LAS6-W

laser pendant New

PE-LAS6-B ■

PE-LAS6-W □

CLASS 2

DIMMABLE

ANTI-GLARE

Key Features

Sand black / Sand white

Aluminium / Frosted diffuser

GU10 max. 10W LED only

Min. drop: 200mm

90° pivot, 350° rotation

RRP - £220.00

New



PE-VISTR-B



3000K

4000K



PE-VISTR-W



Transformative optic

vistina round

New

PE-VISTR-B ■
4550 lumens at 4000K
4300 lumens at 3000K

PE-VISTR-W □
4900 lumens at 4000K
4650 lumens at 3000K


CLASS 1 DIMMABLE

CCT
2 COLOURS
3000K
4000K

Key Features

- Sand black / Sand white
- Aluminium / Acrylic
- 3000K / 4000K Switchable
- Switch in ceiling can
- 42W SMD LED
- Min. drop: 400mm

RRP - £485.00

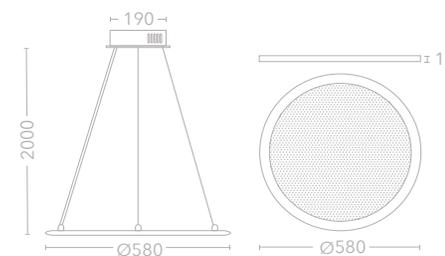


Transformative optic
(clear when off, opaque
when on)



PE-VIST-W



PE-VIST-W


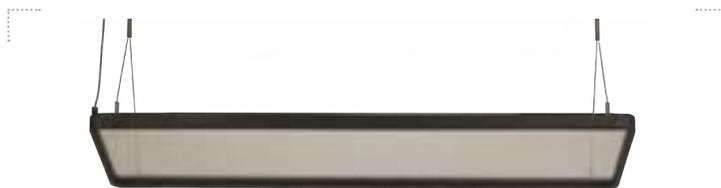


PE-VIST-B



Adjustable suspension cable

Min. suspension spacing (a) : 720mm
 Max. suspension spacing (b) : 1020mm

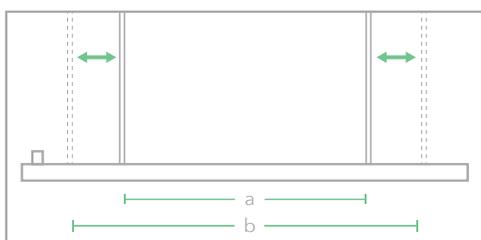

vistina long

New

PE-VIST-B ■
 5100 lumens at 4000K
 4750 lumens at 3000K

PE-VIST-W □
 5700 lumens at 4000K
 5250 lumens at 3000K


CLASS 1 DIMMABLE

CCT 2 COLOURS
 3000K
 4000K

Key Features

- Sand black / Sand white
- Aluminium / Acrylic
- 3000K / 4000K Switchable
- Switch in ceiling can
- 50W SMD LED
- Min. drop: 300mm

RRP - £635.00

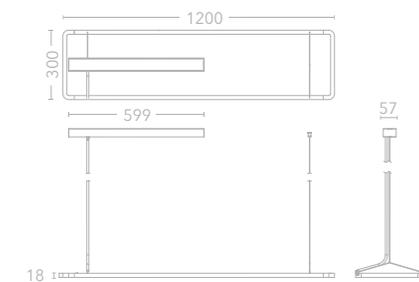

Transformative optic
 (clear when off, opaque
 when on)



CE-LINO2-B



CE-LINO2-W



CE-LINO2-W

lino 2 pendant / flush

CE-LINO2-B ■
3850 lumens at 4000K
3650 lumens at 3000K


CE-LINO2-W □
3900 lumens at 4000K
3700 lumens at 3000K



Key Features

- Sand black / Sand white
- Aluminium / Polycarbonate
- 3000K / 4000K switchable
- Switch in body of fitting
- 37W SMD LED direct (down only)
- Min. drop: 150mm
- Includes flush mounting kit

RRP - £225.00



For detailed drawings and specifications along with help & advice, visit <https://www.projectcollection.co.uk/all-products>



New





ara 60cm

PE-ARA60-B ■
2400 lumens at 4000K
2250 lumens at 3000K

PE-ARA60-W □
2500 lumens at 4000K
2300 lumens at 3000K

RRP - £350.00

ara 100cm

PE-ARA100-B ■
5200 lumens at 4000K
4900 lumens at 3000K

PE-ARA100-W □
5700 lumens at 4000K
5400 lumens at 3000K

RRP - £595.00


ara 150cm



PE-ARA150-B ■
6800 lumens at 4000K
6300 lumens at 3000K

PE-ARA150-W □
8300 lumens at 4000K
7800 lumens at 3000K

RRP - £1,350.00

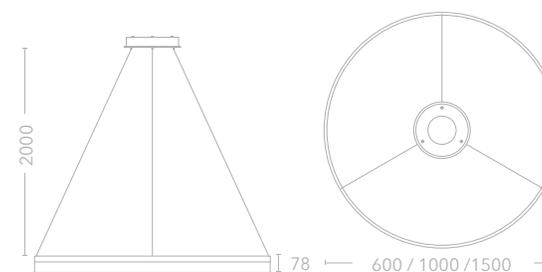

Key Features

- Sand black / Sand white
- Aluminium / Acrylic
- 3000K / 4000K Switchable
- Switch in ceiling can
- Min. drop: 400 / 500 / 750mm
- Flush alternative: see pg. 34



PE-ORB120-BS



PE-ORB120-WS



PE-ORB120-BS

illuminated
inside ring



PE-ORB120-BS

orbit 120cm

PE-ORB120-BS ■
3200 lumens at 4000K
3000 lumens at 3000K



PE-ORB120-WS □
4200 lumens at 4000K
3800 lumens at 3000K



Key Features

- Sand black / Sand white
- Aluminium / Silicone diffuser
- 3000K / 4000K Switchable
- Switch in ceiling can
- 69W SMD LED
- Min. drop: 900mm
- White ceiling can

RRP - £625.00





PE-COM2-BS



PE-COM2-WS



PE-COM2-BS



PE-COM2-WS

Direct (downwards) illumination

compass 2m

PE-COM2-BS ■
4800 lumens at 4000K
4300 lumens at 3000K

PE-COM2-WS □
6000 lumens at 4000K
5500 lumens at 3000K





CLASS 1



Key Features

- Sand black / Sand white
- Aluminium / Opal polycarbonate
- 3000K / 4000K Switchable
- Switch in ceiling can
- 102W SMD LED
- Min. drop: 900mm
- White ceiling can

RRP - £1,540.00

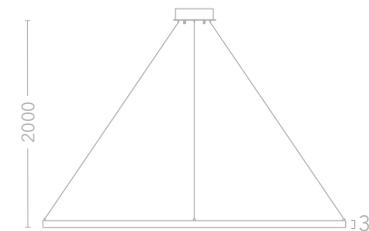




PE-E78-B



3000K



4000K



Cross section showing light direction



PE-E78-B



FL-E78-WS



FL-E78-WS

eternity 78cm pendant

PE-E78-B ■
3600 lumens


PE-E78 □
4700 lumens



Key Features

- Sand black / Sand white
- Aluminium / Polycarbonate diffuser
- 3000K
- 85W SMD LED
- Min. drop: 700mm

RRP - £595.00

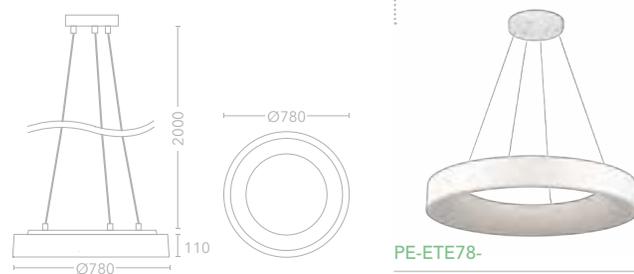


PE-E78-

eternity 55cm pendant

PE-E78-B ■
2450 lumens at 4000K
2100 lumens at 3000K


PE-E78 □
2500 lumens at 3000K



RRP - £272.00

eternity 55cm flush

FL-E78-WS □
2000 lumens at 3000K
2200 lumens at 4000K



RRP - £262.00



Key Features

- Sand black / Sand white
- Aluminium / Polycarbonate diffuser
- 3000K or 4000K, switched in ceiling can (-BS/-WS version only)
- 39W SMD LED
- Min. drop: 450mm
- Ceiling or wall mounted (flush only)






PE-CLIP



PE-CLIP

clip pendant

PE-CLIP
2650 lumens

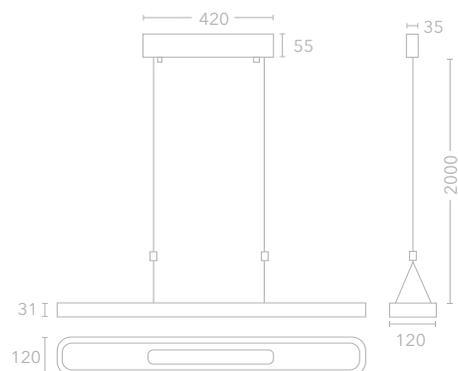

CLASS 1 DIMMABLE

Key Features

- Sand white
- Aluminium / Acrylic
- 3000K
- 43W SMD LED
- Min. drop: 350mm

RRP - £232.00



AM-VUL4



AM-VUL2

AM-VUL4

vulcan 2ft


AM-VUL2
18W SMD LED
1700 lumens

RRP - £34.00

vulcan 4ft

AM-VUL4 ▲
36W SMD LED
3000 lumens

RRP - £37.00

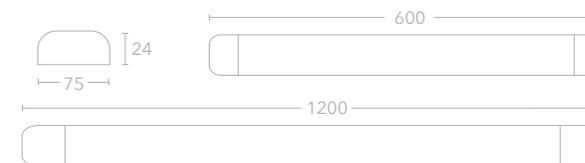

CLASS 2

Key Features

- Opal / Aluminium body /
- White end caps
- Aluminium / Polycarbonate
- 3000K
- Ceiling or wall mounted



CE-VER40-W



3000K



4000K



5700K



CE-VER30-B & PA-VER-B



CE-VER(30/40)

PA-VER

verve 30cm IP44

- CE-VER30-B
- CE-VER30-W

16W SMD LED
 1450 lumens at 3000K
 1750 lumens at 4000K
 1650 lumens at 5700K

RRP - £105.00

suspension kit IP20

- PA-VER-B
- PA-VER-W

RRP - £26.00

New


verve 40cm IP44

- CE-VER40-B
- CE-VER40-W

23W SMD LED
 2100 lumens at 3000K
 2300 lumens at 4000K
 2100 lumens at 5700K

RRP - £170.00

New



CLASS 2
 DIMMABLE
 IP 44
 CCT 3 COLOURS
 3000K
 4000K
 5700K

Key Features


- Sand black / Sand white
- Aluminium / PC diffuser
- 3000K / 4000K / 5700K
- Switchable
- Switch on back of fitting
- Rear or side cable entry
- Ceiling or wall mounted
- Add PA-VER to suspend from
- 200mm up to 2m, n.b. IP20



ripple 40cm

New

FL-RPL40 □
 2350 lumens at 3000K
 2450 lumens at 4000K



CLASS 1



DIMMABLE



Key Features

- Sand white
- Steel / Acrylic
- 3000K / 4000K switchable
- CCT switch in body of fitting
- 25W SMD LED
- Ceiling or wall mounted

RRP - £290.00




CE-PERI30

peri 30cm IP54

New

CE-PERI30 □
 1400 lumens at 3000K
 1800 lumens at 4000K
 1600 lumens at 5000K



CLASS 2



DIMMABLE



IP 54



Key Features

- White
- Polycarbonate
- 3000K / 4000K / 5000K switchable
- CCT switch in body
- 17W SMD LED
- Rear or side cable entry
- Ceiling or wall mounted

RRP - £90.00



CE-ORC40



FL-SAT40-W



3000K

4000K

saturn 60cm

FL-SAT60-W ▲


3700 lumens

RRP - £384.00

FL-SAT60-WS*

53W SMD LED

RRP - £397.00



saturn 40cm

FL-SAT40-W ▲


2500 lumens

RRP - £254.00

FL-SAT40-WS*

38W SMD LED

RRP - £275.00



CLASS 1 DIMMABLE



Key Features

Matt white / Frosted

Steel / Acrylic diffuser


3000K or 4000K, switch in body

(-WS version only)

*For lumen output, see website

Ceiling or wall mounted

New

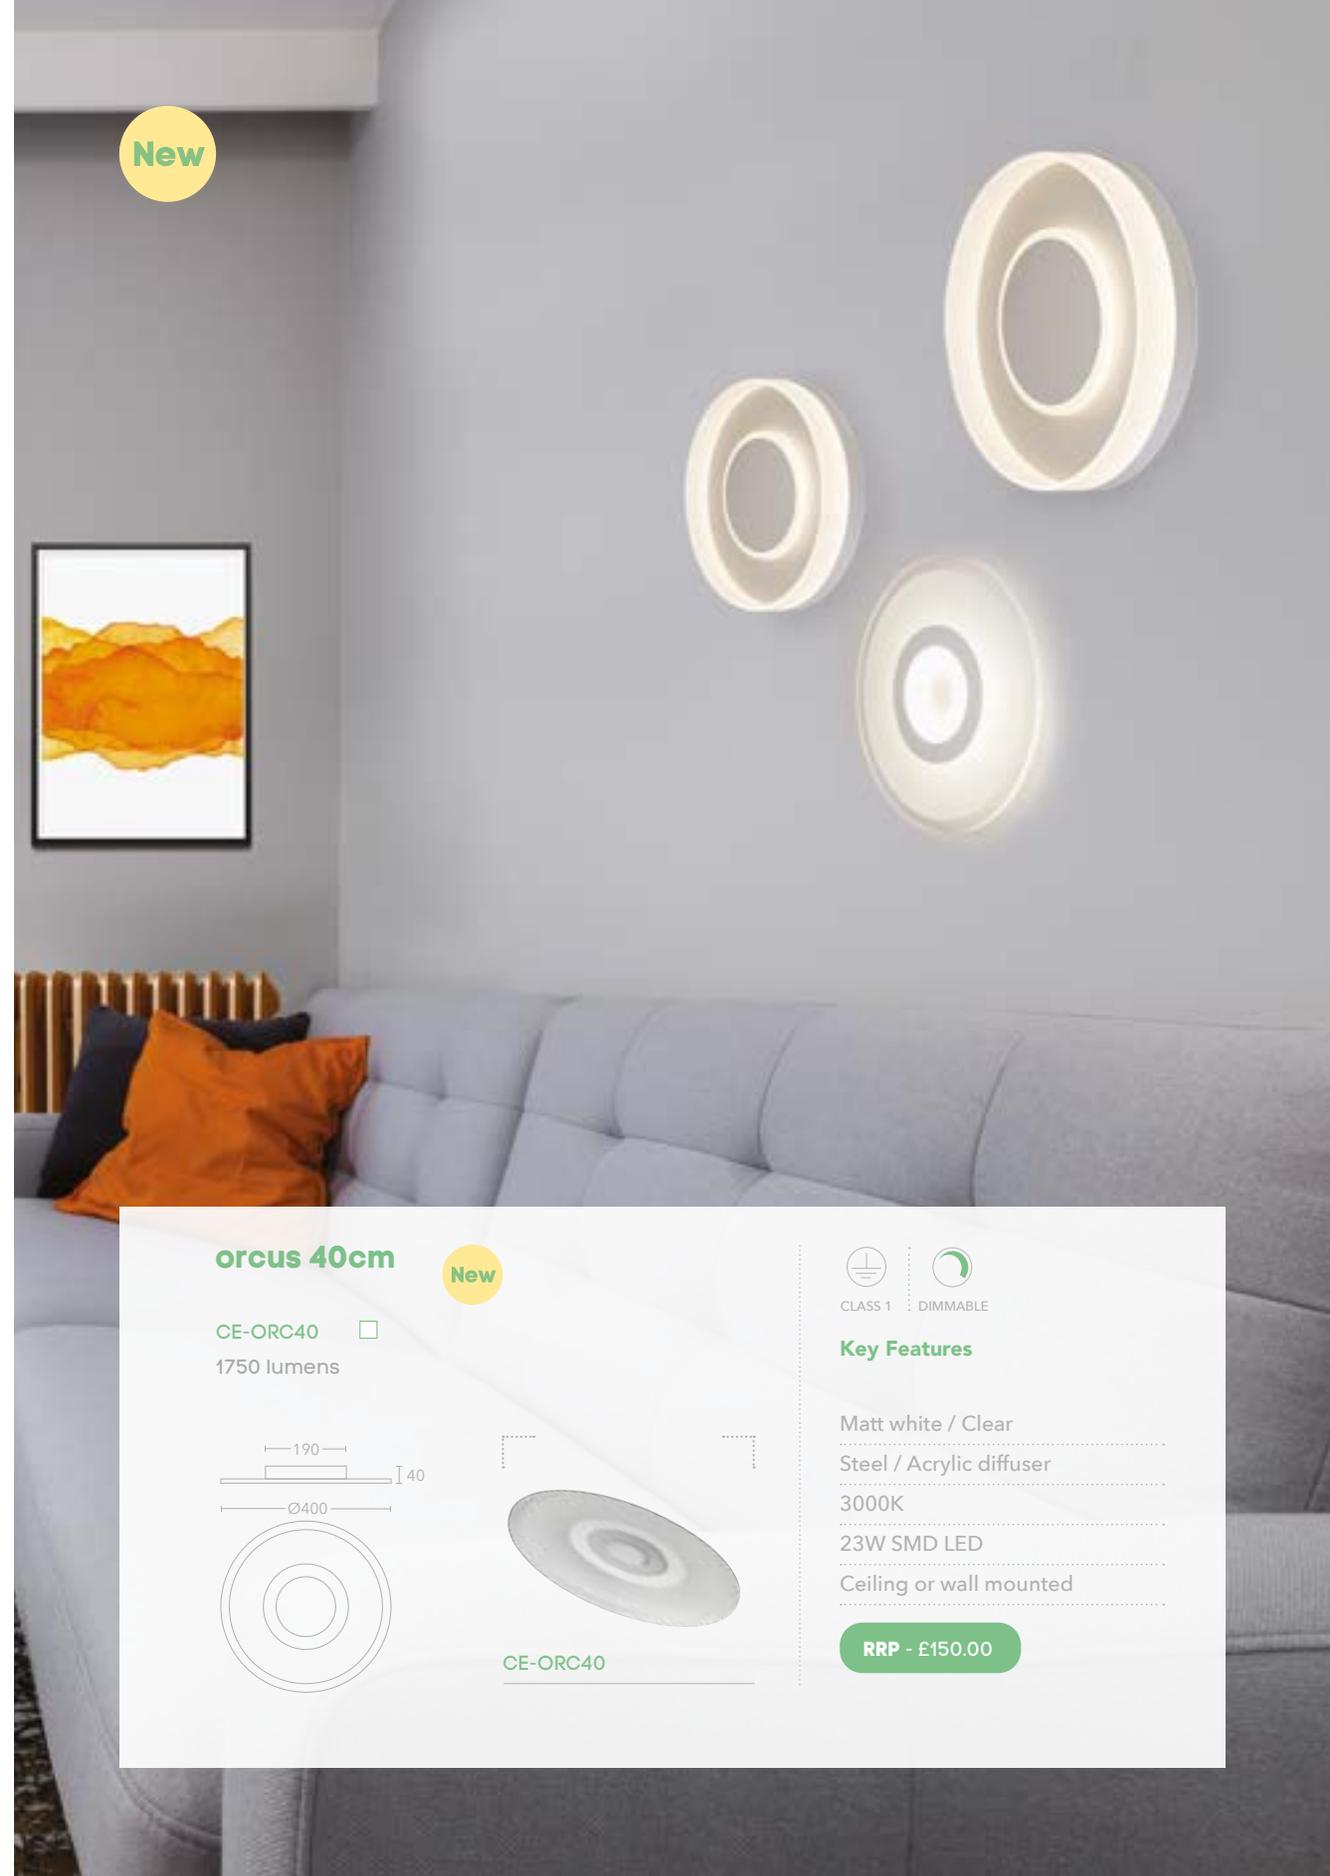

orcus 40cm

New

CE-ORC40

1750 lumens



CLASS 1 DIMMABLE

Key Features

Matt white / Clear

Steel / Acrylic diffuser

3000K

23W SMD LED

Ceiling or wall mounted

RRP - £150.00



CE-ORC40



FL-ADM40-W



FL-BAN35-B

FL-ADM40-W



FL-ADM40-W

FL-ADM30-W




FL-BAN35-B

FL-BAN23-B

andaman 40cm IP44


FL-ADM40-W □
25W SMD LED
1200 lumens



RRP - £147.00

andaman 30cm IP44

FL-ADM30-W □
14W SMD LED
600 lumens



RRP - £253.00




Key Features

Clear glass / Matt white inner glass
Glass / Steel
3000K
Ceiling or wall mounted

banda 35cm IP44


FL-BAN35-B ■
27W SMD LED
650 lumens



RRP - £115.00

banda 23cm IP44

FL-BAN23-B ■
14W SMD LED
350 lumens



RRP - £145.00



Key Features

Matt white glass / Black
Glass / Steel
3000K



CE-AND-W



CE-AND-B

CE-AND-B



CE-SWI-W



CE-SWI-W

Shown at 90°



CE-SWI-B



New

swivel

New


CE-SWI-B



CE-SWI-W



Simultaneous 90° pivot and rotation



RRP - £25.50

andromeda ceiling



ANTI-GLARE


CE-AND-B



CE-AND-W



90° pivot, 350° rotation



RRP - £51.60



CLASS 2




DIMMABLE

Key Features

Sand black / Sand white

Aluminium

GU10 max. 10W LED only

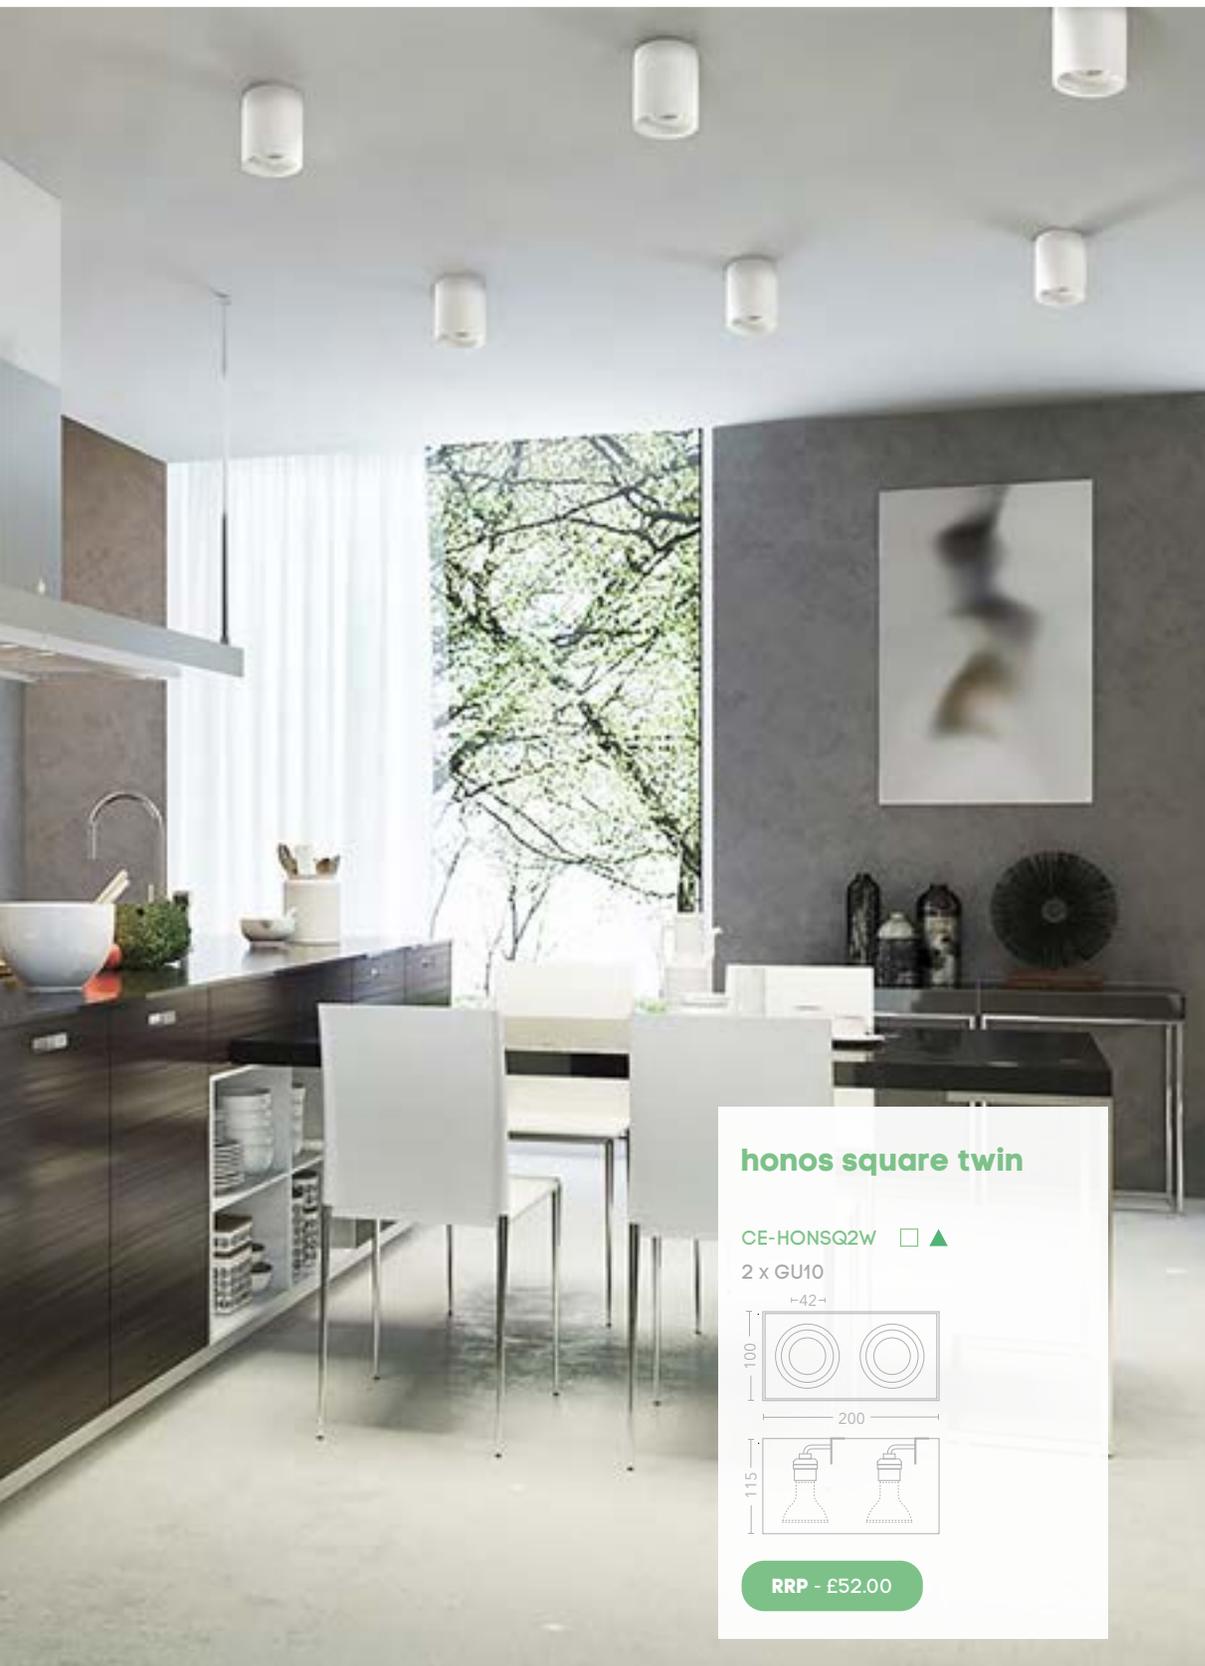

honos square twin

CE-HONSQ2W ▲


2 x GU10

RRP - £52.00



honos round


CE-HONRB ■
CE-HONRW □
1 x GU10



RRP - £24.00

honos square

CE-HONSQB ■
CE-HONSQW □
1 x GU10



RRP - £30.00



Key Features

Sand black / Sand white

Aluminium

GU10 max. 10W LED only

20° tilt, 360° rotation



FL-LYRAB



PE-LYRAB




PE-ART-B

PE-ART-W



PE-APO-B


PE-APO-W

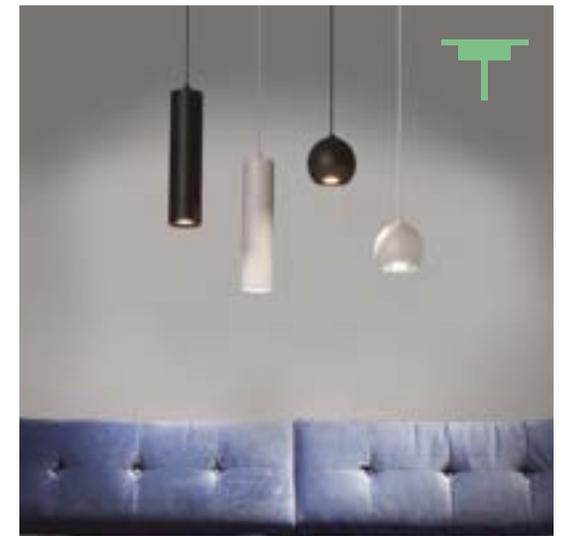

lyra pendant

PE-LYRAB ■ ▲

895 lumens




RRP - £80.00

lyra flush

FL-LYRAB ■ ▲

895 lumens



RRP - £65.00



Key Features

Sand black / gold interior

Aluminium

3000K


10W CREE COB LED

Min. drop: 200mm (pendant only.)

artemis GU10 pendant

PE-ART-B ■

PE-ART-W □




RRP - £52.00

apollo GU10 pendant

PE-APO-B ■

PE-APO-W □

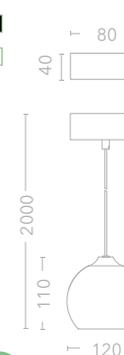

RRP - £48.00



Key Features

Sand black / Sand white

Steel

GU10 max. 10W LED only

Min. drop: 200mm

Compatible with pendant track adapter

Compatible with pendant track adapter



recessed



See Pg. 94-97 for the rest of the Moon product range




Retrofit

Suitable for installation into downlight holes Ø60-Ø85mm

moon recessed

New

- SP-MOOR-B ■
- SP-MOOR-W □



- CLASS 2
- DIMMABLE

Key Features

- Sand white or Sand black
- GU10 LED only / Max. 10W
- 350° Rotation
- 90° Pivot

RRP - £28.00



DL-POLW



PL-POLW



PL-POLW



DL-POLW


PL-POLW



polo

New

DL-POLW



RRP - £39.00


polo trimless

New

PL-POLW



Ceiling must be skimmed after installation



RRP - £41.00



Key Features

- Sand white
- Aluminium
- GU10 Max. 10W LED only
- 90° pivot, 350° rotation
- Use in any position from fully recessed to fully extended
- Distance to front of lamp : 12mm



New



DL-MINW



Size comparison:
PL-SLIMW (left) vs PL-MINW (right)
See pg. 64 for PL-SLIMW

What is a
GU11?



recessed plaster




PL-MINW

PL-MINW

mini

New

DL-MINW



RRP - £14.00


mini trimless

New

PL-MINW



Ceiling must be skimmed
after installation



RRP - £16.00



Key Features

Sand white

Aluminium

GU11 Max. 10W LED only

30° tilt, 360° rotation

Distance to front of lamp: 30mm




DL-WWW



DL-WWW

GU10 wall washer

DL-WWW

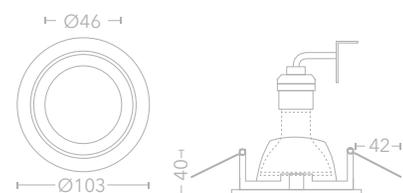

CLASS 2 DIMMABLE

Key Features

- Matt white
- Die cast aluminium
- 1 x GU10, max. 10W, LED only
- 60° tilt

RRP - £12.00



DL-WASH




DL-WASH

LED wall washer

DL-WASH

650 lumens



CLASS 2 DIMMABLE

Key Features

- Sand white / Aluminium
- 3000K
- 9W COB LED
- 40° tilt, 350° rotation
- Mains dimmable driver included
- Tilt angle locked by screw if required

RRP - £43.00




recessed



grid 1

- DL-GRID1BB
- DL-GRID1WB
- DL-GRID1WW

CUT OUT 82x82mm
MIN DEPTH 135mm



RRP - £13.00



Key Features

- Matt black / Matt white & black / Matt white
- Aluminium
- GU10 Max. 10W LED only
- 15° tilt, 360° rotation
- Distance to front of lamp: 30mm

grid 3

- DL-GRID3BB
- DL-GRID3WB
- DL-GRID3WW

CUT OUT 250x82mm
MIN DEPTH 135mm




RRP - £40.00

grid 2

- DL-GRID2WW
- DL-GRID2WB
- DL-GRID2BB

CUT OUT 167x82mm
MIN DEPTH 135mm




RRP - £23.00



Key Features

- Matt black / Matt white & black / Matt white
- Aluminium
- GU10 Max. 10W LED only
- 15° tilt, 360° rotation
- Distance to front of lamp: 30mm

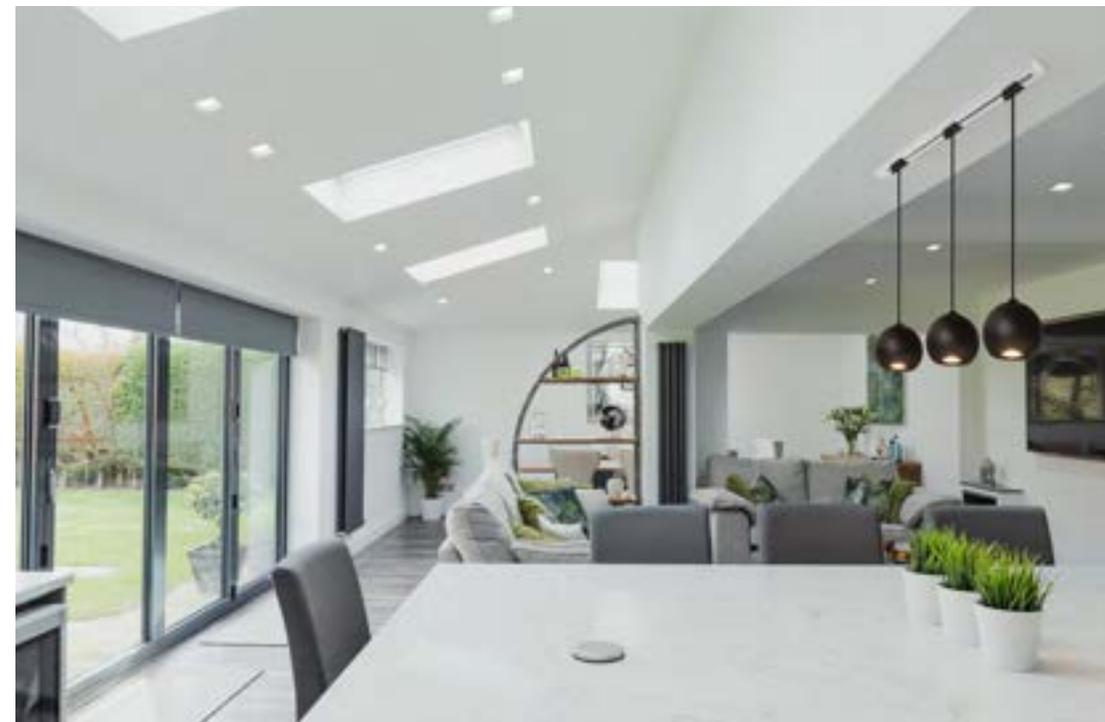


recessed



grid 1 FR  FIRE RATED


- DL-GRID1FRWW
- DL-GRID1FRWB



RRP - £21.50

grid 2 FR  FIRE RATED

- DL-GRID2FRWW
- DL-GRID2FRWB
- DL-GRID2FRBB

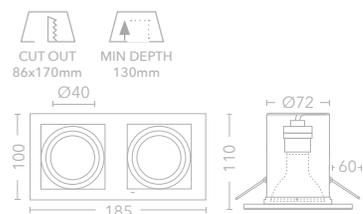

RRP - £40.00


-  CLASS 1
-  DIMMABLE

Key Features

- Matt black / Matt white & black / Matt white
- Steel
- GU10 Max. 10W LED only
- 15° tilt, 360° rotation
- Distance to front of lamp: 30mm
- Tested in 30, 60 and 90 minute ceilings

grid 1 FR trimless  FIRE RATED

- PL-GRID1FR




RRP - £27.00

-  CLASS 1
-  DIMMABLE

Key Features

- Matt white
- Steel
- GU10 Max. 10W LED only
- 15° tilt, 360° rotation
- Ceiling must be skimmed after installation
- Distance to front of lamp: 26mm
- Tested in 30, 60 and 90 minute ceilings

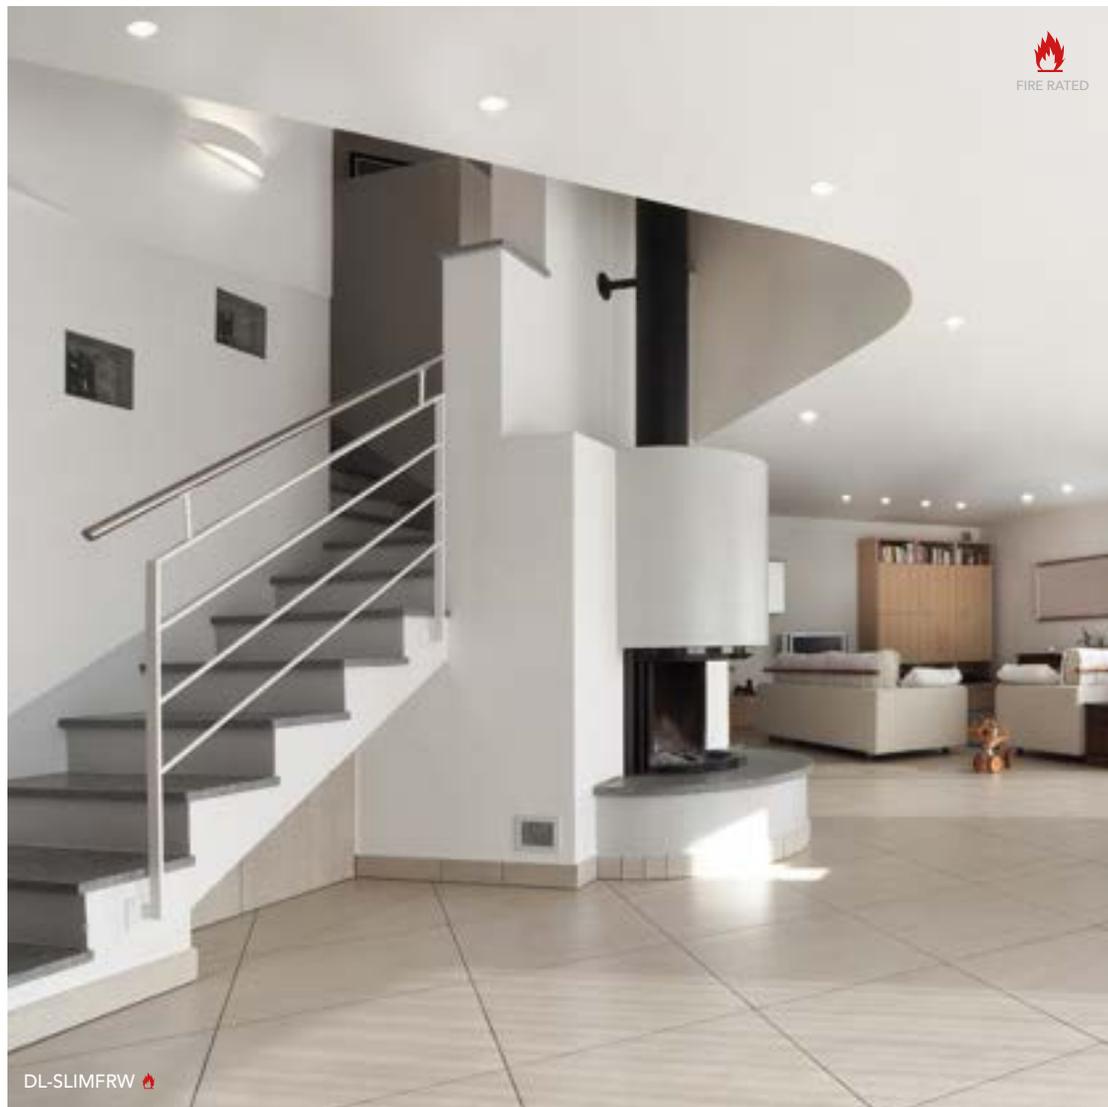


DL-SLIMFRW

slim trim adjustable FR



DL-SLIMFRW



RRP - £20.00

DL-SLIMFRW



Key Features

- Matt white
- Steel
- GU10 Max. 10W LED only
- 20° tilt
- Distance to front of lamp: 33mm
- Tested in 30, 60 and 90 minute ceilings




DL-SLIMW



DL-SLIMSQW

slim trim adjustable


DL-SLIMB
DL-SLIMW



RRP - £12.00

slim trim square adjustable

DL-SLIMSQB
DL-SLIMSQW



RRP - £12.00



Key Features

- Matt black / Matt white
- Aluminium
- GU10 Max. 10W LED only
- 45° tilt
- Distance to front of lamp: 32mm



recessed

DL-SLIMB

DL-SLIMW

DL-SLIMSQB

DL-SLIMSQW



DL-SLIMFRW

FIRE RATED



DL-SLIMIPW

recessed



DL-SLIMIPB

DL-SLIMIPW


slim trim
IP65 FR

FIRE RATED

DL-SLIMIPFRW

CUT OUT
72mm

MIN DEPTH
120mm



DL-SLIMIPFRW

RRP - £21.00

- CLASS 1
- DIMMABLE
- IP 65

Key Features

- Matt white
- Steel
- 1 x GU10, max 10W LED only
- Anti-glare
- GU10 lampholder
- Tested in 30, 60 and 90 minute ceilings
- Distance to front of lamp: 26mm


slim trim
IP65

DL-SLIMIPB

DL-SLIMIPW

CUT OUT
70mm

MIN DEPTH
135mm



RRP - £15.00

- CLASS 2
- DIMMABLE
- IP 65

Key Features

- Matt black / Matt white
- Aluminium
- 1 x GU10, Max. 10W LED only
- Lamp change from the front, mounting sleeve remains in the ceiling
- Distance to front of lamp: 27mm




DL-SOPWB



glacier round IP65

DL-GLAR ▲

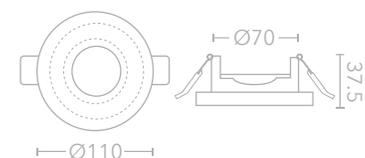

RRP - £24.00




Key Features

Acrylic & Polished chrome
1 x GU10, max. 10W LED only

sophie IP65



DL-SOPWB / ■

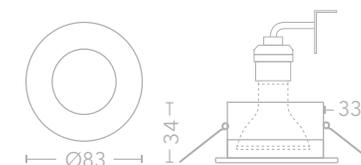

RRP - £14.50




Key Features

Matt White
1 x GU10, max. 10W LED only
Suitable for indoor or outdoor use
Comes with both black and white covers in the box
Distance to front of lamp: 6mm



PL-SLIMW

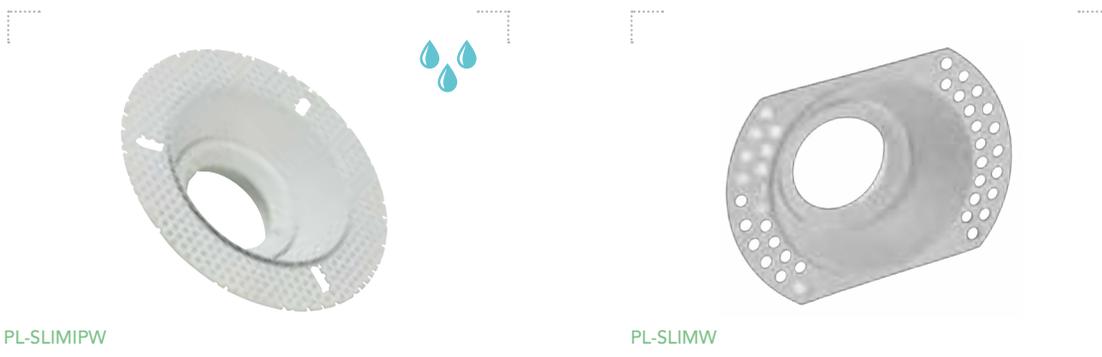


PL-SLIMIPW

PL-SLIMW

slim trimless IP65


PL-SLIMIPW



RRP - £17.20

slim trimless adjustable

PL-SLIMW



RRP - £15.05

- CLASS 2
- DIMMABLE
- ANTI-GLARE

Key Features

- Sand white
- Aluminium
- GU10 Max. 10W LED only
- Ceiling must be skimmed after installation
- Distance to front of lamp: 30mm




PL-SLIMFRW

slim trimless adjustable FR

- CLASS 1
- DIMMABLE
- ANTI-GLARE
- FIRE RATED

PL-SLIMFRW



RRP - £24.00




PL-SLIMFRW

Key Features

- Matt white
- Steel
- GU10 Max. 10W LED only
- 20° tilt
- Ceiling must be skimmed after installation
- Fire rated: Tested in 30, 60 and 90 minute ceilings
- Distance to front of lamp: 35mm



PL-SAB1-B

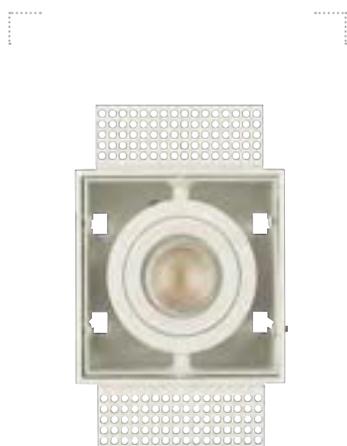

PL-SAB1-W



PL-SAB1-B



PL-SAB2-W



PL-SAB2-W



PL-SAB2-W




PL-SAB1-B

recessed plaster

sablons 1 trimless

New

- PL-SAB1-B
- PL-SAB1-W




RRP - £33.00

sablons 2 trimless

New

- PL-SAB2-B
- PL-SAB2-W



RRP - £56.00

CLASS 1 DIMMABLE

Key Features


- Sand black / Sand white
- Aluminium
- GU10 Max. 10W LED only
- 45° gimbal
- Ceiling must be skimmed after installation
- Distance to front of lamp: 17mm

Choose solid plaster trimless lighting...

where you have an already plastered wall or ceiling, and you're not planning to skim the surface again.

After the product installed it is a decorators job to infill the gap with a flexible filler / caulk, sand to a smooth finish and paint the surface including the interior of the fitting.

installing solid plaster trimless lighting

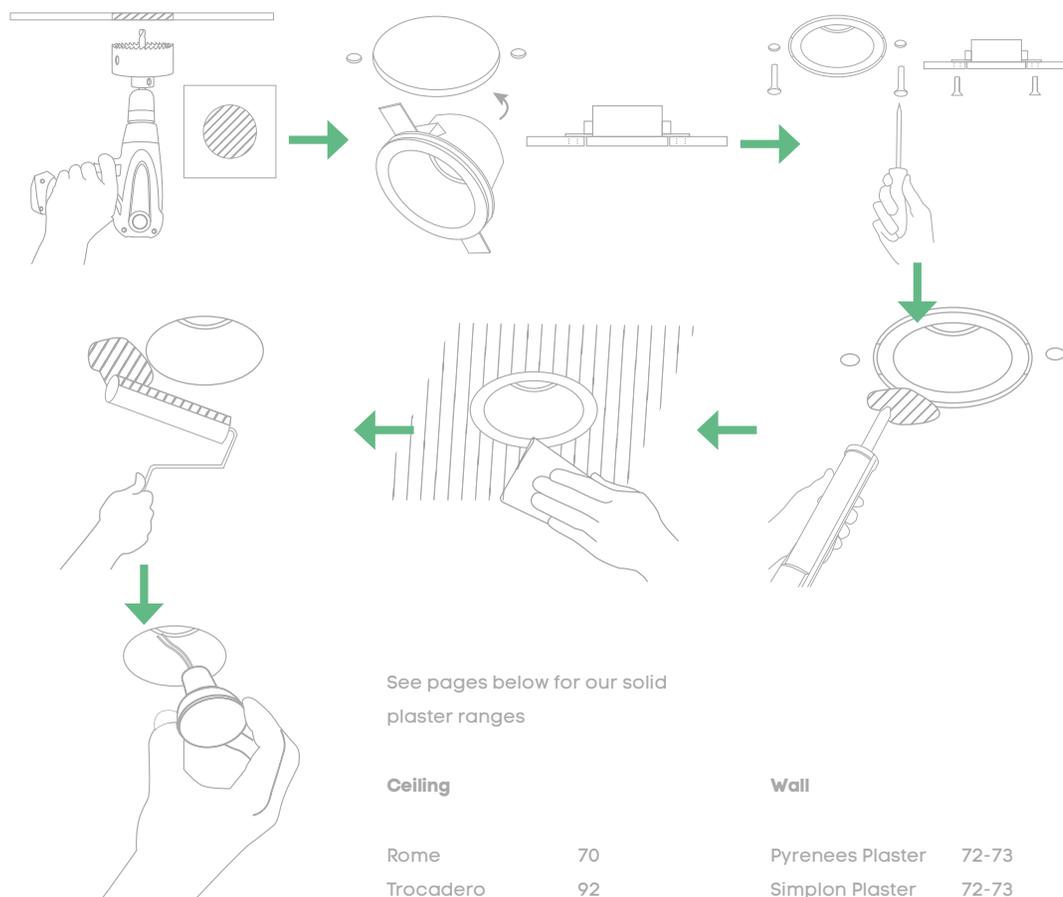



Choose metal trimless lighting...

where you are installing into a wall or ceiling that has yet to be skimmed, or will be reskimmed.

After the metal frame is installed in the wall or ceiling the plasterer skims the surface with a 3mm layer of plaster skim. The frames have a 3mm lip for the plasterer to skim up to.

installing metal frame trimless lighting

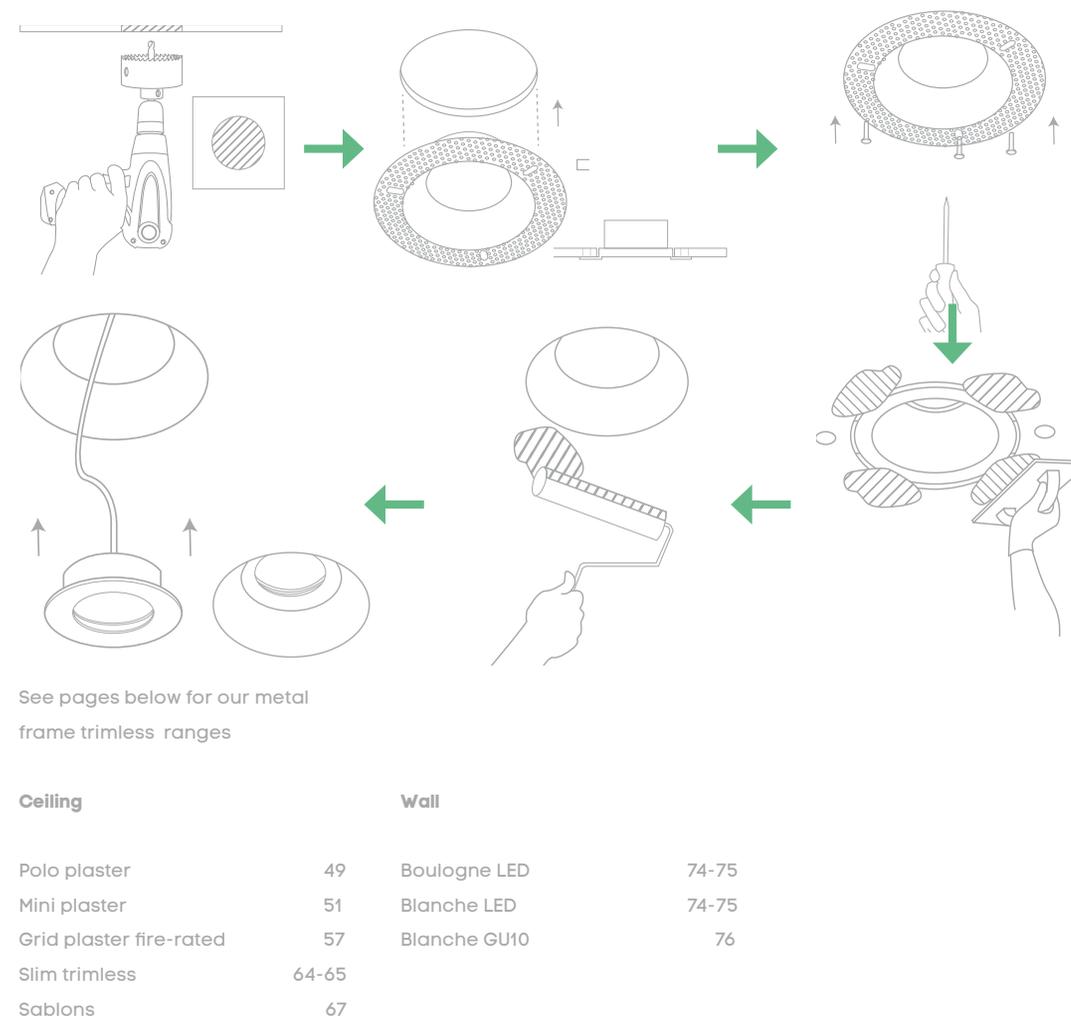

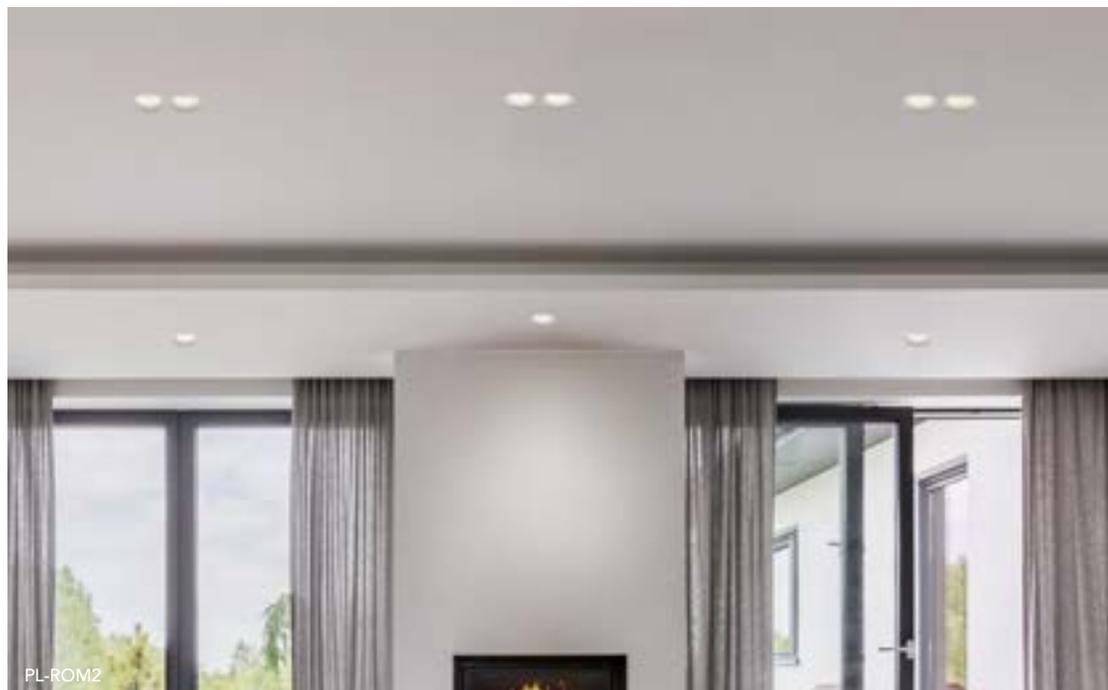

PL-ROM2




PL-ROM1 / PL-ROM2



PL-ROM2

rome


PL-ROM1 



RRP - £18.90

rome 2

PL-ROM2 




RRP - £29.00



Key Features

- White plaster
- GU10, max. 10W LED only
- How to fit guide - see website
- If skimming the ceiling, complete this before installing

 This symbol represents a white plaster finish

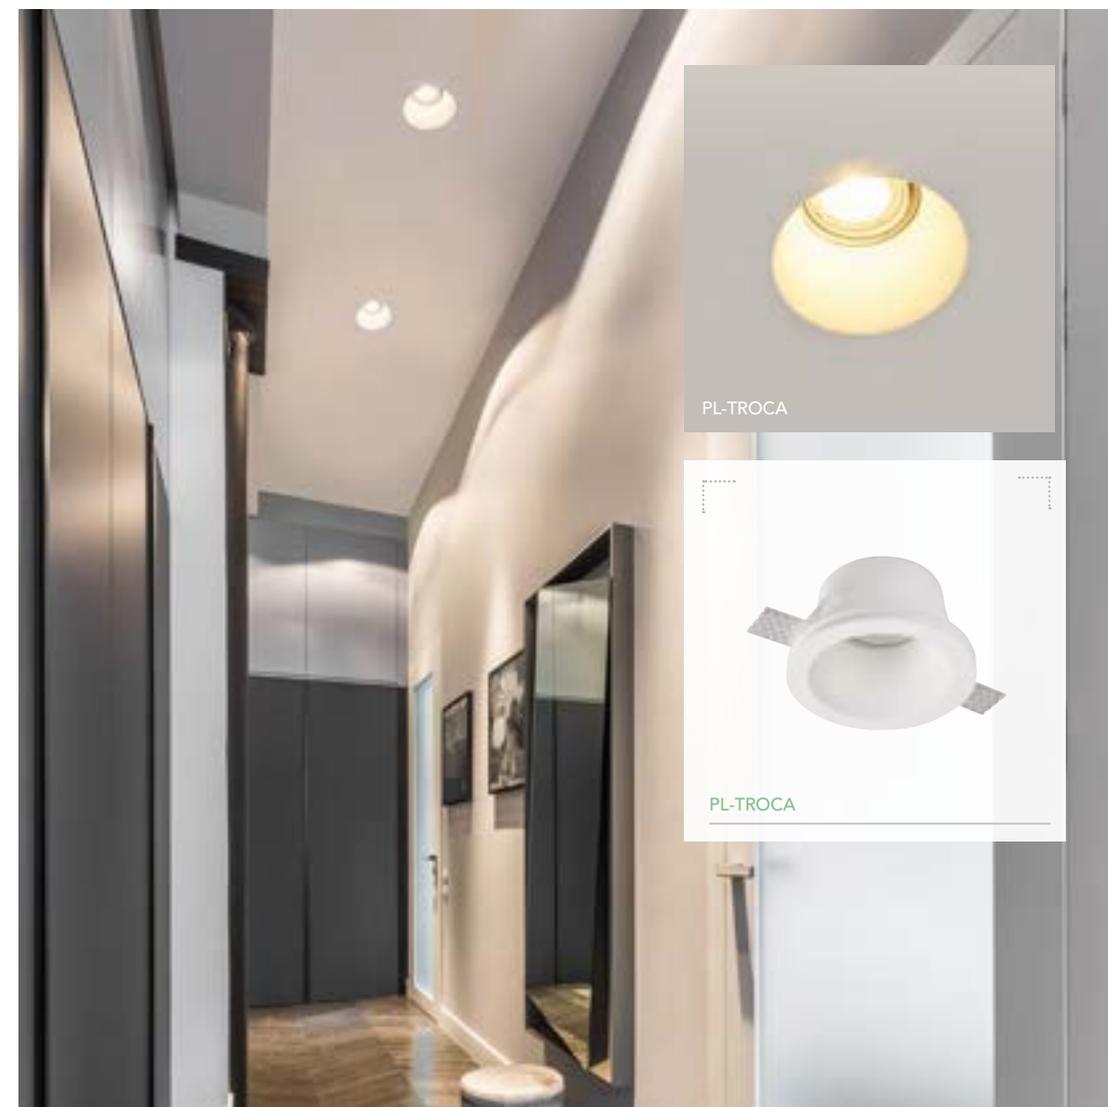

PL-TROCA




PL-TROCA

trocadero adjustable

PL-TROCA 

Tilt angle: 40°



RRP - £26.00



Key Features

- White plaster
- 1 x GU10, max. 10W LED only
- How to fit guide - see website
- If skimming the ceiling, complete this before installing

 This symbol represents a white plaster finish



PL-PYREN



PL-PYREN27



PL-PYREN



PL-SIMPL



PL-SIMPL27



PL-SIMPL

pyrenees plaster

Item no.	Finish	Power	CCT	Lumens	Dimmable	Replaceable LED module
PL-PYREN	<input type="checkbox"/> White plaster	350mA	3000K ●	60	Dimmable*	MOD1W
PL-PYREN27	<input type="checkbox"/> White plaster	350mA	2700K ●	60	Dimmable*	MOD1W2700


simplon plaster

Item no.	Finish	Power	CCT	Lumens	Dimmable	Replaceable LED module
PL-SIMPL	<input type="checkbox"/> White plaster	350mA	3000K ●	60	Dimmable*	MOD1W
PL-SIMPL27	<input type="checkbox"/> White plaster	350mA	2700K ●	60	Dimmable*	MOD1W2700

* Dimmable when used with a dimmable driver

pyrenees plaster


1W CREE XPE Power LED
95 lumens / 30° beam angle



RRP - £54.00

simplon plaster

1W CREE XPE Power LED
95 lumens / 30° beam angle



RRP - £56.00



Key Features

- White plaster
- Driver supplied separately
- Dimmable when used with a dimmable driver
- Not suitable for use in solid walls
- How to fit guide - see website
- If skimming the wall, complete this before installing
- Suitable for plasterboard thickness 9-15mm



PL-BOU



PL-BOU



PL-BOU27



PL-BOU

boulogne LED

Item no.	Finish	Power	CCT	Lumens	Dimmable	Replaceable LED module
PL-BOU	<input type="checkbox"/> White plaster	350mA	3000K ●	60	Dimmable*	MOD1W
PL-BOU27	<input type="checkbox"/> White plaster	350mA	2700K ●	60	Dimmable*	MOD1W2700

blanche LED


Item no.	Finish	Power	CCT	Lumens	Dimmable	Replaceable LED module
PL-BLA	<input type="checkbox"/> White plaster	350mA	3000K ●	60	Dimmable*	MOD1W
PL-BLA27	<input type="checkbox"/> White plaster	350mA	2700K ●	60	Dimmable*	MOD1W2700

*Dimmable when used with a dimmable driver

For detailed drawings and specifications along with help & advice, visit <https://www.projectcollection.co.uk/all-products>



PL-BLA



PL-BLA




PL-BLA27



PL-BLA

boulogne LED


1W CREE XPE Power LED
95 lumens / 30° beam angle



RRP - £64.50

blanche LED

1W CREE XPE Power LED
95 lumens / 30° beam angle



RRP - £64.50



Key Features

Matt white / Steel

Driver supplied separately

Dimmable when used with a dimmable driver


Not suitable for use in solid walls

Wall must be skimmed after installation



blanche GU10

PL-BLAGU10



Key Features

- Matt white
- Steel
- 1 x GU10, Max.10W LED only
- Not suitable for use in solid walls
- Wall must be skimmed after installation

RRP - £55.90




recessed wall

Item no.	Finish	Power	CCT	Lumens	IP Rating	Dimmable	Replaceable LED module	Class
IPR-WSLB	Black	350mA	3000K	45	65	Yes*	MOD1WIP	III
IPR-WSLB-AC	Black	220 - 240V**	3000K	45	65	No	MOD1WIP230V	I
IPR-WSLB27	Black	350mA	2700K	45	65	Yes*	MOD1WIP-2700	III
IPR-WSLB27-AC	Black	220 - 240V**	2700K	45	65	No	MOD1WIP230V-2700	I
IPR-WSLW	White	350mA	3000K	95	65	Yes*	MOD1WIP	III
IPR-WSLW-AC	White	220 - 240V**	3000K	95	65	No	MOD1WIP230V	I
IPR-WSLW27	White	350mA	2700K	95	65	Yes*	MOD1WIP-2700	III
IPR-WSLW27-AC	White	220 - 240V**	2700K	95	65	No	MOD1WIP230V-2700	I

*Dimmable when used with a dimmable driver ** Integrated Driver

simplon IP65


1W CREE XPE Power LED
95 lumens / 30° beam angle

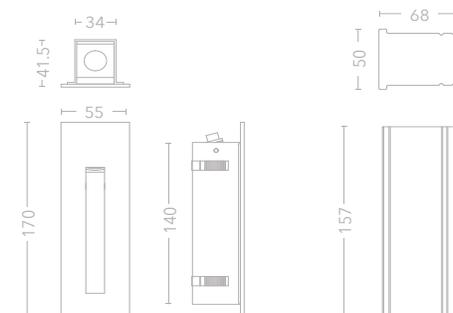

Key Features

- Sand white / Sand black
- Aluminium
- Mounting box included for solid wall applications

See Price List for RRP

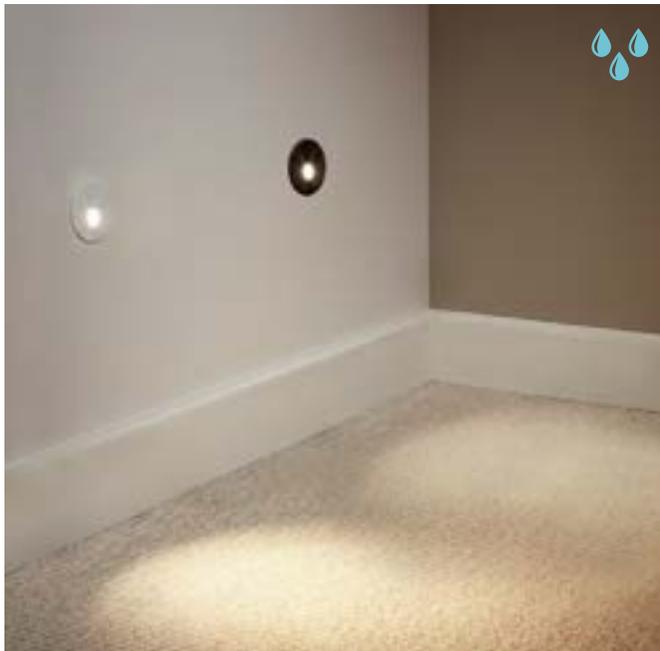

IPR-WRW

IPR-WRB



Item no.	Finish	Power	CCT	Lumens	IP Rating	Dimmable	Replaceable LED module	Class
IPR-WRB	Black	350mA	3000K	50	65	Yes*	MOD1WIP	III
IPR-WRB-AC	Black	220 - 240V**	3000K	50	65	No	MOD1WIP230V	I
IPR-WRB27	Black	350mA	2700K	50	65	Yes*	MOD1WIP-2700	III
IPR-WRB27-AC	Black	220 - 240V**	2700K	50	65	No	MOD1WIP230V-2700	I
IPR-WRW	White	350mA	3000K	95	65	Yes*	MOD1WIP	III
IPR-WRW-AC	White	220 - 240V**	3000K	95	65	No	MOD1WIP230V	I
IPR-WRW27	White	350mA	2700K	95	65	Yes*	MOD1WIP-2700	III
IPR-WRW27-AC	White	220 - 240V**	2700K	95	65	No	MOD1WIP230V-2700	I


*Dimmable when used with a dimmable driver ** Integrated Driver

pyrenees IP65

1W CREE XPE Power LED
95 lumens / 30° beam angle



CUT OUT
60mm

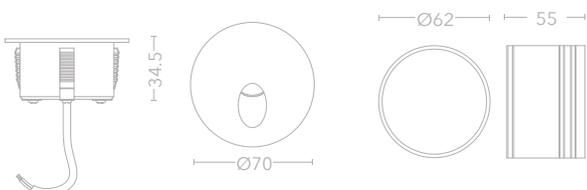

Key Features

- Sand white / Sand black
- Aluminium
- Mounting sleeve included for solid wall applications

See Price List for RRP





IPR-HOLSSAG



IPR-HOLSS



IPR-HOXSS



IPR-HOLSS




IPR-HOXCP

holborn IP65

IPR-HOLSS

1W CREE XPE Power LED
90 lumens / 120° beam angle




RRP - £41.00

hoxton IP65

IPR-HOXSS ▲ IPR-HOXCP

1W CREE XPE Power LED
90 lumens / 120° beam angle



RRP - £37.00



Key Features

- Polished chrome or satin stainless steel 316 / Aluminium body
- 3000K
- Very shallow profile
- Driver supplied separately
- Fittings must be wired in series




IPR-HOLSS

holborn anti glare IP65

IPR-HOLSSAG



IPR-HOLSSAG



RRP - £46.00



Key Features

- Satin stainless steel 316
- 1W CREE XPE / 3000K
- 25 lumens / Beam angle: 120°
- Very shallow profile
- Driver supplied separately
- Fittings must be wired in series


diana

DL-DIA-W

DL-DIA-W



DL-DIA-W



RRP - £16.00



Key Features

- Sand white finish / Die cast body
- 1W Olsen LED / 3000K
- 95 lumens / Beam angle: 30°
- Driver supplied separately
- Fittings must be wired in series



track & spot



TR-AND-W

TR-AND-B

andromeda GU10 track spot

- TR-AND-B
- TR-AND-W

- CLASS 2
- DIMMABLE
- SWITCH

Key Features

Sand white / Sand black


Aluminium

1 x GU10, max. 10W LED only

350° Rotation / 90° Tilt

On/Off switch on track connector

Suitable for use with longer lamp lengths

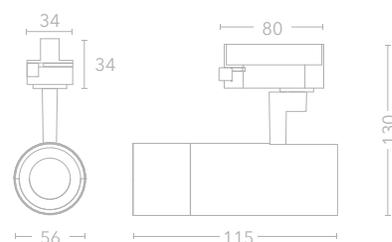

RRP - £42.00



TR-TAU-W

TR-TAU-B


taurus LED track spot

- TR-TAU-B
- TR-TAU-W

New

1350 lumens at 4000K, 15W
1150 lumens at 3000K, 15W

Taurus is supplied with a default setting of 3000K, 15W

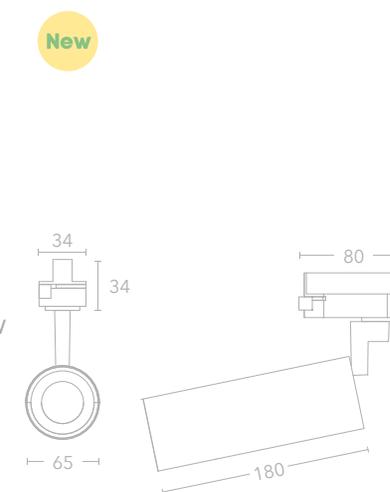

RRP - £74.00

- CLASS 2
- SWITCH



Key Features

Sand white / Sand black

Power switchable 10W, 12W, 15W

2 CCT Switchable 3000K / 4000K

On/Off switch on track connector

Switches located in body of fitting, see image above

350° Rotation / 90° Tilt

CRI>90

New



TR-LIB-WW

TR-LIB-B

TR-ORI-W


TR-ORI-B

TR-LAS-W

TR-LAS-B

libra GU10 track spot


- TR-LIB-B ■
- TR-LIB-WW □



RRP - £28.00

orion GU10 track spot

- TR-ORI-B ■
- TR-ORI-W □



RRP - £26.00

- CLASS 2
- DIMMABLE
- SWITCH

Key Features

Sand black / Sand white

Aluminium

1 x GU10, max. 10W LED only


350° Rotation / 90° Tilt

On/Off switch on track connector

laser GU10 track spot

New

- TR-LAS-B ■
- TR-LAS-W □



RRP - £32.00

- CLASS 2
- DIMMABLE
- SWITCH

Key Features

Sand black / Sand white

Aluminium

1 x GU10, max. 10W LED only

350° Rotation / 90° Tilt

On/Off switch on track connector

See pages below for the rest of the laser family:

laser pendant	13
laser spot	92
laser reader	115



Pick your pendant...

project
collection
searchlight





TR-PEN-B

Scan here to view a wide selection of pendants



TR-PEN-W


Our pendant track adapter allows you to suspend pendants of your choosing to complement and enhance your track lighting scheme. Add pendants over a kitchen island, hotel reception desk or restaurant tables to allow your design ideas to come to life.

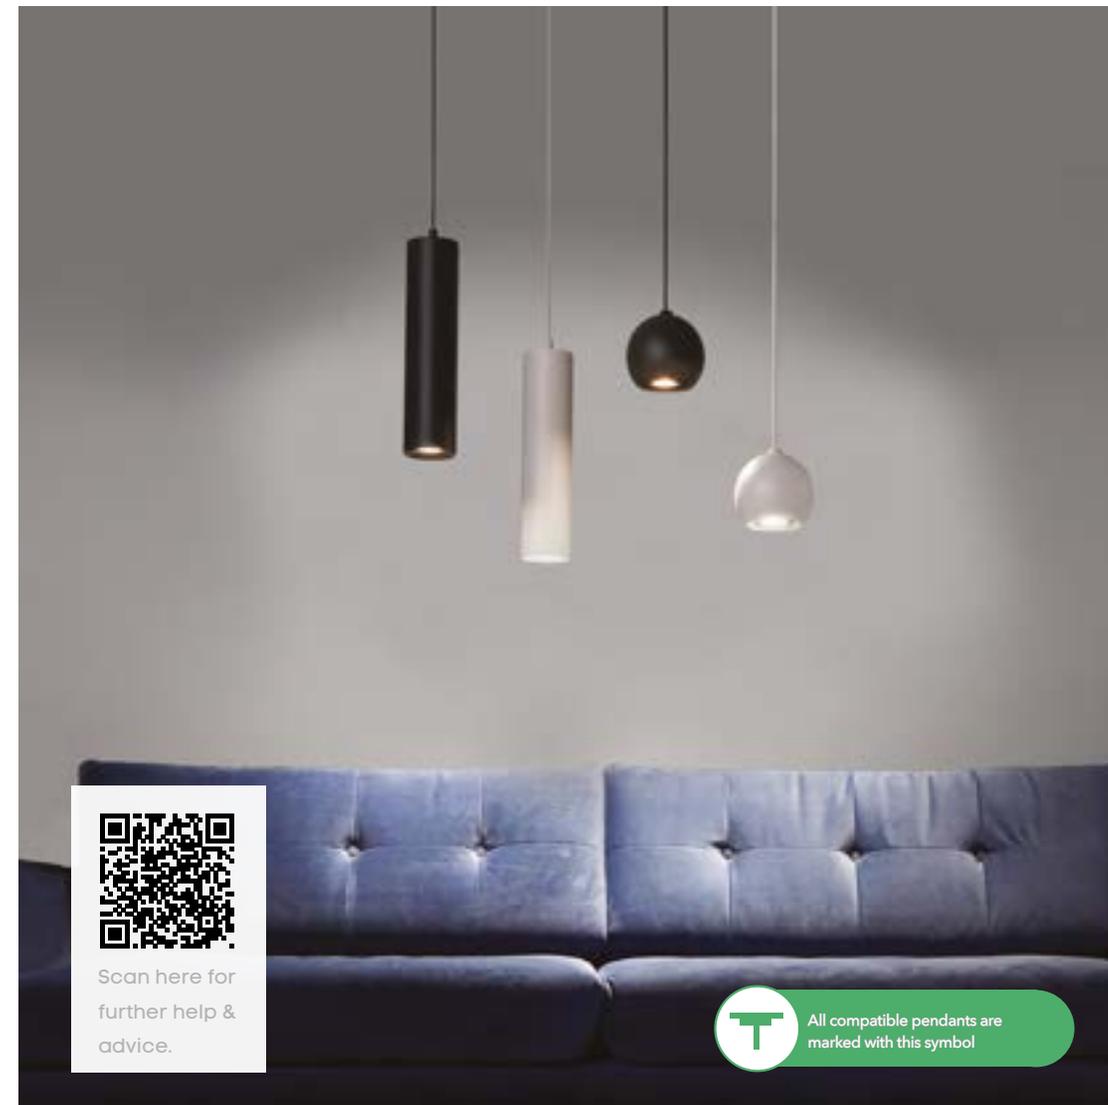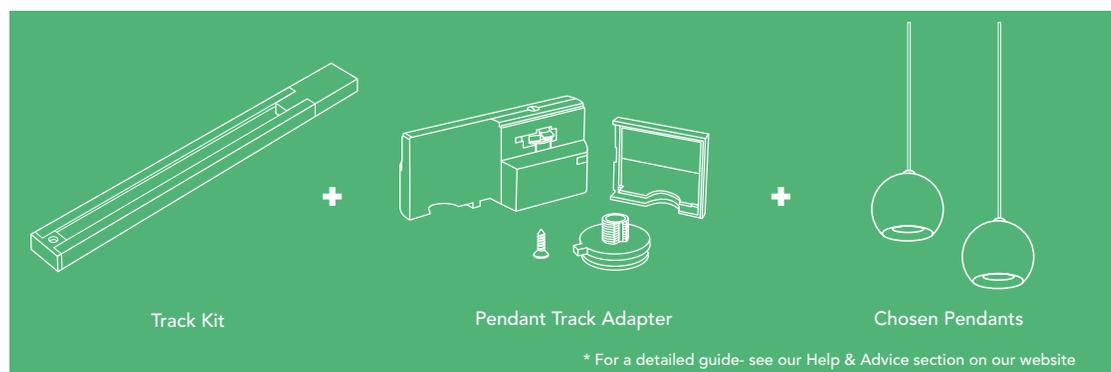

pendant track adapter

- TR-PEN-B ■
- TR-PEN-W □

Use with any 220-240V pendant under 2kg that is suspended by a single power cable



TR-PEN-B

- CLASS 1
- DIMMABLE
- 230 VOLTS

Key Features

Used to convert mains voltage pendants meeting the following criteria:

1. Suspended by a single power cable
2. Maximum 2kg weight

RRP - £28.00



TR-1W / TR-1B

1m track kit

- TR-1B
- TR-1W

Includes live end & end cap
L1000 x W35 x H18mm

1m track only

- TR-T1-B
- TR-T2-W

L1000 x W35 x H18mm

2m track kit

- TR-2B
- TR-2W

Includes live end & end cap
L2000 x W35 x H18mm

2m track only

- TR-T2-B
- TR-T2-W

L2000 x W35 x H18mm




CLASS 1 DIMMABLE 230 VOLTS

Key Features

- Extensive range of track & connectors
- Ideal for applications where fittings need to be moved or added
- Earth on the neutral side
- Track can be cut to any length

See Price List for RRP

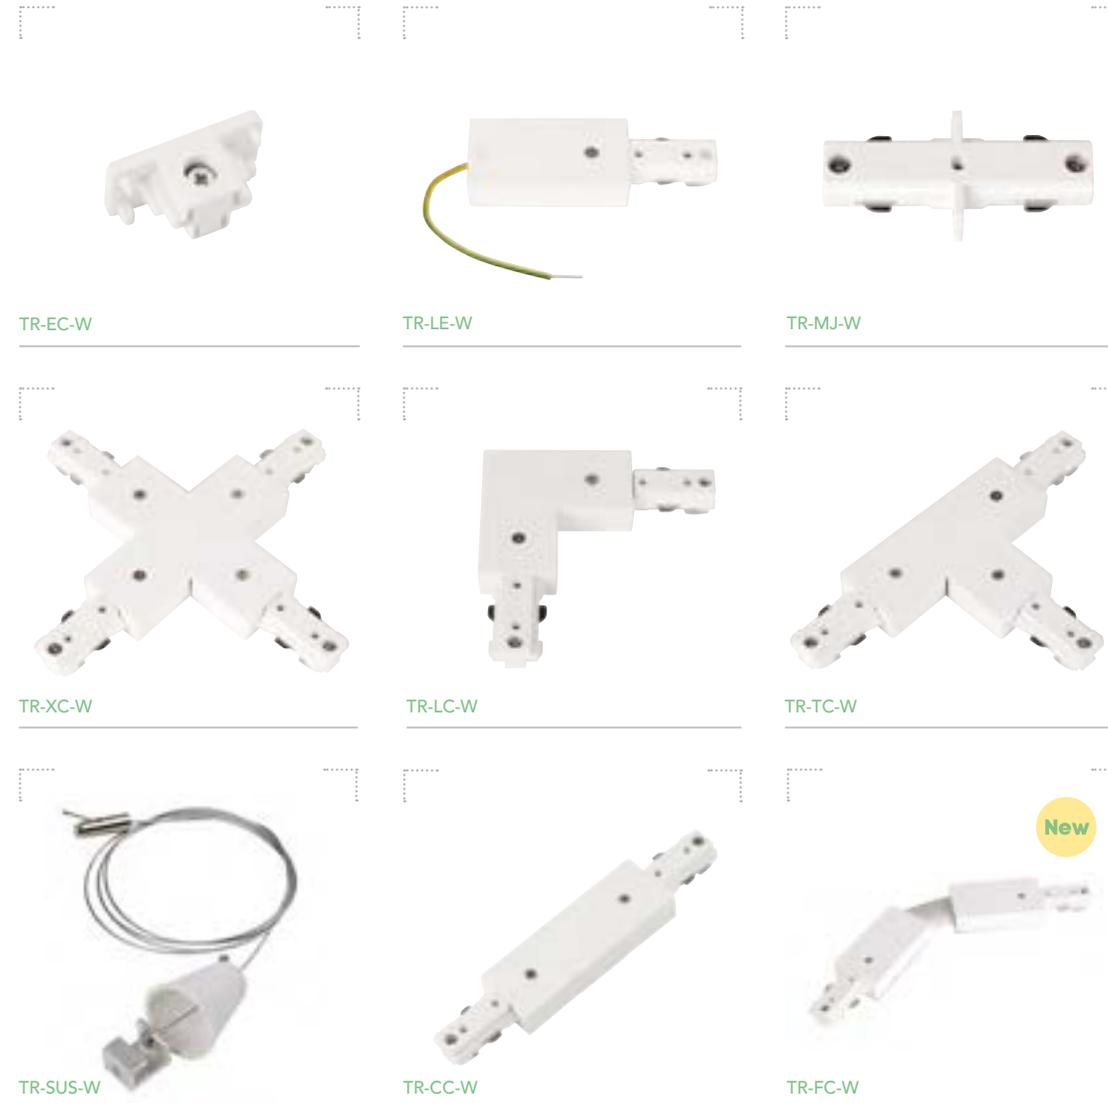

TR-EC-W

TR-LE-W

TR-MJ-W

TR-XC-W

TR-LC-W

TR-TC-W

TR-SUS-W

TR-CC-W

TR-FC-W

New

end cap

- TR-EC-B
- TR-EC-W

live end

- TR-LE-B
- TR-LE-W

mini joiner

- TR-MJ-B
- TR-MJ-W

X connector

- TR-XC-B
- TR-XC-W

L connector

- TR-LC-B
- TR-LC-W

T connector

- TR-TC-B
- TR-TC-W

3m suspension kit

- TR-SUS-B
- TR-SUS-W

centre connector

- TR-CC-B
- TR-CC-W

flexible connector

- TR-FC-B
- TR-FC-W



CLASS 1 DIMMABLE 230 VOLTS

Key Features

- Extensive range of track & connectors
- Power feed in with any connector marked
- Earth on the neutral side
- Suspension kit length is adjustable
- See our website for dimensions

See Price List for RRP



SP-LAS1S-W



SP-LAS1S-W



SP-LAS1S-B



SP-LAS1S-B

laser spot


New

- SP-LAS1S-B
- SP-LAS1S-W

- CLASS 1
- DIMMABLE
- SWITCH

Key Features


- Sand black / Sand white
- Aluminium
- 1 x GU10, max. 10W LED only
- Switch on front face
- 350° rotation, 90° pivot

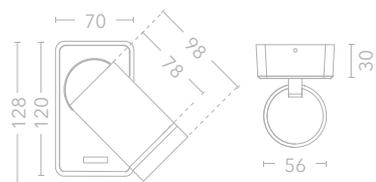

See pages below for the rest of the laser family:

- laser pendant 13
- laser GU10 track 87
- laser reader 115

RRP - £35.00

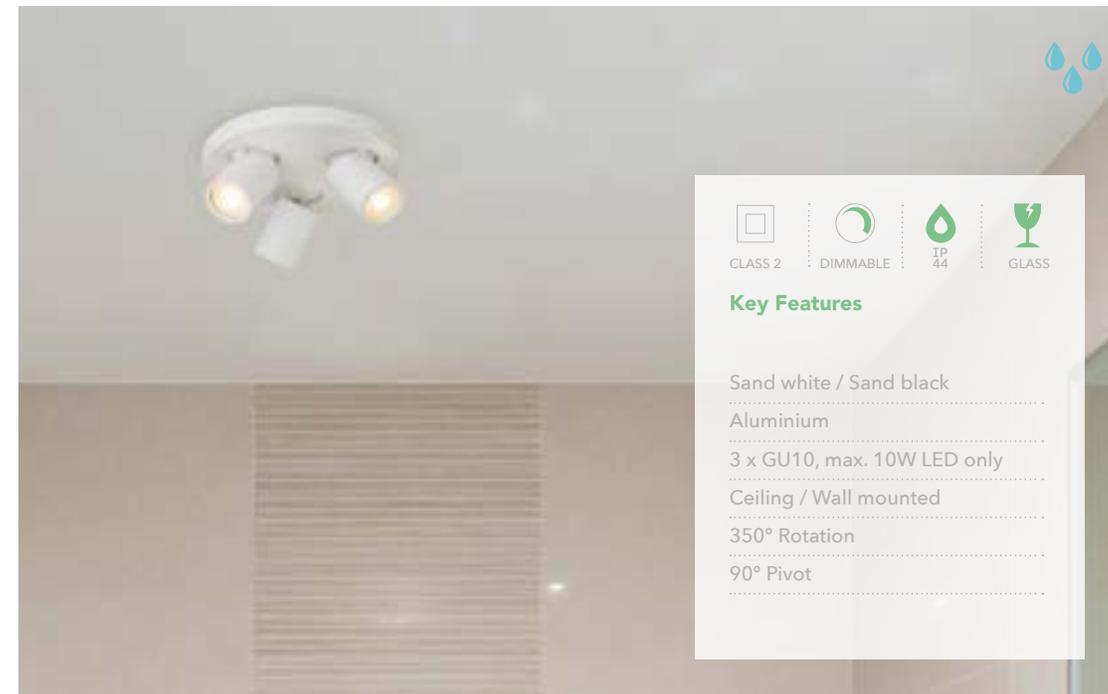

- CLASS 2
- DIMMABLE
- IP 44
- GLASS

Key Features

- Sand white / Sand black
- Aluminium
- 3 x GU10, max. 10W LED only
- Ceiling / Wall mounted
- 350° Rotation
- 90° Pivot



SP-SEL3L-W




SP-SEL3L-B



selene 3 round IP44



- SP-SEL3R-B
- SP-SEL3R-W

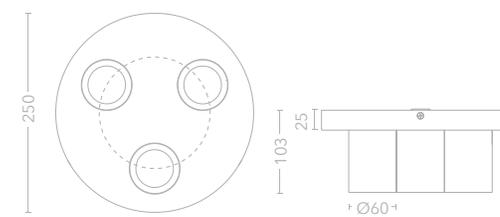


RRP - £142.00


selene 3 long IP44



- SP-SEL3L-B
- SP-SEL3L-W

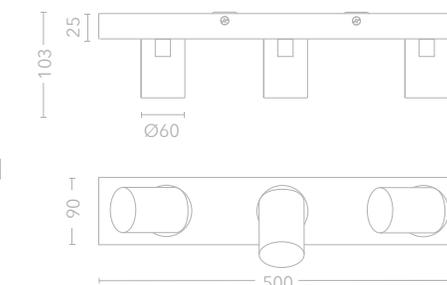

RRP - £150.50

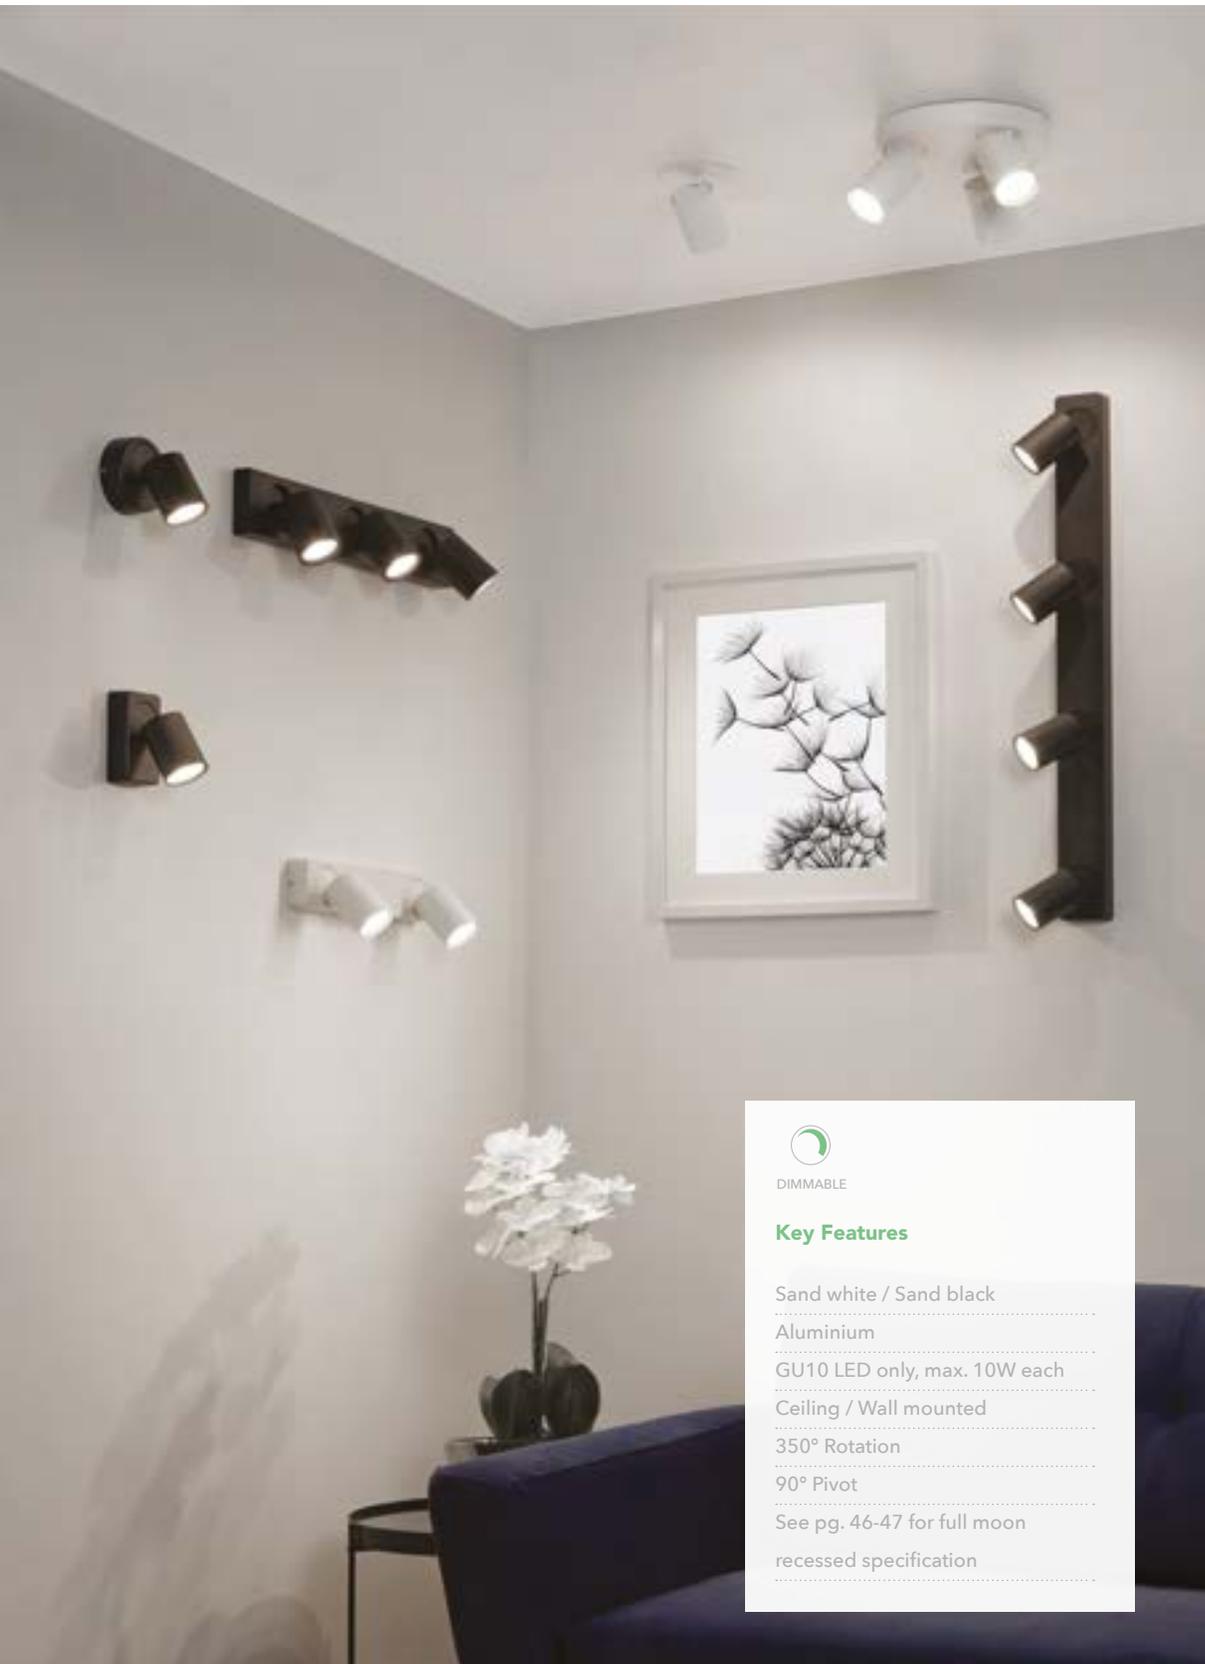

 DIMMABLE


Key Features

- Sand white / Sand black
- Aluminium
- GU10 LED only, max. 10W each
- Ceiling / Wall mounted
- 350° Rotation
- 90° Pivot
- See pg. 46-47 for full moon recessed specification



moon 1


- SP-MOO1-B
- SP-MOO1-W
- SP-MOO1S-B*
- SP-MOO1S-W*
- 1 x GU10 LED
- Class I
- *Switched



RRP - £26.00

moon 1 round


- SP-MOO1R-B
- SP-MOO1R-W
- 1 x GU10 LED
- Class I

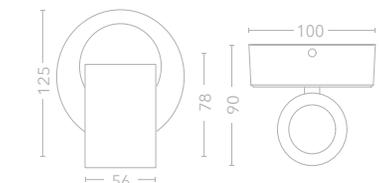

RRP - £26.00

moon recessed

- SP-MOOR-B
- SP-MOOR-W
- 1 x GU10 LED
- Class II



RRP - £28.00



SP-MOO3-B



SP-MOO3-W




SP-MOO3L-W



SP-MOO3L-B

moon 3


- SP-MOO3-B ■
- SP-MOO3-W □
- 3 x GU10 LED

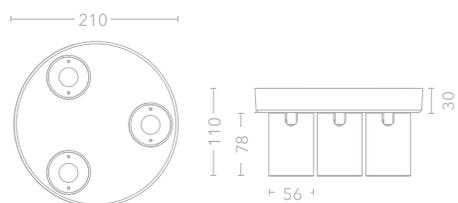

RRP - £76.00

moon 3 bar

- SP-MOO3L-B ■
- SP-MOO3L-W □
- 3 x GU10 LED

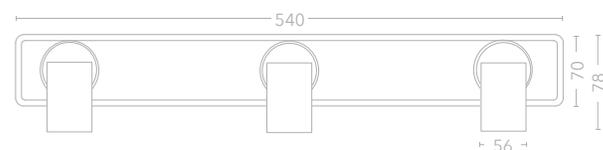

RRP - £76.00



SP-MOO3L-B / SP-MOO4-B



SP-MOO2-W




SP-MOO4-W

moon 4 bar

- SP-MOO4-B ■
- SP-MOO4-W □
- 4 x GU10 LED

moon 2 bar

- SP-MOO2-B ■
- SP-MOO2-W □
- 2 x GU10 LED

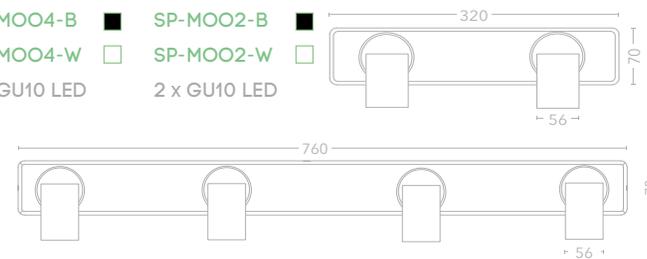

RRP - £101.00

RRP - £51.00



Key Features

- Sand white / Sand black
- Aluminium
- GU10 LED only, max. 10W each
- Ceiling / Wall mounted
- 350° Rotation
- 90° Pivot



SP-JUP1-W



SP-JUP2-B




SP-JUP1-B



SP-JUP2-W

jupiter 1


- SP-JUP1-B
- SP-JUP1-W
- 1 x ES111



RRP - £52.00

jupiter 2

- SP-JUP2-B
- SP-JUP2-W
- 2 x ES111



RRP - £96.00



Key Features

- Sand black / Sand white
- Steel / Aluminium
- Ceiling / Wall mounted
- 350° Rotation
- 120° Pivot



led strip

guide to using LED strip

① choose your strip and connectors

- 4.8W/m - feature glow of light
- 14.4W/m - ambient light

② choose your colour temperature

- Cool White is 4000K ●
- Warm White is 3000K ●

③ choose your profile

- Recessed profiles conceal lines of light
- Surface mounted profiles are easy to fit
- Use corner profile for angling the strip at 45° to a surface, particularly useful for lighting shelves, inside wardrobes and over kitchen worktops
- A profile must be used with 14.4W/m strips

④ select your driver

- Multiply the total number of metres of strip to be run from a single driver by the wattage of the strip and then add 10% e.g. 16m of 4.8W/m strip plus 10% = 85W
- Decide if your circuit needs to be dimmable
- Select the driver e.g. dimmable LST-DRD120, non-dimmable LST-DR100



4.8w/m LED strip IP65



90 lumens per Watt

- LST-5-3-IP 3000K
- LST-5-4-IP 4000K

RRP - £41.50

4.8w/m LED strip

83 lumens per Watt

- LST-5-3 3000K
- LST-4-4 4000K

RRP - £34.90



Key Features

- 5 metre roll
- CRI Ra>80
- 3528 Epistar SMD LED
- 2oz double sided PCB for longer strip runs
- Power feed-in required every 10m
- Cut distance every 100mm
- Supplied with 150mm tails on both ends

8mm inline connector

LST-CON3



RRP - £1.60


8mm corner connector / power feed in

LST-CON4

2 x Wire



RRP - £2.00

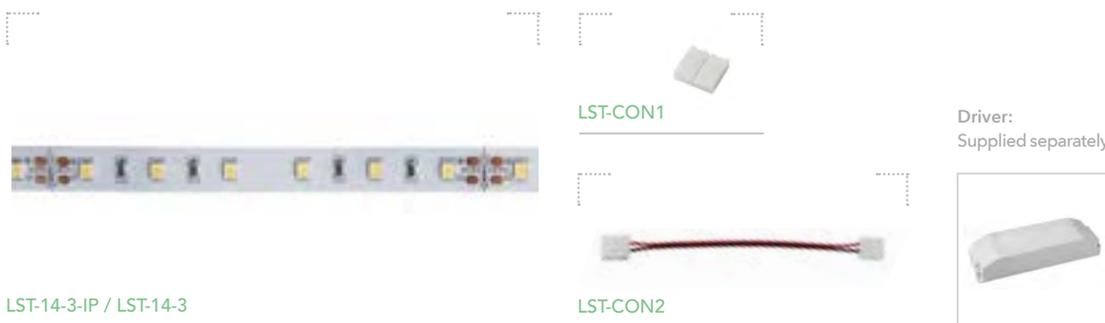

14.4w/m LED strip IP65



90 lumens per Watt

- LST-14-3-IP ● 3000K
- LST-14-4-IP ● 4000K

RRP - £54.00

14.4w/m LED strip

100 lumens per Watt

- LST-14-3 ● 3000K
- LST-14-4 ● 4000K

RRP - £42.00



Key Features

- 5 metre roll
- CRI Ra>80
- 2835 Epistar SMD LED
- 2oz double sided PCB for longer strip runs
- Power feed-in required every 10m
- Cut distance every 100mm
- Supplied with 150mm tails on both ends



10mm inline connector



RRP - £1.60

10mm corner connector / power feed in



RRP - £2.00



LST-PRO-PL1



LST-PRO-R1




LST-PRO-HS



LST-PRO-PL1

recessed aluminium profile


LST-PRO-R1
L1000 x W25 x H16mm



RRP - £14.80

aluminium heat sink


LST-PRO-HS
L1000 x W25 x H8mm



RRP - £12.30

plastered in profile

LST-PRO-PL1
L1000 x W55.5 x H15mm

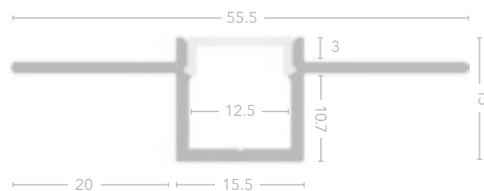

RRP - £26.00



led strip




LST-PRO-SM1



LST-PRO-COR

surface mounted aluminium profile


LST-PRO-SM1
L1000 x W17.2 x H15mm



RRP - £17.00

45° corner profile

LST-PRO-COR
L1000 x W18.1 x H18.1mm



RRP - £14.00

Key Features

- Aluminium / Opal PC diffuser
- Includes 2 x End caps
- 2 x Installation clips with surface profile



LST-DRD200



LST-DRD150



LST-DR150



LST-DR100



LST-DRD120



LST-DR75



LST-DR50

LED drivers - dimmable



LED drivers - non dimmable



TRIAC dimmable 24v 200w driver

LST-DRD200

RRP - £205.00

TRIAC dimmable 24v 150w driver

LST-DRD150

RRP - £176.20

TRIAC dimmable 24v 120w driver

LST-DRD120

RRP - £138.60



Key Features

- PWM Output
- Loading: 1-100%
- Short circuit protection
- TRIAC Dimmable
- Dimming range: 0-100%
- Leading and trailing edge
- Lutron & Clipsal C-BUS compatible

LED 24v 150w driver

LST-DR150

RRP - £133.00

LED 24v 100w driver

LST-DR100

RRP - £110.80

LED 24v 75w driver

LST-DR75

RRP - £72.20



Key Features

- Loading: 1-100%
- Over load, short circuit and thermal protection

LED 24v 50w driver

LST-DR50

RRP - £66.60

LED 24v 20w driver

LST-DR20

RRP - £23.00



Wall



WL-BLF-B



WL-BLF-W



New



blackfriars


New

- WL-BLF-B 350 lumens
- WL-BLF-W 350 lumens


- CLASS 2
- SWITCH
- FINGERPRINT RESISTANT

Key Features

- Matt black / Sand white
- Aluminium / Steel
- 3000K
- 4W Bridgelux COB LED
- Arm pivots 180°
- Head rotates 350° and pivots 90°



RRP - £70.00

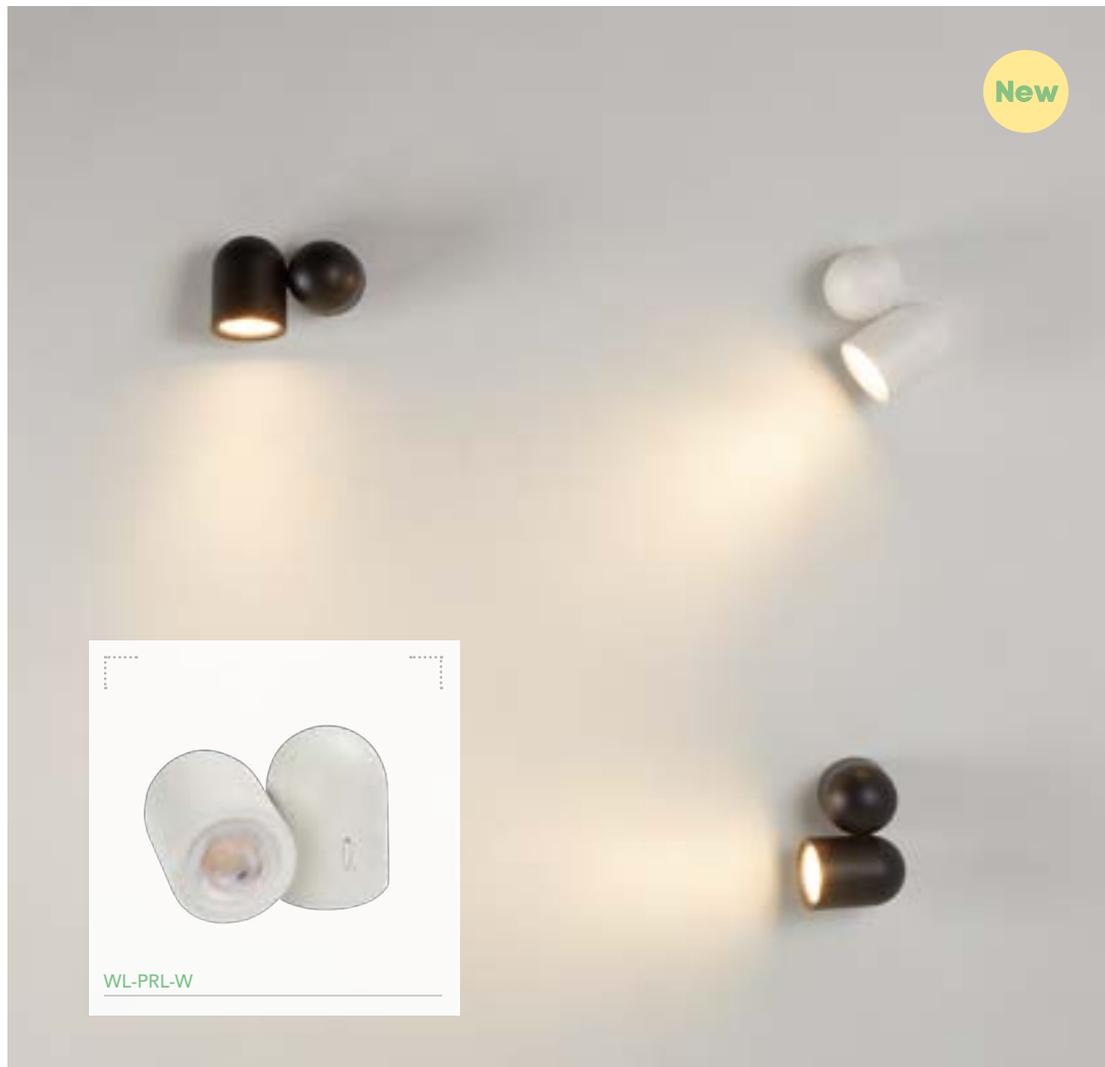

New



WL-PRL-W

perla

New

- WL-PRL-B
- WL-PRL-W

- CLASS 2
- DIMMABLE
- SWITCH

Key Features

- Sand black / Sand white
- Aluminium
- GU10 Max. 10W LED only
- 350° backplate rotation
- 180° head pivot

RRP - £39.00



WL-PRL-B



New

WL-LASR-W



WL-LASR-B



WL-LASR-B



WL-LASR-W

laser reader

New


- WL-LASR-B
- Backlight: 390 lumens
- WL-LASR-W
- Backlight: 660 lumens

- CLASS 2
- SWITCH

Key Features

- Sand black / Sand white
- Aluminium / Steel
- 3000K
- Backlight: 7W SMD LED
- GU10 Max. 10W LED only
- 90° pivot, 350° rotation

RRP - £74.00

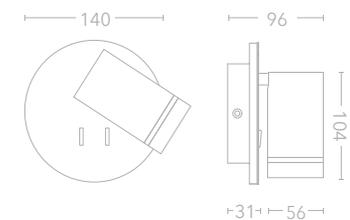

See pages below for the laser range:


laser pendant	13
laser GU10 track	87
laser spot	92



marlow usb

New

- WL-MLW-B ■
- 300 lumens
- WL-MLW-W □
- 330 lumens

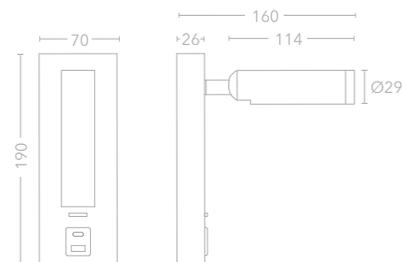

- CLASS 2
- SWITCH
- FINGERPRINT RESISTANT
- USB

Key Features

- Matt black / Sand white
- Aluminium / Steel
- 3000K
- 4W Bridgelux COB LED
- 90° pivot, 350° rotation
- 2.1 amp USB A and USB C


RRP - £95.00



dalston

New

- WL-DAL-B ■
- 380 lumens
- Backlight: 380 lumens
- WL-DAL-W □
- 380 lumens
- Backlight: 380 lumens



- CLASS 2
- SWITCH
- FINGERPRINT RESISTANT

Key Features

- Matt black / Sand white
- Aluminium / Steel
- 3000K
- Backlight: 5W SMD LED
- Spot: 4W Bridgelux COB LED
- 90° pivot, 350° rotation

RRP - £105.00



WL-ICE-B




WL-ICE-W

ice

- WL-ICE-B ■
- WL-ICE-W □

Backlight: 280 lumens
Reading light: 170 lumens

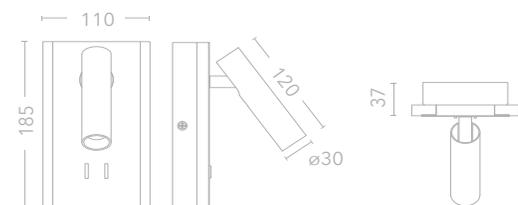

Key Features

- Sand black / Sand white
- Steel / Acrylic
- 3000K
- 8.5W SMD LED
- 3W Power LED
- 90° pivot, 350° rotation

RRP - £134.00



Light off in closed position



WL-MAR-B




WL-MAR-SN

marylebone recessed



- WL-MAR-B ■
- WL-MAR-SN ■

320 lumens
320 lumens

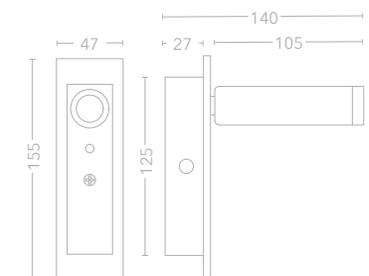

Key Features

- Matt black / Satin nickel
- Steel / Aluminium
- 3500K
- 5W Bridgelux COB LED
- 90° pivot, 350° rotation
- Contact switch - off in the closed position

RRP - £50.00



SH-VICLED-AB



SH-VICLED-SN



SH-VICLED-MB



FINGERPRINT
RESISTANT
MATT BLACK



FINGERPRINT
RESISTANT
MATT BLACK




SH-VICLED-MB



SH-VICLED-MB

victoria LED

- SH-VICLED-AB ■ ▲
- SH-VICLED-SN ■
- SH-VICLED-MB ■



CLASS 1



SWITCH

Key Features

Matt black / Satin nickel /

Antique brass

Steel / Aluminium

3000K

1W CREE XPE Power LED


90 lumens

90° pivot, 350° rotation

RRP - £86.00

victoria LED recessed

- SH-VICLED-MB ■

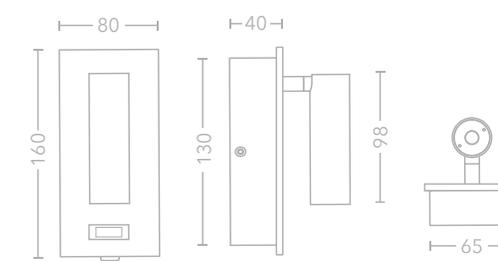

CLASS 1



SWITCH



NON-FINGER
PRINTING

Key Features

Matt black

Steel / Aluminium

3000K

1W CREE Power LED

90 lumens

90° pivot, 350° rotation

RRP - £122.00



LED-PROJ1W-W



LED-PROJ1W-B




LED-PROJ1W-B



Driver supplied separately, see pg. 220

mini projector

- LED-PROJ1W-B ■
 - LED-PROJ1W-W □
- 90 lumens



Key Features

Matt black / Matt white

Aluminium

3000K

1W CREE XPE Power LED


360° rotation, 270° pivot

Dimmable when used with a dimmable driver

RRP - £36.00



WL-SLO2-W

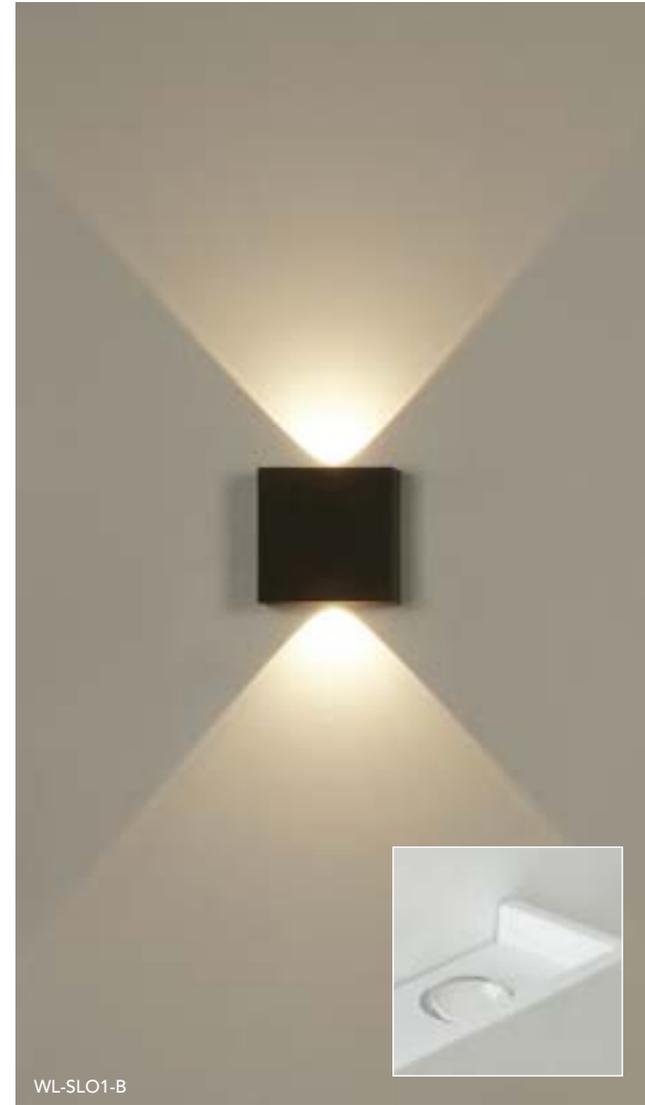

WL-SLO1-B



WL-SLO1-B




WL-SLO1-W

WALL

sloane 2

- WL-SLO2-B ■
- 500 lumens
- WL-SLO2-W □
- 525 lumens



WL-SLO2-B



CLASS 1 DIMMABLE


Key Features

- Sand black / Sand white
- Aluminium
- 3000K
- 6W Power LED
- See pg. 111 to view collection

RRP - £70.00

sloane 1

- WL-SLO1-B ■
- 260 lumens
- WL-SLO1-W □
- 270 lumens



CLASS 1 DIMMABLE

Key Features

- Sand black / Sand white
- Aluminium
- 3000K
- 4W Power LED
- See pg. 111 to view collection

RRP - £52.00



WL-SHO20-B

WL-SHO20-W


shoreditch

WL-SHO20-B ■ ▲

555 lumens

WL-SHO20-W □ ▲

1040 lumens



WL-SHO20-B



CLASS 1 DIMMABLE

Key Features

Sand black / Sand white

Aluminium

3000K

17W SMD LED

Can be fitted vertically or

horizontally

See pg. 111 to view collection

RRP - £76.00



WL-SOU24-W



WL-SOU24-B

WL-SOU24-W



WL-SOU24-B


southwark

WL-SOU24-B ■

350 lumens

WL-SOU24-W □

720 lumens

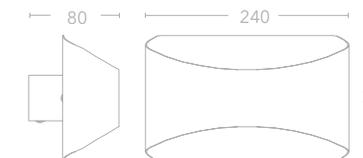

CLASS 1 DIMMABLE

Key Features

Sand black / Sand white


Aluminium

3000K

12W SMD LED

See pg. 111 to view collection

RRP - £63.00

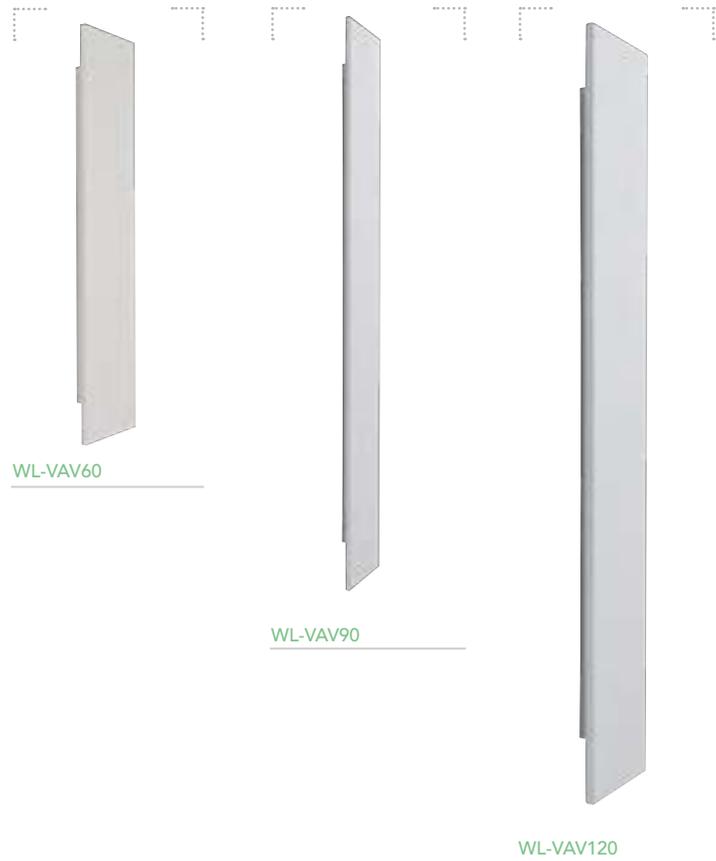

vavin 60

WL-VAV60

16W SMD LED

600 lumens

RRP - £153.00

vavin 90

WL-VAV90

20W SMD LED

850 lumens

RRP - £189.00


vavin 120

WL-VAV120

35W SMD LED

1250 lumens

RRP - £225.00

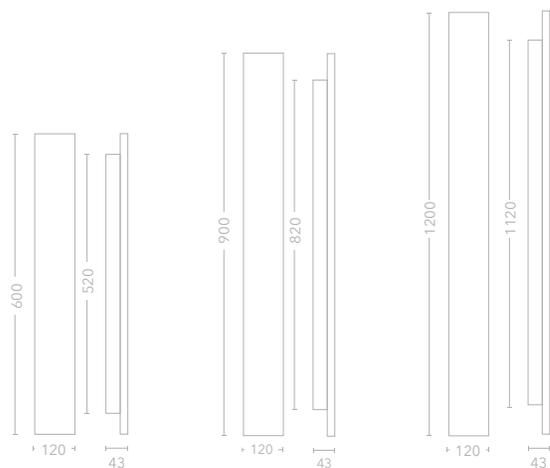

CLASS 2



DIMMABLE

Key Features

Sand white

Aluminium

3000K

Can be fitted vertically or horizontally






WL-LB10



WL-LB20

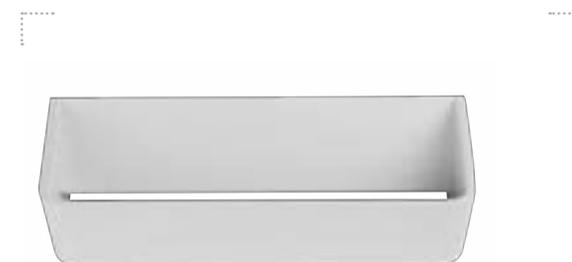

WL-LB38



WL-LB38



WL-LB20


london bridge

WL-LB10 <input type="checkbox"/>	WL-LB20 <input type="checkbox"/>	WL-LB38 <input type="checkbox"/>
7W POWER LED	7W SMD LED	13W SMD LED
450 lumens	600 lumens	1050 lumens

RRP - £48.00

RRP - £64.00

RRP - £80.00

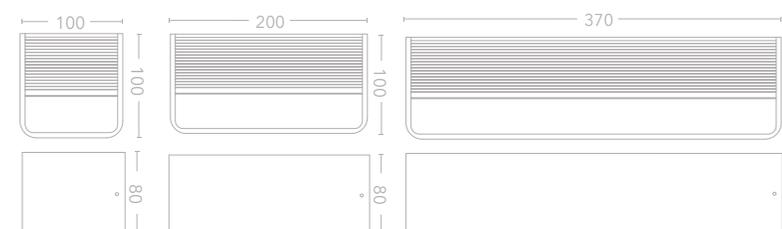

CLASS 1

Key Features

Sand white


3000K

Can be fitted vertically or horizontally



halkin

- WL-HALKB ■ 230 lumens
- WL-HALK □ 450 lumens

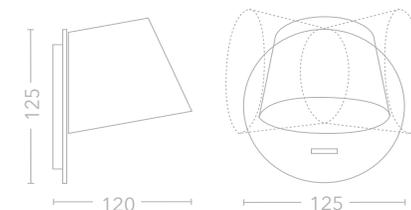

- CLASS 1
- SWITCH

Key Features

- Sand black / Sand white
- Aluminium
- 3000K
- 7W SMD LED
- 350° Rotation

RRP - £72.20



SH-WBPIM-CP & SH-DR15-C



SH-WBPIM-AB



SH-WBPIM-SN



SH-WBPIM-MB



SH-WBPIM2-SN & SH-DR15-C



SH-WBPIM2-CP



SH-WBPIM2-SN




SH-WBPIM2-MB

pimlico

- SH-WBPIM-AB ■ ▲
- SH-WBPIM-CP ■ ▲
- SH-WBPIM-SN ■ ▲
- SH-WBPIM-MB ■ ▲

Shades supplied separately, see pg.162-164

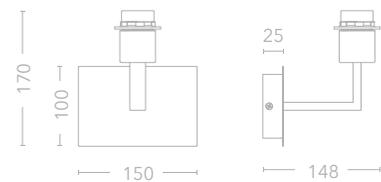

Key Features

Matt black / Satin nickel /
Antique brass / Polished chrome
Steel

E27 LED Max. 20W


RRP - £66.00

pimlico 2



- SH-WBPIM2-AB ■
- SH-WBPIM2-CP ■
- SH-WBPIM2-SN ■
- SH-WBPIM2-MB ■

Shades supplied separately, see pg.162-164

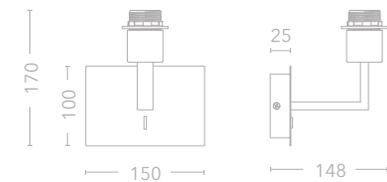

Key Features

Matt black / Satin nickel /
Antique brass / Polished chrome
Steel

E27 LED Max. 20W

Switch on the front of the product

RRP - £66.00




SH-WBPIMR-CP



SH-WBPIMR-SN



SH-WBPIMR-MB

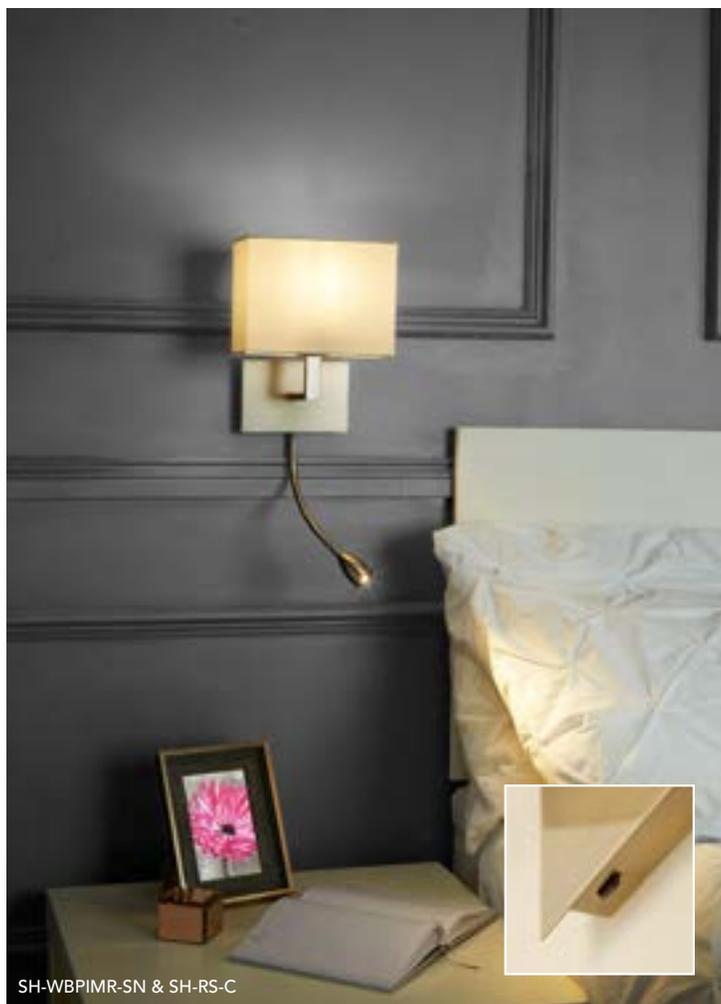

SH-WBPIMR-SN & SH-RS-C



SH-WBPIM2R-CP



SH-WBPIM2R-SN



SH-WBPIM2R-MB




SH-WBPIM2R-CP & SH-SQO-C

pimlico reader

- SH-WBPIMR-AB ■ ▲
- SH-WBPIMR-CP ■ ▲
- SH-WBPIMR-SN ■ ▲
- SH-WBPIMR-MB ■ ▲

Shades supplied separately, see pg.162-164

RRP - £93.00

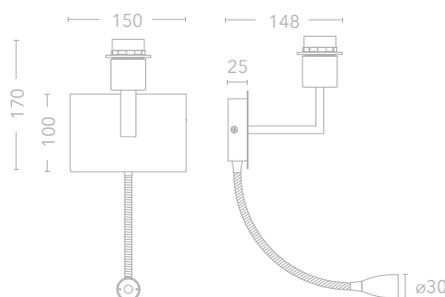

CLASS 1 SWITCH

Key Features

Matt black / Satin nickel /
Antique brass / Polished chrome
Steel

E27 LED Max. 20W

Reading Arm

3000K
1W CREE XPE Power LED
90 lumens
Replaceable LED 'MOD1W'


pimlico 2 reader

New

- SH-WBPIM2R-AB ■
- SH-WBPIM2R-CP ■
- SH-WBPIM2R-SN ■
- SH-WBPIM2R-MB ■

Shades supplied separately, see pg.162-164

RRP - £123.00

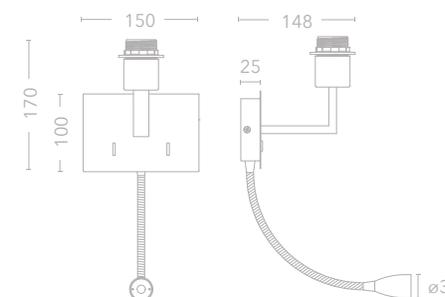

CLASS 1 SWITCH

Key Features

Matt black / Satin nickel /
Antique brass / Polished chrome
Steel

E27 LED Max. 20W

Switches on the front of product

Reading Arm

3000K
1W CREE XPE Power LED
90 lumens
Replaceable LED 'MOD1W'



SH-WBVIC-AB



SH-WBVIC-MB



SH-WBVIC-SN



SH-WBVIC-AB & SH-SQO-C



Shades supplied separately, see pg.162-164



SH-WBVICR-AB



SH-WBVICR-MB



SH-WBVICR-MB



SH-WBVICR-SN & SH-DR15-C




Shades supplied separately, see pg.162-164

victoria

- SH-WBVIC-AB ■
- SH-WBVIC-SN ■
- SH-WBVIC-MB ■

RRP - £72.00




Key Features

- Matt black / Satin nickel / Antique brass
- Steel
- E27 LED Max. 20W

victoria reader

- SH-WBVICR-AB ■
- SH-WBVICR-SN ■
- SH-WBVICR-MB ■

RRP - £124.20



Key Features

- Matt black / Satin nickel / Antique brass
- E27 LED Max. 20W

Reading Arm

- 3000K
- 1W CREE Power LED / 90 lumens
- E27 LED Max. 20W
- 90° pivot, 350° rotation
- Replaceable LED 'MOD1W'



Shades supplied separately, see pg.162-164

fenchurch


SH-WBFEN-SN ■

RRP - £81.20




Key Features

- Satin nickel
- Steel
- E27 LED Max. 20W
- Swing arm, 2 x 180°
- Removable pull cord

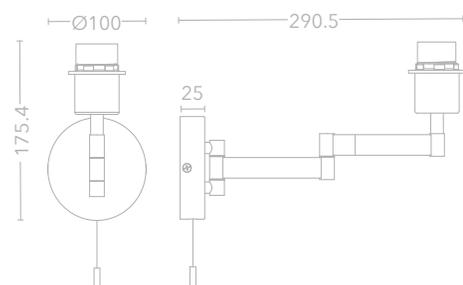

hotel wall lights



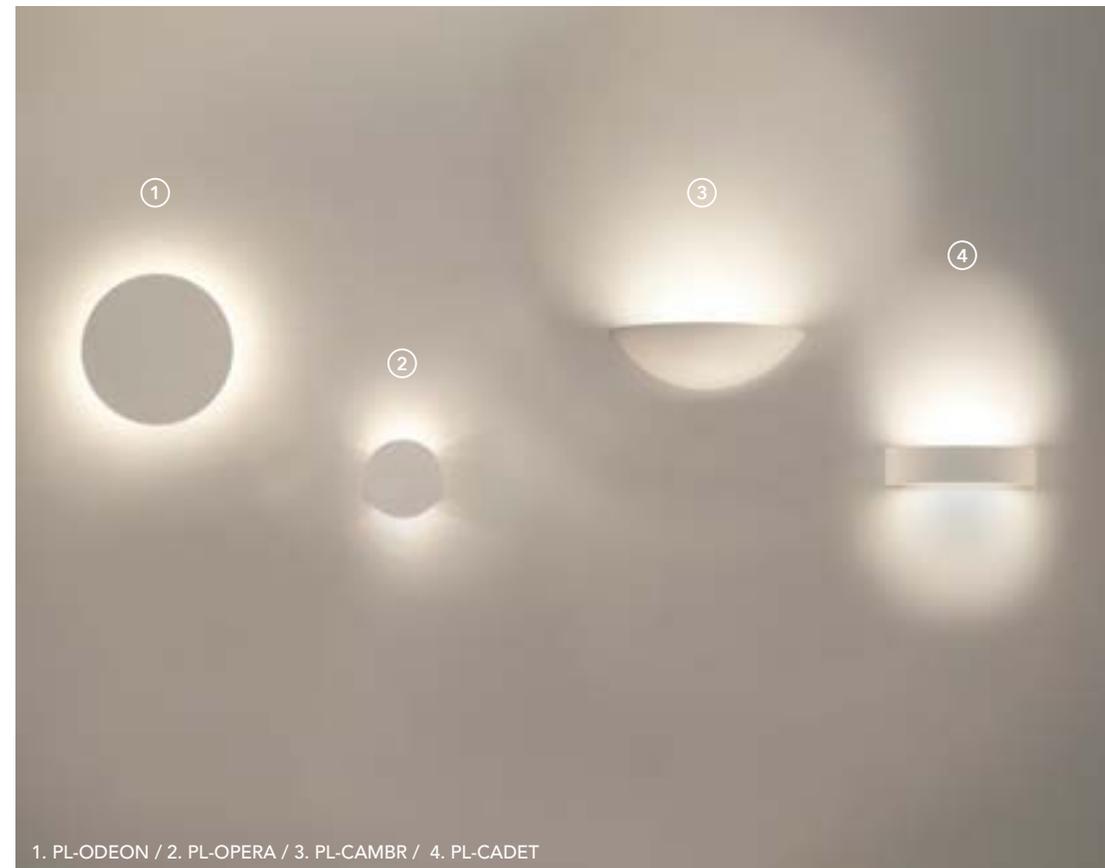

PAINTABLE

how to paint

All our plaster items are paintable. Follow these steps to achieve the best finish.

- ① seal the plaster with a PVA sealer (1 part PVA to 1 part water). allow to dry thoroughly
- ② paint with a soft brush. allow to dry
- ③ lightly sand
- ④ apply a second coat of paint with a soft brush

P this symbol represents a white plaster finish



PL-CONCO



PL-CONCO




PL-CONCO



PL-CONCS


concorde round

PL-CONCO 



concorde square

PL-CONCS 



Key Features

- White plaster
- 2 x Max. 10W GU10 LED
- Paintable with a good quality emulsion paint

RRP - £69.00




PL-EUROR

europe round

PL-EUROR  

450 lumens



PL-EUROR



Key Features

- White plaster
- 3000K
- 6W CREE COB LED
- Paintable with a good quality emulsion paint

RRP - £80.00



PL-MIRAB



PL-MIRAB



PL-MONCE




PL-MONCE

mirabeau

PL-MIRAB

470 lumens

RRP - £76.00




monceau

PL-MONCE

470 lumens

RRP - £82.00



CLASS 1



PAINTABLE

Key Features

White plaster

3000K

6W CREE COB LED

Paintable with a good quality

emulsion paint



PL-AVRON



PL-AVRON



PL-AVRON

avron

PL-AVRON 
600 lumens



Key Features

- White plaster
- 3000K
- 10W SMD LED
- Paintable with a good quality emulsion paint

RRP - £88.00



PL-CADET




PL-CADET



PL-CADET

cadet

PL-CADET 
700 lumens




Key Features

- White plaster
- 3000K
- 9W SMD LED
- Paintable with a good quality emulsion paint

RRP - £88.00



PL-CAMBR

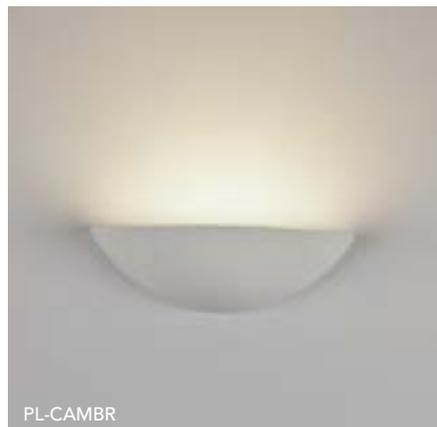

PL-CAMBR




PL-CAMBR

cambronne

PL-CAMBR  

350 lumens

RRP - £110.00

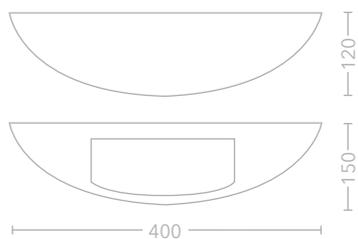

CLASS 2



PAINTABLE

Key Features

White plaster

3000K

9W SMD LED

Paintable with a good quality

emulsion paint



PL-OPERA



PL-ODEON



PL-OPERA


odeon

PL-ODEON 

11W SMD LED

610 lumens

RRP - £121.00




opera

PL-OPERA  

3W POWER LED

175 lumens

RRP - £74.00



CLASS 2



PAINTABLE

Key Features

White plaster

3000K

Paintable with a good quality
emulsion paint





table & floor



New



TA-LIB2-B



FS-LIB2-B



TA-LIB2-W


table & floor

libra 2 table

New

- TA-LIB2-B
- TA-LIB2-W

RRP - £94.00




libra 2 floor

New

- FS-LIB2-B
- FS-LIB2-W

RRP - £195.00

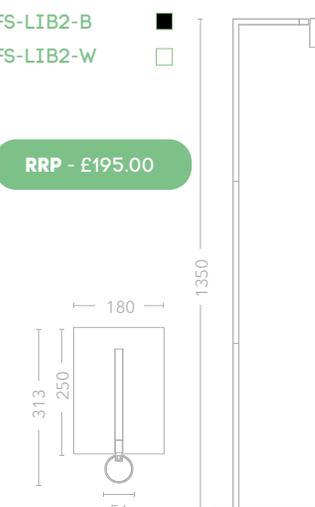

Key Features

Sand black / Sand white

Die cast construction

GU10 max. 10W LED only

30° beam angle

For European plug use code:

EUTA-LIB2-**

EUFS-LIB2-**



TA-OLY-AB-USB & SH-DR30-C



TA-OLY-SN-USB



FS-OLY-SN & SH-DR40-M



Shades supplied separately, see pg.162-164



TA-OLY-AB


FS-OLY-SN

olympia table USB

- TA-OLY-AB-USB ■ ▲
- TA-OLY-SN-USB ■

With USB charging port

RRP - £65.00

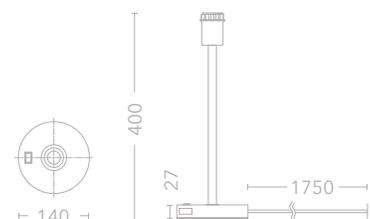


Key Features

- Antique brass / Satin nickel
- E27 max. 20W / LED only
- Switch on base
- For European plug use code: EUTA-OLY-**
- EUFS-OLY-**

olympia table

- TA-OLY-AB ■ ▲
 - TA-OLY-SN ■
- Switch on base


RRP - £50.00



olympia floor

- FS-OLY-AB ■ ▲
 - FS-OLY-SN ■
- In-line switch

RRP - £100.00




Key Features

- Antique brass / Satin nickel
- E27 max. 20W / LED only
- Floor lamp has in-line switch on cable
- Table lamp has switch on base
- For European plug use code: EUTA-OLY-**
- EUFS-OLY-**



TA-KEN-SN

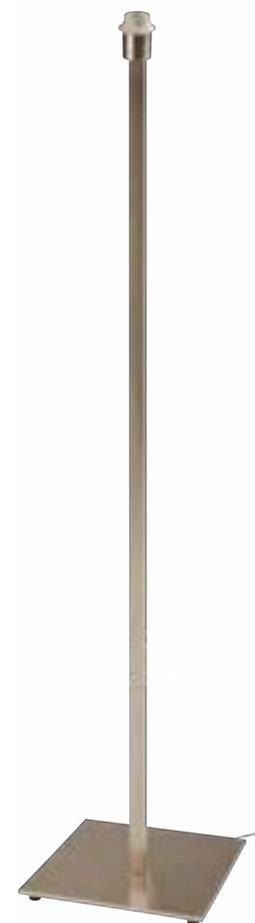

FS-KEN-SN



FS-KEN-SN

TA-KEN-SN




Shades supplied separately, see pg.162-164

kensington table

TA-KEN-SN


RRP - £73.00



kensington floor

FS-KEN-SN

RRP - £140.00



CLASS 2



SWITCH


Key Features

- Satin nickel finish
- E27 max. 20W
- LED only
- Inline switch on cable
- For European plug use code: EUTA-KEN-**
- EUFS-KEN-**



Shades

shades



Colour		Cone	Small Rectangle	Large Rectangle	Open Square	Drum 15	Drum 30	Drum 40
	Coconut	SH-CO-C	SH-RS-C	SH-RL-C	SH-SOO-C	SH-DR15-C	SH-DR30-C	SH-DR40-C
	Mushroom	SH-CO-M	SH-RS-M	SH-RL-M	SH-SOO-M	SH-DR15-M	SH-DR30-M	SH-DR40-M
	Grey Seal						SH-DR30-G	SH-DR40-G

Range	Page no.							
3lt Suspension	165							•
3lt Semi-flush	165							•
Pimlico 2	134-135	•	•	•	•	•		
Pimlico 2 Reader	136-137	•	•	•	•	•		
Victoria	138-139	•	•	•	•	•		
Fenchurch	140	•				•		
Kensington Table	158-159	•		•			•	
Kensington Floor	158-159			•				•
Olympia Table	156-157	•		•			•	
Olympia Floor	157							•

Key

- C - Coconut
- M - Mushroom
- G - Grey seal

All the shades in this collection are:
 White PVC lining
 To suit E27/E14/B22 shade ring
 For use with LED lamps only
 Available from stock in the UK
 Flame retardant

Shade material without light source



Shade material with 3000K light source




drum 15cm



SH-DR15-M

- SH-DR15-C
- SH-DR15-M




RRP - £20.00

drum 30cm



SH-DR30-G

- SH-DR30-C
- SH-DR30-M
- SH-DR30-G

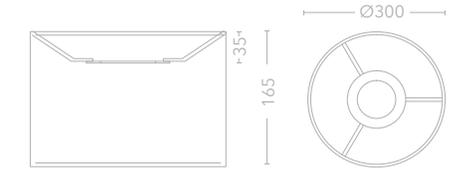


RRP - £42.00

drum 40cm



SH-DR40-G

- SH-DR40-C
- SH-DR40-M
- SH-DR40-G

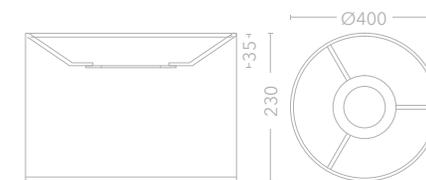

RRP - £66.80

diffuser



SH-DIF40

- SH-DIF40




RRP - £12.50

small rectangle



SH-RS-M

SH-RS-C SH-RS-M




RRP - £20.00

large rectangle



SH-RL-G

SH-RL-C SH-RL-M




RRP - £31.20

open square



SH-SQO-C

SH-SQO-C SH-SQO-M




RRP - £28.00

cone



SH-CO-M

SH-CO-C SH-CO-M

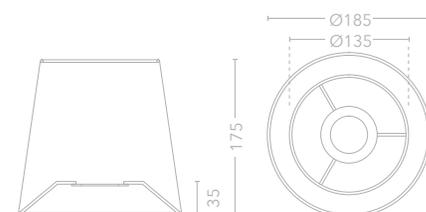

RRP - £25.00



SH-SF3-SN

SH-P3-SN

E27 3 light semi flush


SH-SF3-SN

RRP - £66.00

E27 3 light suspension

SH-P3-SN

RRP - £68.00

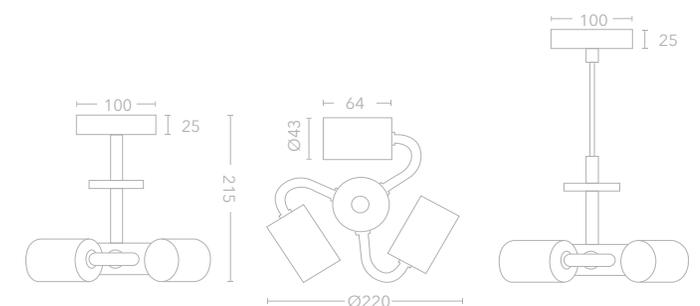


Key Features

- E27 20W Max
- 1.8m Clear cable
- LED only / 220-240V
- IP20
- Height adjustable

Suitable for:
Drum 30 & Drum 40 shades. Shades available in colours:
Grey seal / Coconut / Mushroom



Any outdoor product with this symbol is warranted for installation a minimum of 1km away from the coast

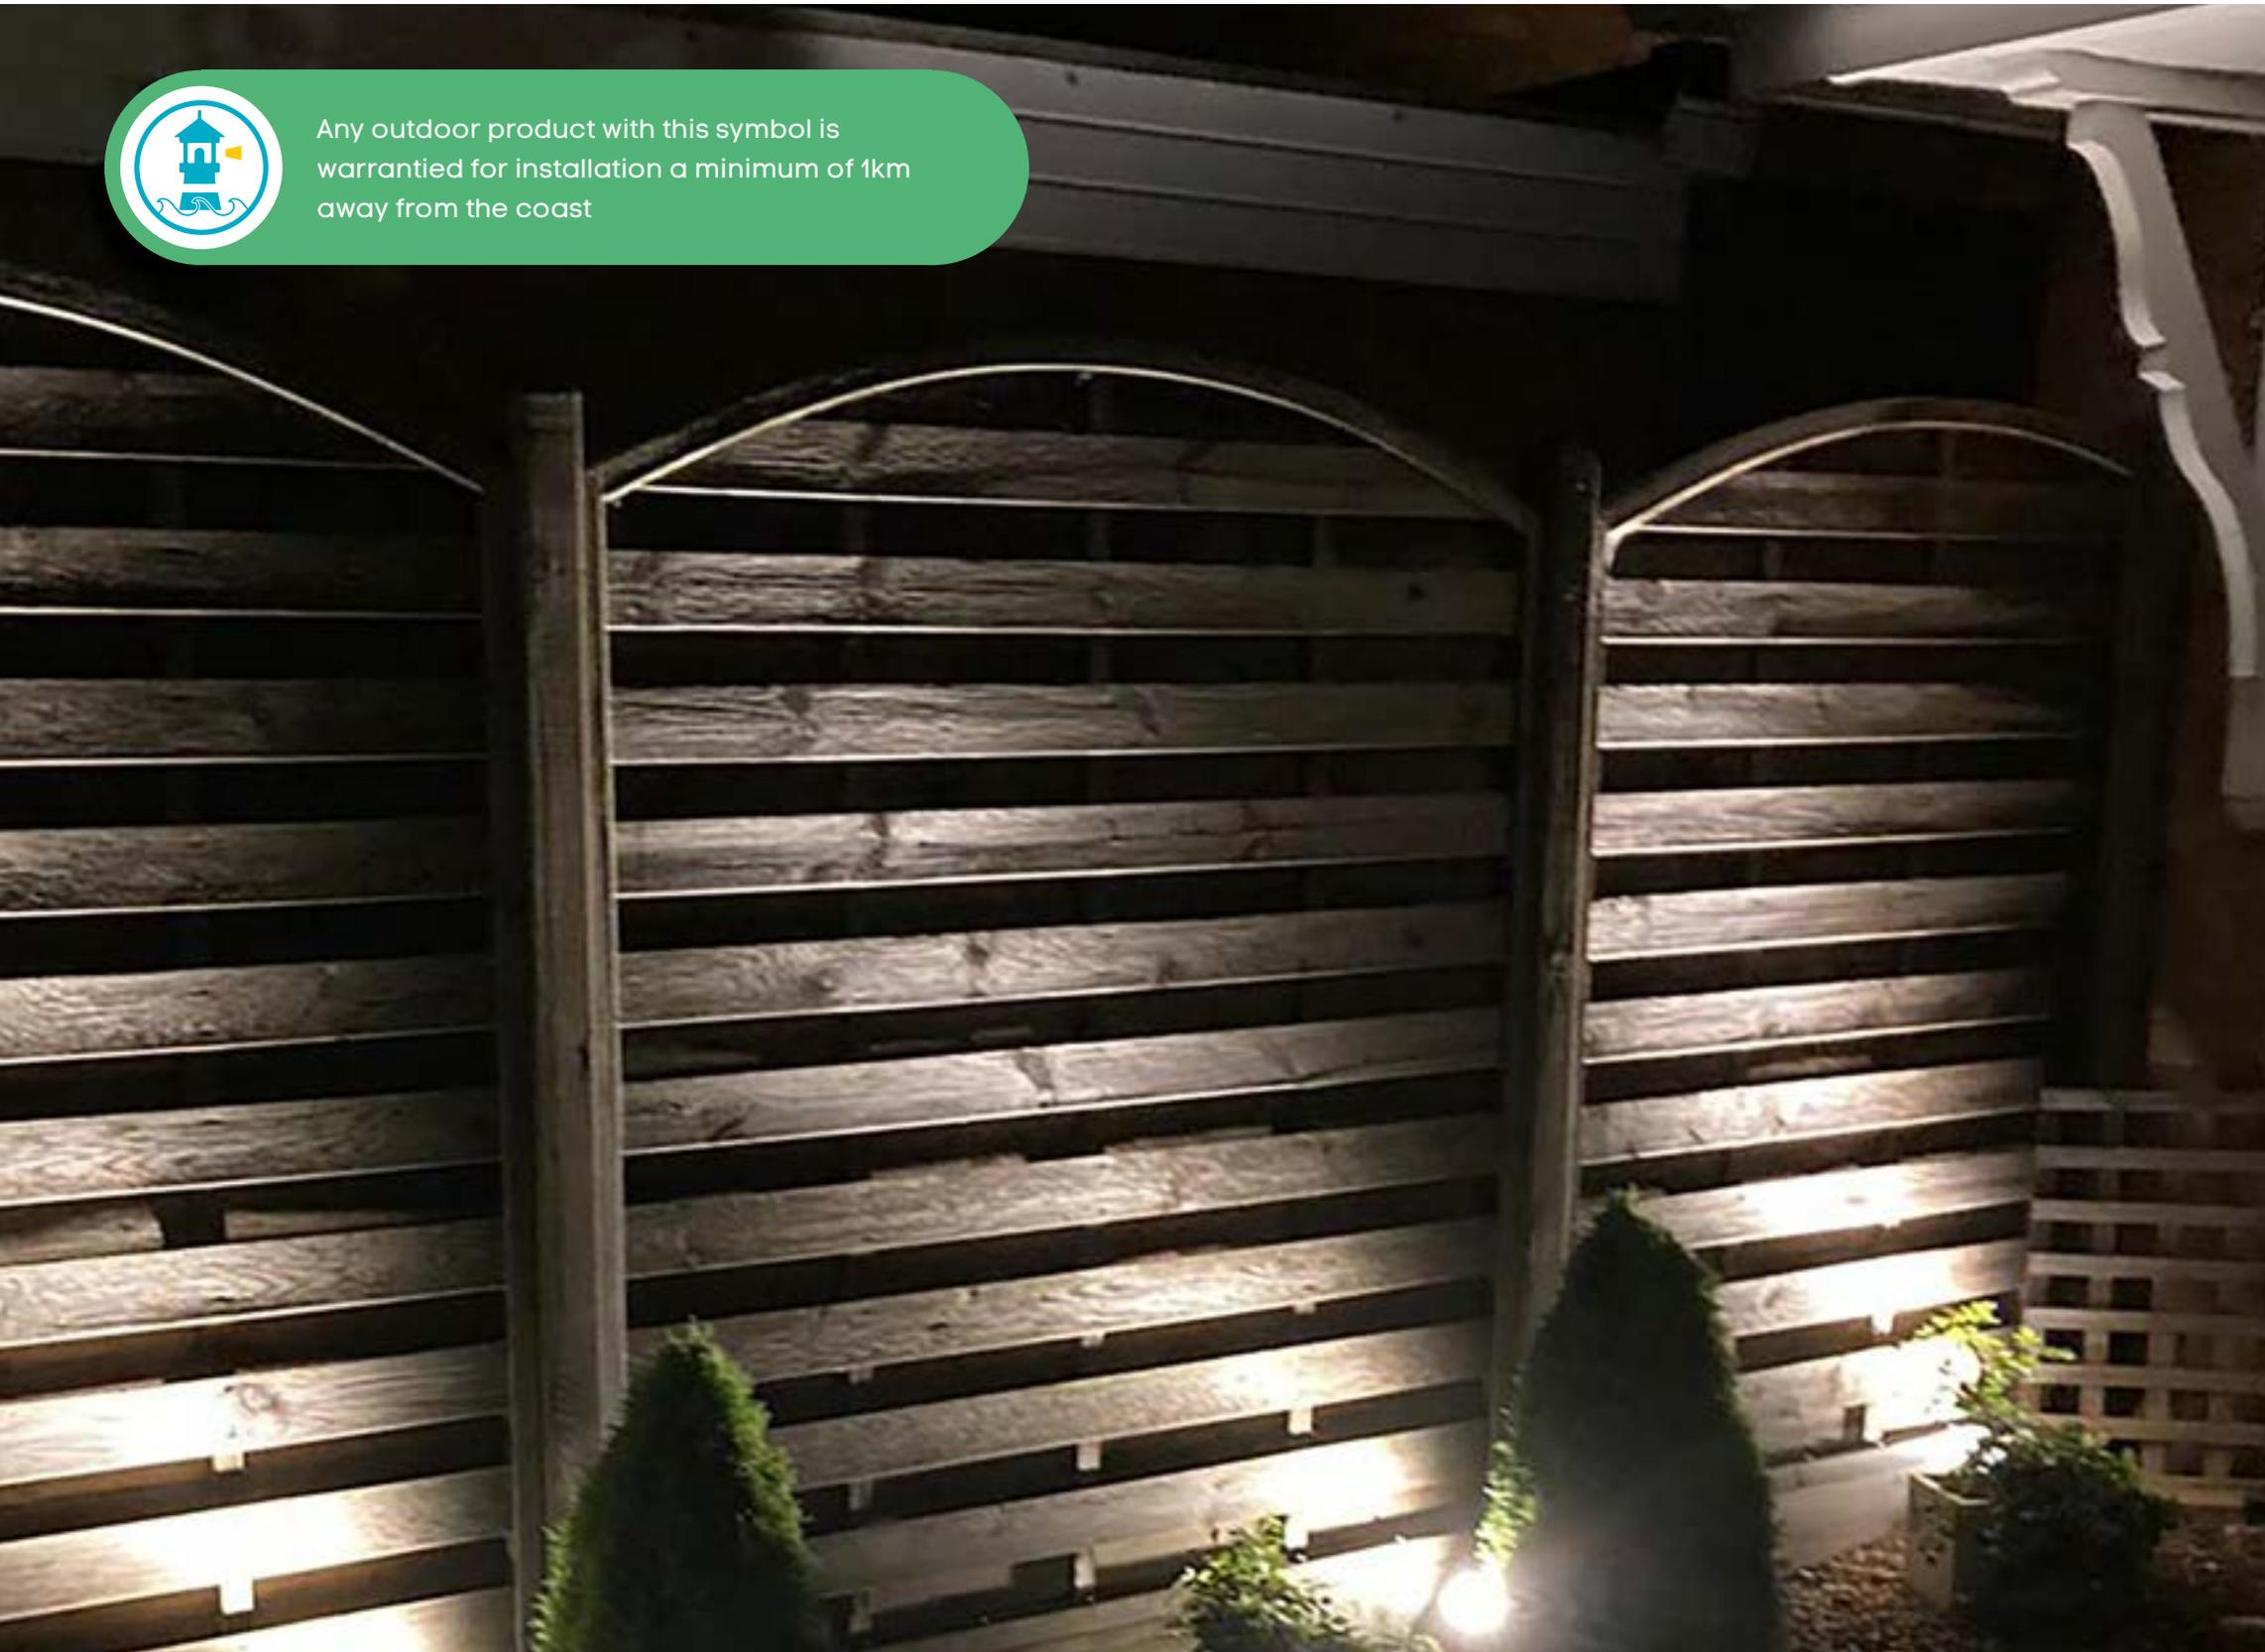

outdoor



IPR-EUSSS



IPR-EUSSS



IPR-HOODSS




IPR-HOODSS

euston 230V

IPR-EUSSS

420 lumens




RRP - £109.00

hood 230V

IPR-HOODSS

285 lumens




RRP - £110.00



Key Features

- Satin stainless steel Grade 316 cover / Passivated aluminium body
- 3000K
- 6W CREE COB LED
- Integral driver
- Includes installation tube
- Installation tube must be used for drive over applications

outdoor recessed

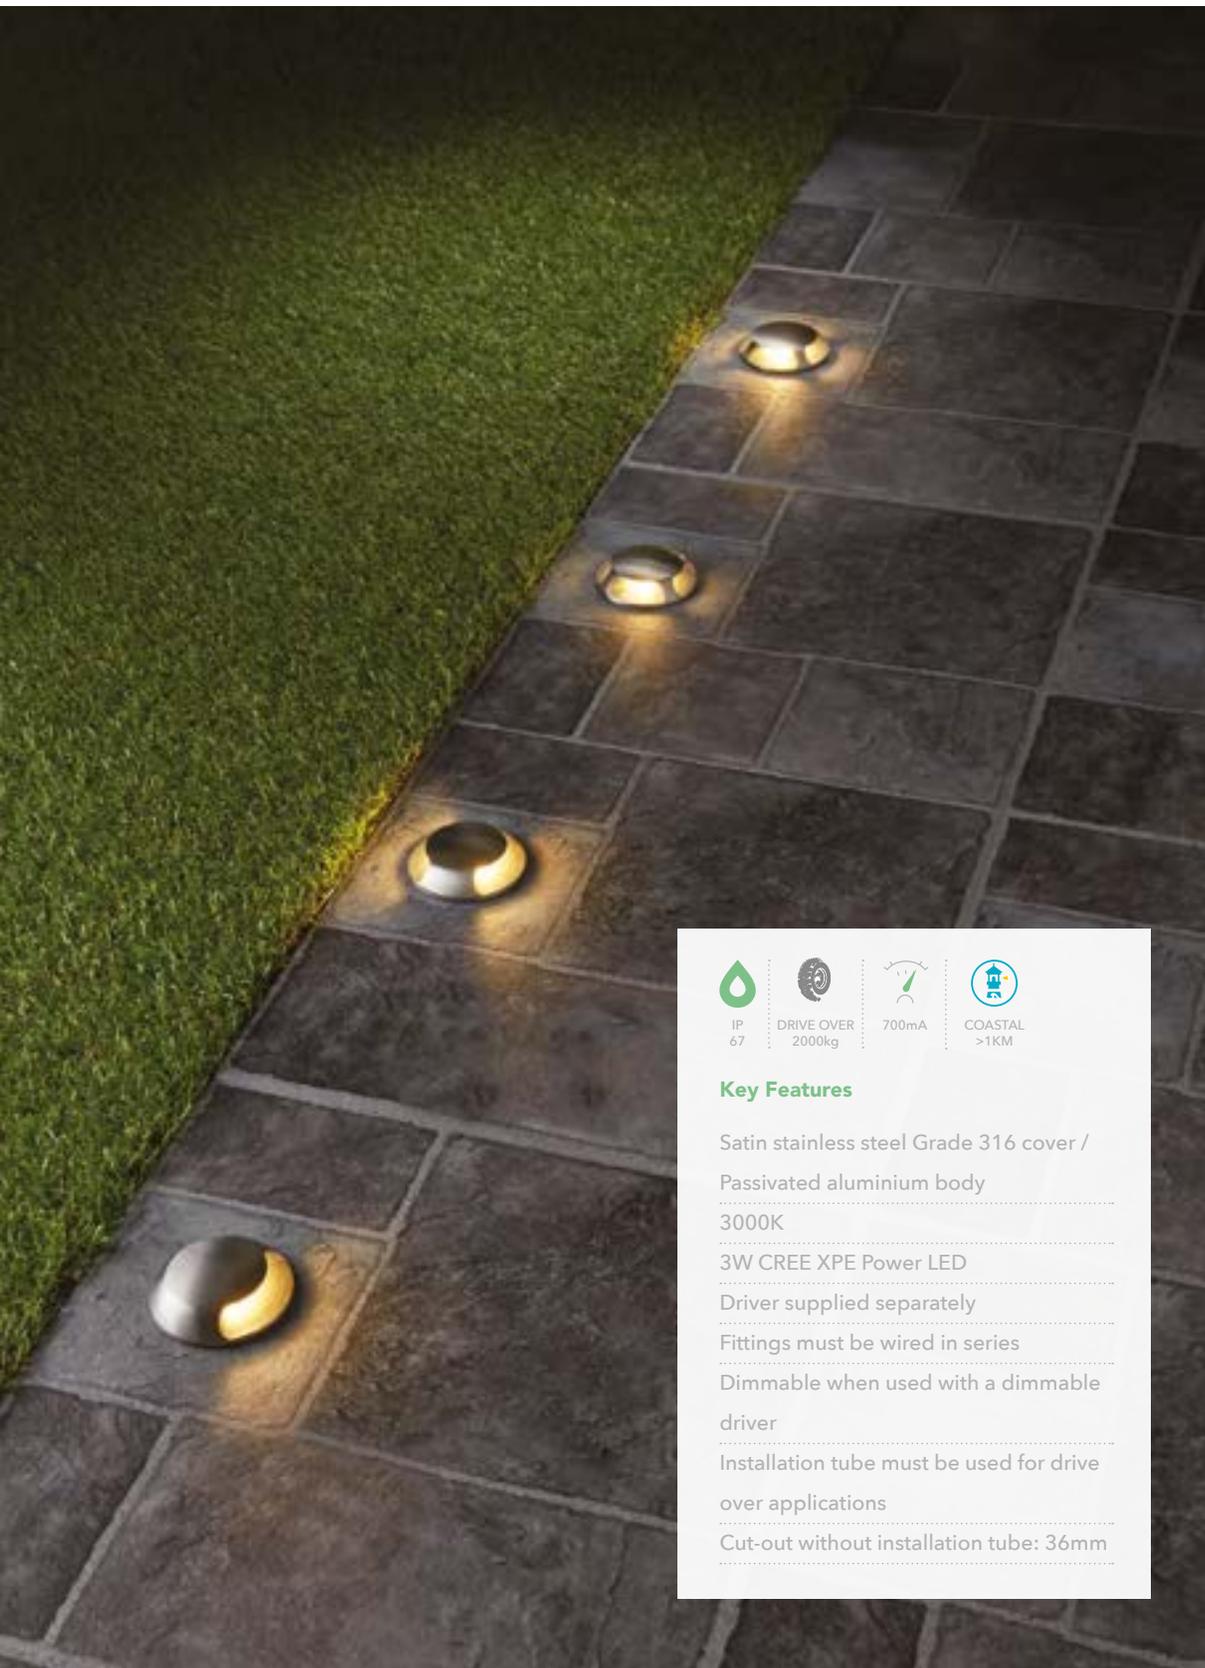

IP
67

DRIVE OVER
2000kg

700mA

COASTAL
>1KM


Key Features

- Satin stainless steel Grade 316 cover /
- Passivated aluminium body
- 3000K
- 3W CREE XPE Power LED
- Driver supplied separately
- Fittings must be wired in series
- Dimmable when used with a dimmable driver
- Installation tube must be used for drive over applications
- Cut-out without installation tube: 36mm

outdoor recessed



- | | | | | |
|-------------------------|-------------------------|-------------------------|-------------------------|---|
| 4 way plot light | 3 way plot light | 2 way plot light | 1 way plot light | |
| IPR-PLOT4SS | IPR-PLOT3SS | IPR-PLOT2SS | IPR-PLOT1SS | Average 90 lumens |
| 4 x 70° Beam | 3 x 70° Beam | 2 x 110° Beam | 1 x 110° Beam |
CUT OUT with installation tube 39mm |

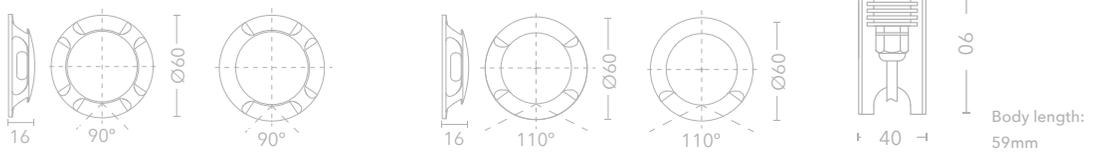

RRP - £72.00



IPR-PICRSS



IPR-PICRSS



IPR-PICRSS



Driver supplied separately, see pg. 220



IPR-PADRSS15 / IPR-PADRSS30



IPR-PADRSS15




Driver supplied separately, see pg. 220



IPR-PADSSS15



IPR-PADSSS15 / IPR-PADSSS30

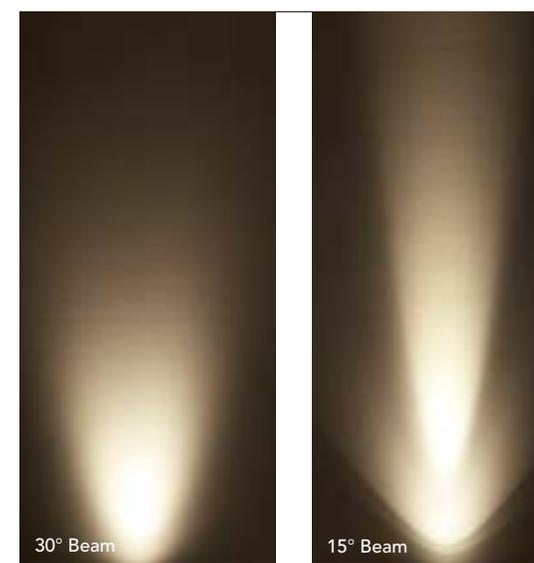


30° Beam

15° Beam

piccadilly IP67



IPR-PICRSS
220 lumens
20° beam



Key Features


- Satin stainless steel Grade 316 cover / Passivated aluminium body
- 3000K
- 3W CREE XPE Power LED
- Driver supplied separately
- Fittings must be wired in series
- Dimmable when used with a dimmable driver
- Includes installation tube

RRP - £47.00

paddington round IP67



IPR-PADRSS15
15° beam
IPR-PADRSS30
30° beam




RRP - £36.00

paddington square IP67



IPR-PADSSS15 ▲
15° beam
IPR-PADSSS30 ▲
30° beam



RRP - £36.00



Key Features

- Satin stainless steel Grade 316 cover / Passivated aluminium body
- 3000K / 90 lumens
- 1W CREE XPE Power LED
- Driver supplied separately
- Fittings must be wired in series
- Dimmable when used with a dimmable driver
- Includes installation tube

New



OD-FARR & OD-FPOLE



OD-FARR700



OD-FARP & 2 x OD-FPOLE




OD-FARP

farrington 8W 230V

OD-FARR ■
230V / Class I
CREE COB
550 Lumens

RRP - £80.00



farrington 8W 700mA

OD-FARR700 ■ ▲
700mA / Class III
550 Lumens

RRP - £68.00

OD-FPOLE ■
300mm extension pole,
use 2 for a 600mm extension

RRP - £20.30



Key Features

- Passivated black
- Aluminium
- 3000K
- 8W CREE COB LED
- Pre fitted with 24° reflector
- 10° reflector supplied in the box
- Compatible with OD-FPOLE


farrington plus 230V

New

OD-FARP ■
1400 lumens

RRP - £110.00

OD-FPOLE ■
300mm extension pole,
use 2 for a 600mm extension




Key Features

- Passivated black
- Aluminium
- 3000K
- 14W CREE COB LED
- 25° beam angle
- Compatible with OD-FPOLE



OD-FARP

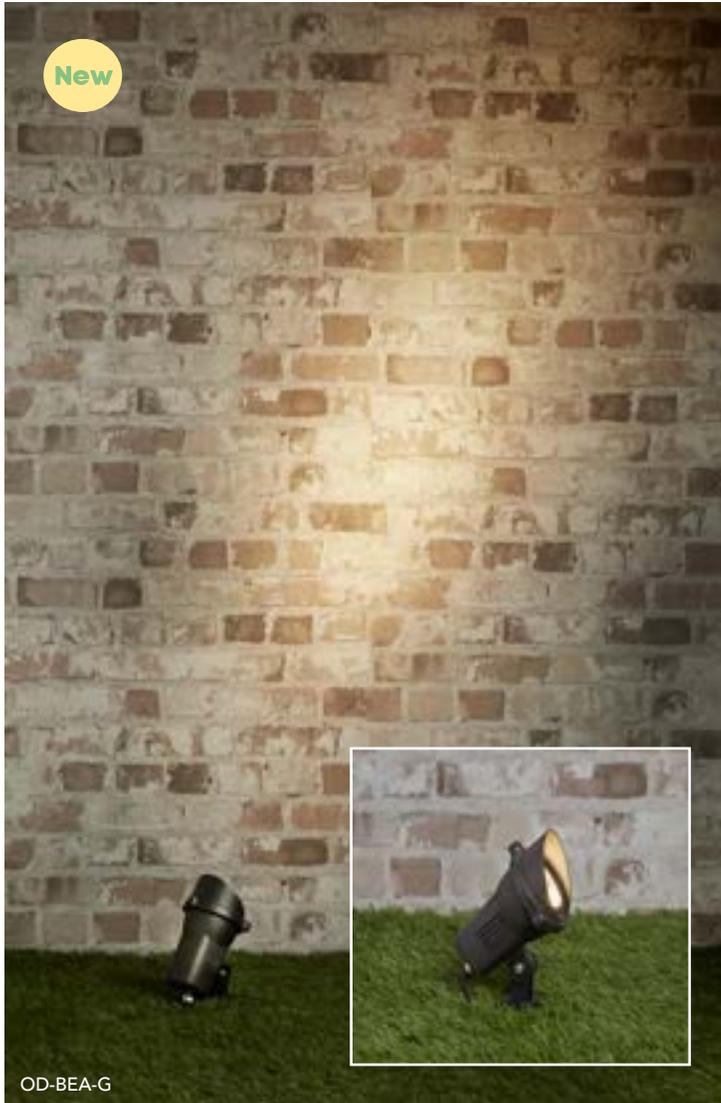

OD-BEA-G




OD-BEA-G

beaumont

New

OD-BEA-G
520 lumens



- CLASS 1
- IP 65
- 230 VOLTS
- COASTAL >1KM

Key Features

- Graphite
- Aluminium
- 3000K
- 5W Osram Power LED
- Warrantied for installation up to 1km from the coast

RRP - £48.00



OD-SAN80-G




OD-SAN80-G

outdoor

sanderson bollard

OD-SAN80-G
700 lumens



- CLASS 1
- IP 54
- 230 VOLTS
- COASTAL >1KM

Key Features

- Graphite
- Aluminium
- 3000K
- 9W Osram SMD LED
- Warrantied for installation up to 1km from the coast

RRP - £189.50



OD-GRO280-G




OD-GRO230-G

outdoor

grosvenor bollard 80cm


OD-GRO80-G ■
600 lumens



RRP - £164.00

grosvenor bollard 30cm

OD-GRO30-G ■
600 lumens



RRP - £113.00


-  CLASS 1
-  IP 54
-  230 VOLTS
-  COASTAL >1KM

Key Features

- Graphite
- Aluminium
- 3000K
- 8W CREE COB LED
- Warrantied for installation up to 1km from the coast

grosvenor II bollard 80cm

OD-GRO280-G ■
660 lumens



RRP - £181.00

grosvenor II bollard 30cm

OD-GRO230-G ■
660 lumens



RRP - £122.00

-  CLASS 1
-  IP 65
-  230 VOLTS
-  COASTAL >1KM

Key Features

- Graphite
- Aluminium
- 3000K
- 13W CREE COB LED
- Warrantied for installation up to 1km from the coast



OD-CON-G



OD-CONP-G




OD-CON-G



OD-CONP-G

connaught

OD-CON-G ■
13W CREE COB LED
1000 Lumens




RRP - £120.00

connaught plus

New

OD-CONP-G ■
28W CREE COB LED
2150 Lumens



RRP - £150.00

-  CLASS 1
-  IP 65
-  230 VOLTS
-  COASTAL >1KM

Key Features

- Graphite
- Aluminium
- 3000K
- Warrantied for installation up to 1km from the coast





OD-SAV-G




OD-LAN-G



OD-SAV-G

savoy

OD-SAV-G
700 lumens




Key Features

Graphite
Aluminium
3000K
13W CREE Power LED
Warrantied for installation up to
1km from the coast

RRP - £81.00

lanesborough

OD-LAN-G
1150 Lumens



OD-LAN-G




Key Features

Graphite
Aluminium
3000K
13W CREE COB LED
Warrantied for installation up to
1km from the coast

RRP - £94.00

New

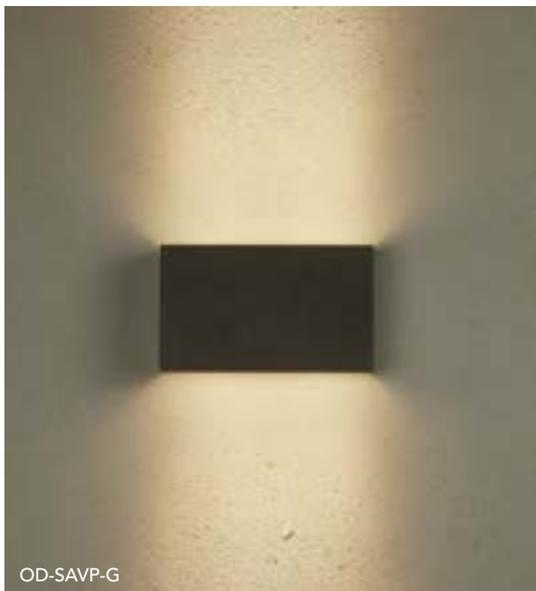

OD-SAVP-G



OD-SAVP-G





OD-SAVP-G

savoy plus

OD-SAVP-G
1850 lumens

Narrow beam reaches up
to 6m in each direction

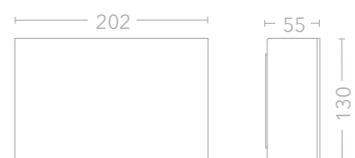

New



Key Features

- Graphite
- Aluminium
- 3000K
- 18W Osram Power LED
- Warrantied for installation up to 1km from the coast

RRP - £98.00




OD-BER1-G



OD-BER1-G

berkeley

OD-BER1-G
900 lumens

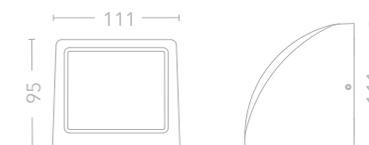

Key Features

- Graphite / Aluminium
- 3000K
- 8W CREE COB LED
- Warrantied for installation up to 1km from the coast
- Only to be fitted in the downward position

RRP - £72.00



Adjustable beam angles



OD-STR-G



OD-MAY-G

outdoor




OD-STR-G



OD-MAY-G

strand adjustable


OD-STR-G
13W CREE LED
500 lumens



RRP - £112.50

mayfair adjustable

OD-MAY-G
6W CREE LED
270 lumens



RRP - £67.00



Key Features

- Graphite
- Aluminium
- 3000K
- Warrantied for installation up to 1km from the coast
- Adjustable shutters top and bottom to change the beam angles independently



simplon IP65

See Pg. 206-207 for all information including product codes and technical drawings

pyrenees IP65



Key Features

- Aluminium body
- 1W CREE XPE LED
- Wall mounted
- 350mA items require a separate driver



OD-TRA-W

trafalgar GU10

New

- OD-TRA-B ■
- OD-TRA-W □



RRP - £26.00



Key Features

- Sand black / Sand white
- Aluminium / Glass
- GU10 max. 10W LED only



outdoor



OD-KOBL



OD-KOBL



OD-KOBM



OD-KYOM




OD-KYOM



OD-KYOS

kobe large


OD-KOBL ■
21W SMD LED
1300 lumens



RRP - £122.00

kobe medium

OD-KOBM ■
16W SMD LED
900 lumens



RRP - £86.00




Key Features

- Dark grey
- PC / ABS Material
- 3000K
- Corrosion resistant
- Suitable for use in coastal areas
- Wall or ceiling mounted

kyoto medium


OD-KYOM ■
21W SMD LED
1500 lumens



RRP - £65.00

kyoto small

OD-KYOS ■
17W SMD LED
1000 lumens



RRP - £50.00



Key Features

- Dark grey
- PC / ABS Material
- 3000K
- Corrosion resistant
- Suitable for use in coastal areas
- Wall or ceiling mounted



OD-CHIBA



OD-TOKYO



OD-TOKYO



OD-CHIBA




Interchangable covers



OD-TOKYO

chiba duo

OD-CHIBA ■
1050 lumens



RRP - £42.00




Key Features

- Dark grey
- PC / ABS Material
- 3000K
- 13W SMD LED
- Corrosion resistant
- Suitable for use in coastal areas
- Wall or ceiling mounted
- Supplied with both covers in the box

tokyo

OD-TOKYO ■
800 lumens



RRP - £62.00



Key Features

- Dark grey
- PC / ABS Material
- 3000K
- 13W SMD LED
- Corrosion resistant
- Suitable for use in coastal areas
- Wall or ceiling mounted



OD-YOK




OD-YOK



OD-YOK

yokohama

OD-YOK ■
320 lumens

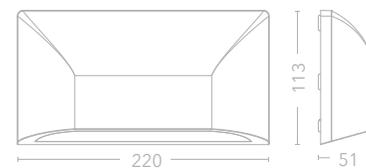

Key Features

- Dark grey
- PC / ABS Material
- 3000K
- 6W SMD LED
- Corrosion resistant
- Suitable for use in coastal areas
- Surface mounted

RRP - £39.50




OD-SAPS-GW




OD-SAPS-GW



OD-SAPS-GW

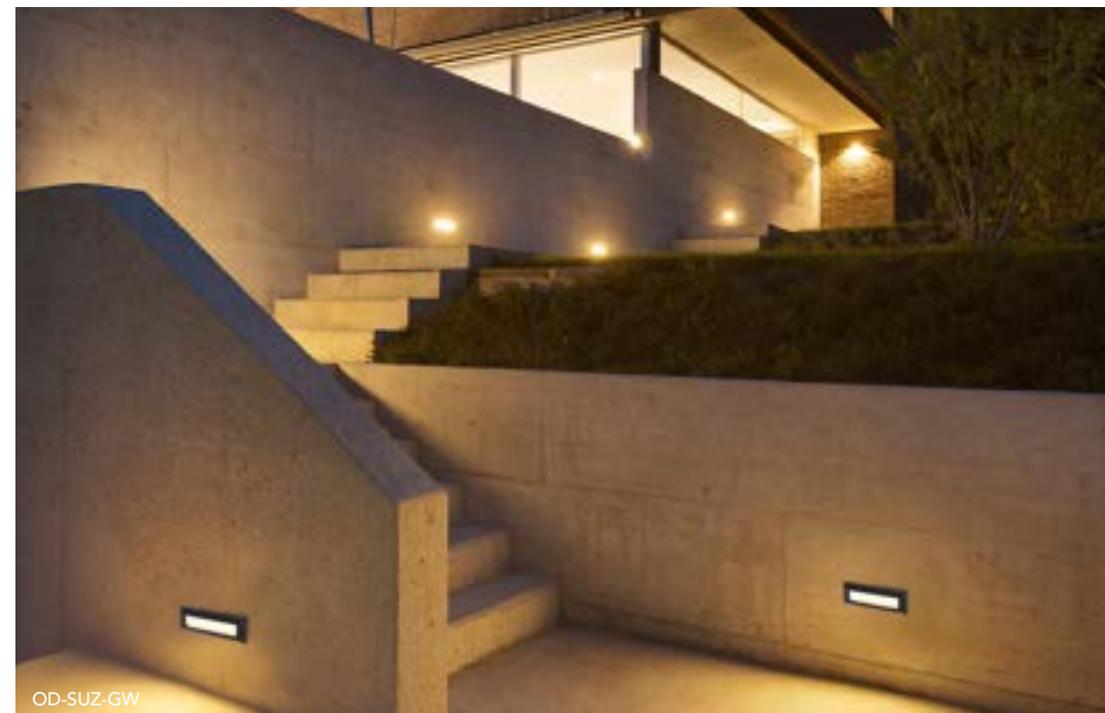

OD-SUZ-GW

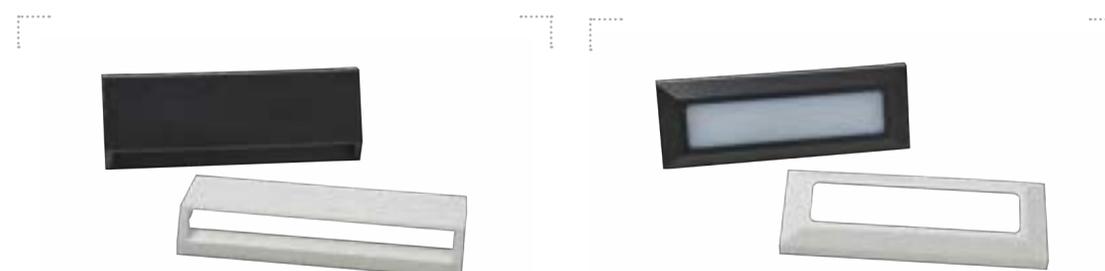


OD-SAPL-GW

OD-SUZ-GW

sapporo square

OD-SAPS-GW ■ / □
45 lumens



RRP - £24.50



Key Features

- Dark grey and white covers supplied in the box
- PC / ABS Material
- 3000K
- 1.1W SMD LED
- Corrosion resistant
- Suitable for use in coastal areas
- Surface mounted

sapporo long

OD-SAPL-GW ■ / □
3.5W SMD LED
265 lumens



RRP - £27.00

suzuka slot

OD-SUZ-GW ■ / □
3W SMD LED
310 lumens



RRP - £29.00




Key Features

- Dark grey and white covers supplied in the box
- PC / ABS Material
- 3000K
- Corrosion resistant
- Suitable for use in coastal areas
- Surface mounted



bathroom

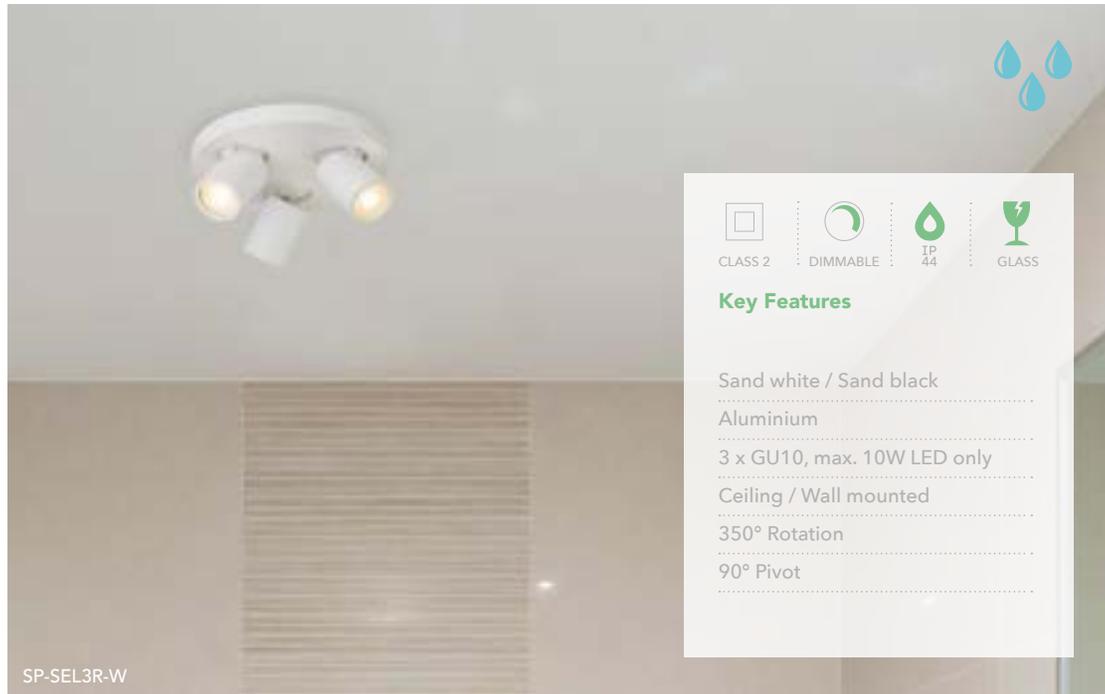

SP-SEL3R-W

CLASS 2
 DIMMABLE
 IP 44
 GLASS

Key Features

Sand white / Sand black

Aluminium

3 x GU10, max. 10W LED only

Ceiling / Wall mounted

350° Rotation

90° Pivot




SP-SEL3L-W

SP-SEL3L-B

selene 3 round
IP44


- SP-SEL3R-B
- SP-SEL3R-W

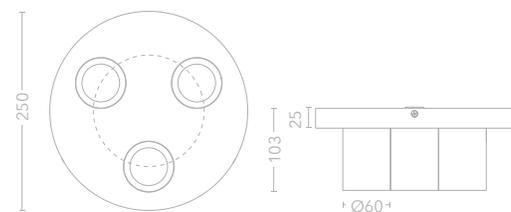

RRP - £142.00

selene 3 long
IP44

- SP-SEL3L-B
- SP-SEL3L-W

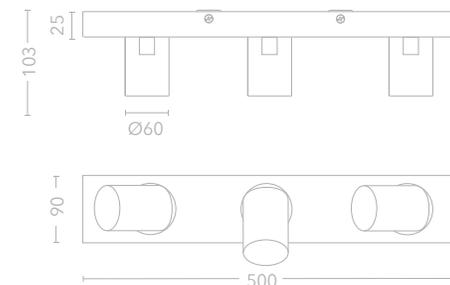

RRP - £150.50




OD-TRA-B



OD-TRA-B



OD-TRA-W

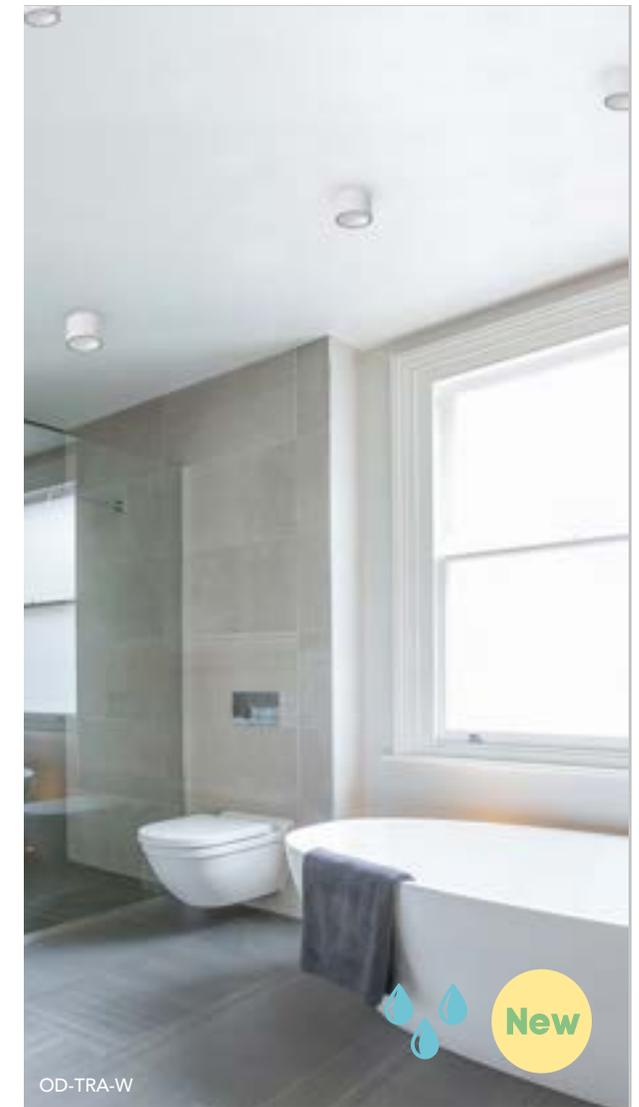


OD-TRA-W

trafalgar

New

- OD-TRA-B
- OD-TRA-W



RRP - £26.00

CLASS 1
 IP 65
 230 VOLTS

Key Features

- Sand black / Sand white
- Aluminium / Glass
- GU10 max. 10W LED only



FL-ADM40-W




FL-BAN35-B

FL-ADM40-W



FL-ADM40-W

FL-ADM30-W

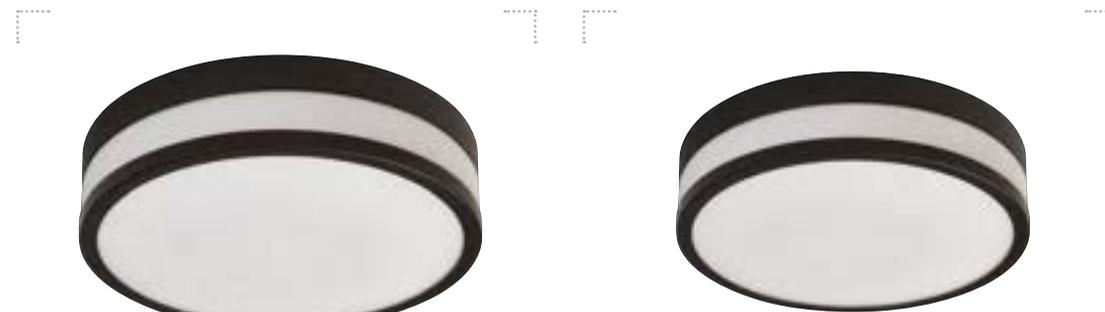


FL-BAN35-B

FL-BAN23-B

andaman 40cm IP44


FL-ADM40-W □
25W SMD LED
1200 lumens



RRP - £147.00

andaman 30cm IP44

FL-ADM30-W □
14W SMD LED
600 lumens



RRP - £253.00




Key Features

- Clear glass / Matt white inner glass
- Glass / Steel
- 3000K
- Ceiling or wall mounted

banda 35cm IP44


FL-BAN35-B ■
27W SMD LED
650 lumens



RRP - £115.00

banda 23cm IP44

FL-BAN23-B ■
14W SMD LED
350 lumens



RRP - £145.00



Key Features

- Matt white glass / Black
- Glass / Steel
- 3000K



CE-PER130



peri IP44

New

CE-PER130

1400 lumens at 3000K
1800 lumens at 4000K
1600 lumens at 5000K

RRP - £90.00



Key Features

- White
- Polycarbonate
- 3000K / 4000K / 5000K switchable
- CCT switch in body
- 17W SMD LED
- Rear or side cable entry
- Ceiling or wall mounted

verve 30 IP44

New

CE-VER30-B

CE-VER30-W

16W SMD LED
1450 lumens at 3000K
1750 lumens at 4000K
1650 lumens at 5700K

RRP - £105.00

verve 40 IP44

New

CE-VER40-B

CE-VER40-W

23W SMD LED
2100 lumens at 3000K
2300 lumens at 4000K
2100 lumens at 5700K

RRP - £170.00



Key Features

- Sand black / Sand white
- Aluminium / PC diffuser
- 3000K / 4000K / 5700K
- Switchable
- Switch on back of fitting
- Ceiling or wall mounted



IPR-WSLW

IPR-WSLB


Item no.	Finish	Power	CCT	Lumens	IP Rating	Dimmable	Replaceable LED module	Class
IPR-WSLB	Black	350mA	3000K	45	65	Yes*	MOD1WIP	III
IPR-WSLB-AC	Black	220 - 240V**	3000K	45	65	No	MOD1WIP230V	I
IPR-WSLB27	Black	350mA	2700K	45	65	Yes*	MOD1WIP-2700	III
IPR-WSLB27-AC	Black	220 - 240V**	2700K	45	65	No	MOD1WIP230V-2700	I
IPR-WSLW	White	350mA	3000K	95	65	Yes*	MOD1WIP	III
IPR-WSLW-AC	White	220 - 240V**	3000K	95	65	No	MOD1WIP230V	I
IPR-WSLW27	White	350mA	2700K	95	65	Yes*	MOD1WIP-2700	III
IPR-WSLW27-AC	White	220 - 240V**	2700K	95	65	No	MOD1WIP230V-2700	I

*Dimmable when used with a dimmable driver ** Integrated Driver

simplon IP65



CUT OUT
40x147mm

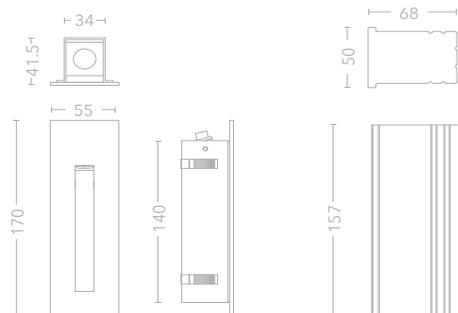

Key Features

Sand white / Sand black

Aluminium

1W CREE XPE Power LED

30° beam angle

Mounting box included for solid wall applications

See Price List
for RRP



IPR-WRW

IPR-WRB


Item no.	Finish	Power	CCT	Lumens	IP Rating	Dimmable	Replaceable LED module	Class
IPR-WRB	Black	350mA	3000K	50	65	Yes*	MOD1WIP	III
IPR-WRB-AC	Black	220 - 240V**	3000K	50	65	No	MOD1WIP230V	I
IPR-WRB27	Black	350mA	2700K	50	65	Yes*	MOD1WIP-2700	III
IPR-WRB27-AC	Black	220 - 240V**	2700K	50	65	No	MOD1WIP230V-2700	I
IPR-WRW	White	350mA	3000K	95	65	Yes*	MOD1WIP	III
IPR-WRW-AC	White	220 - 240V**	3000K	95	65	No	MOD1WIP230V	I
IPR-WRW27	White	350mA	2700K	95	65	Yes*	MOD1WIP-2700	III
IPR-WRW27-AC	White	220 - 240V**	2700K	95	65	No	MOD1WIP230V-2700	I

*Dimmable when used with a dimmable driver ** Integrated Driver

pyrenees IP65



CUT OUT
60mm

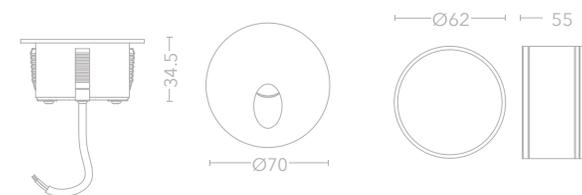

Key Features

Sand white / Sand black

Aluminium

1W CREE XPE Power LED

30° beam angle

Mounting sleeve included for solid wall applications

See Price List
for RRP



IPR-HOLSSAG



IPR-HOLSS



IPR-HOXSS



IPR-HOLSS




IPR-HOXCP

holborn IP65

IPR-HOLSS

1W CREE XPE Power LED
90 lumens / 120° beam angle




RRP - £41.00

hoxton IP65

IPR-HOXSS ▲ IPR-HOXCP

1W CREE XPE Power LED
90 lumens / 120° beam angle



RRP - £37.00



Key Features

- Polished chrome or satin stainless steel 316 / Aluminium body
- 3000K
- Very shallow profile
- Driver supplied separately
- Fittings must be wired in series



IPR-HOLSS


holborn anti glare IP65



IPR-HOLSSAG



IPR-HOLSSAG



RRP - £46.00



Key Features


- Satin stainless steel 316
- 1W CREE XPE / 3000K
- 25 lumens / Beam angle: 120°
- Very shallow profile
- Driver supplied separately
- Fittings must be wired in series

diana



DL-DIA-W

DL-DIA-W



RRP - £16.00



Key Features

- Sand white finish / Die cast body
- 1W Olsen LED / 3000K
- 95 lumens / Beam angle: 30°
- Driver supplied separately
- Fittings must be wired in series



IPR-PICRSS



IPR-PICRSS



IPR-PICRSS



Driver supplied separately, see pg. 220



IPR-PADRSS15 / IPR-PADRSS30



IPR-PADRSS15




Driver supplied separately, see pg. 220



IPR-PADSSS15



IPR-PADSSS15 / IPR-PADSSS30

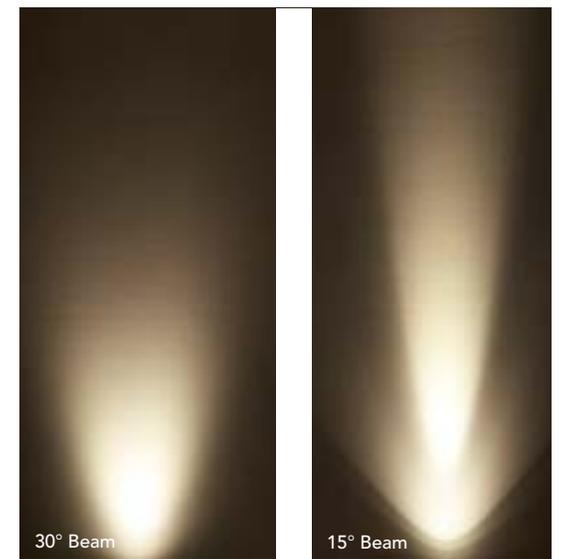


30° Beam

15° Beam

piccadilly IP67



IPR-PICRSS
220 lumens
20° beam

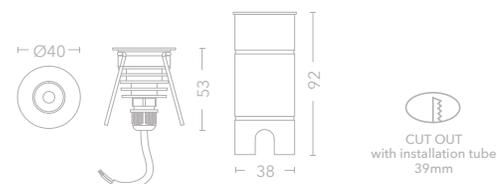

Key Features


- Satin stainless steel Grade 316 cover / Passivated aluminium body
- 3000K
- 3W CREE XPE Power LED
- Driver supplied separately
- Fittings must be wired in series
- Dimmable when used with a dimmable driver
- Includes installation tube

RRP - £47.00

paddington round IP67



IPR-PADRSS15
15° beam
IPR-PADRSS30
30° beam




RRP - £36.00

paddington square IP67



IPR-PADSSS15 ▲
15° beam
IPR-PADSSS30 ▲
30° beam



RRP - £36.00




Key Features

- Satin stainless steel Grade 316 cover / Passivated aluminium body
- 3000K / 90 lumens
- 1W CREE XPE Power LED
- Driver supplied separately
- Fittings must be wired in series
- Dimmable when used with a dimmable driver
- Includes installation tube



glacier IP65

DL-GLAR ▲

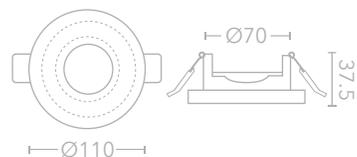

RRP - £24.00





Key Features

Acrylic & Polished chrome
1 x GU10, max. 10W LED only

sophie IP65

New

DL-SOPWB / ■

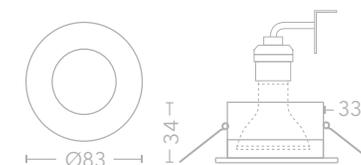

RRP - £14.50



Key Features

Matt White
1 x GU10, max. 10W LED only
Suitable for indoor or outdoor use
Comes with both black and white covers in the box
Distance to front of lamp: 6mm



DL-SLIMFRW 🔥

FIRE RATED



DL-SLIMPW



DL-SLIMIPB


DL-SLIMPW

slim trim
IP65 FR 🔥

FIRE RATED

DL-SLIMPFRW □

CUT OUT 72mm
MIN DEPTH 120mm



RRP - £21.00

DL-SLIMPFRW 🔥💧

- CLASS 1
- DIMMABLE
- IP 65

Key Features


- Matt white
- Steel
- 1 x GU10, max 10W LED only
- Anti-glare
- GU10 lampholder
- Tested in 30, 60 and 90 minute ceilings
- Distance to front of lamp: 26mm

slim trim
IP65

DL-SLIMIPB ■

DL-SLIMPW □

CUT OUT 70mm
MIN DEPTH 135mm



RRP - £15.00

- CLASS 2
- DIMMABLE
- IP 65

Key Features


- Matt black / Matt white
- Aluminium
- 1 x GU10, Max. 10W LED only
- Lamp change from the front, mounting sleeve remains in the ceiling
- Distance to front of lamp: 27mm



BA-M-ACQUA

acqua

BA-M-ACQUA
19W SMD LED
1330 lumens



RRP - £229.20



Key Features

- Frosted / Mirrored glass
- 3000K
- Removable pull cord
- Demister pad heats the centre of the mirror when the light source is on



All bathroom lighting installations must comply to the guidelines set out in Amendment 1 of the 17th edition of the IEE Wiring Regulations (BS7671). The bathroom is divided into zones, with prescribed minimum IP ratings for the light fittings in each zone.

IP rating = Ingress Protection rating.

zone 0

The area inside the bath or shower tray. Fittings must be rated at IPX7 or higher (protected against immersion in water).

zone 1

The area above the bath or shower up to a height of 2.25 metres. Fittings must be rated at IPX5 or higher (protected from jets of water).

zone 2

Covers an area 0.6 metres wide immediately next to, and all around Zone 1. The 60cm area around washbasins should also be treated as zone 2. The minimum rating is IPX4. If there is a likelihood of water jets being used for cleaning purposes in Zone 2, a minimum of IPX5 is required.

outside zone

Covers any area outside Zones 0, 1 and 2. There is no IP requirement in this zone. Bathrooms are allowed to contain a socket outlet, this must be located 3 metres outside Zone 1. Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA RCD protection.

guide to constant current LEDs

Constant current LED items can be identified because the operating power is quoted in milliamps (mA). Project Collection constant current items are either 350mA or 700mA.

Do I need a separate driver?

Yes, choose a 350mA or 700mA driver to suit the number of fittings you want to run, and whether you want to dim the item. Fittings must be wired in series.

Is this dimmable?

Yes, if used with a dimmable 350mA driver and a compatible dimmer.


How do I work out which driver I need?

Identify the current, 350mA or 700mA.
Note the wattage of each item, e.g 1W, 3W

item wattage x no. of items = total wattage
select your driver to suit your requirements

How do I wire this?

In series. See the drivers listed below, the product fitting instructions or the drawing below



* NOTE: All these drivers must be wired in series

The driver doesn't fit through the hole / where do I put the driver?

Drivers should be sited somewhere you can access them for maintenance. This can be up to 60m away from the furthest fitting.

The driver will often be larger than the hole cut out for the item. Again, locate it in another place, where you can access it in the future if required

troubleshooting

The first fitting lights up, the others don't come on

You have wired this in parallel (not in series). You will need to buy replacements for all but the first one.
These are not repairable.

All the fittings have failed

This is due to driver failure. Check that you have wired the circuit correctly, or the driver may fail again.

My fittings come on for a while, then they go off, and turn back on by themselves later

Your driver is overheating. Improve the air flow around it.

My fittings are all flashing

This is a driver issue. First check your driver is not overrun or under-run (i.e. within the minimum and maximum wattages). Otherwise it is a faulty driver.

The first fitting in the circuit stays on after the circuit is turned off

You have residual current in the circuit, or current leakage. Try changing the switch. If these are on a circuit with an intermediate switch it is almost impossible to prevent a small amount of current leakage.
troubleshooting

accessories



MOD1WIP	MOD1WIP230V	MOD1W
1w IP65 350mA LED module	1w IP65 230V LED module	1w 350mA LED module
1W CREE XPE 350mA Beam angle: 30° 95 lumens	1W CREE XPE 350mA Beam angle: 30° 95 lumens	1W CREE XPE 350mA Beam angle: 30° 95 lumens
MOD1WIP 3000K ● MOD1WIP-2700 2700K ●	MOD1WIP230 3000K ● MOD1WIP230V-2700 2700K ●	MOD1W 3000K ● MOD1W-2700 2700K ●

constant current drivers

Item no.	Current	Min. load	Max. load	TRIAC dimmable	IP Rating	Power factor	Dimensions L x W x H (mm)	Tails / Screw terminals
DR350-3	350mA	1W	3W	No	IP65	0.9	38 x 27 x 21	Tails
DR350-3TD	350mA	2W	3W	Yes	IP65	0.9	38 x 27 x 21	Tails
DR350-7	350mA	1W	7W	No	IP65	0.4	60 x 35 x 23	Tails
DR350-9TD	350mA	2W	9W	Yes	IP20	0.9	110 x 45 x 28	Screw terminals
DR350-18TD	350mA	10W	18W	Yes	IP20	0.9	165 x 52 x 25	Screw terminals
DR700-9	700mA	3W	9W	No	IP65	0.5	60 x 35 x 23	Tails
DR700-18TD	700mA	6W	18W	Yes	IP20	0.9	110 x 45 x 28	Screw terminals
DR700-36TD	700mA	20W	36W	Yes	IP20	0.9	165 x 52 x 25	Screw terminals

product name index

andaman IP44	36	honos	40-41	pendant adapter	89	track kit	90
andromeda ceiling	39	hood 230V	169	peri IP44	33, 204	trafalgar	189, 201
andromeda track	84	hoxtan IP65	80, 208	perla	114	trocadero	71
apollo	43	ice	118	piccadilly	172, 210	vavin	128
ara	20	jupiter	99	pimlico (2)	134-135	verve IP44	30, 205
artemis	43	kensington	159	pimlico (2)		victoria	138
avron	148	kobe	190	reader	136-137	victoria LED	120-121
banda IP44	37,203	kyoto	191	plot	171	victoria reader	139
beaumont	176	lanesborough	183	polo	49	vistina long	17
berkeley	185	large rectangle	164	pyrenees IP65	78, 207	vistina round	15
blackfriars	112	laser track	87	pyrenees plaster	73	vulcan	29
blanche GU10	76	laser pendant	13	ripple	32	wall washers	52-53
blanche LED	75	laser reader	115	rome	70	yokohama	195
boulogne LED	75	laser spot	92	sablons	67		
cadet	149	LED strip	102-104	sanderson	177		
cambronne	150	LED strip drivers	109	sapporo	196-197		
chiba duo	192	LED strip profile	107	saturn	34		
clip	28	libra track	86	savoy	182		
compass 2	25	libra 2	155	savoy plus	184		
concorde	144	lino 2	18	selene IP44	93, 200		
cone	163	london bridge	131	shades	162-164		
connaught	180	lyra	42	shoreditch	126		
dalston	117	marlow	116	simplon IP65	77, 206		
diana	81, 209	marylebone	119	simplon plaster	73		
drum	163	mayfair adjustable	187	slim trim	58-61		
E27 3 light	165	mini	51	slim trimless	64-65		
eternity 55	27	mini projector	123	sloane	124-125		
eternity 78	26	mirabeau	147	small rectangle	164		
europe round	145	monceau	147	sophie IP65	63,213		
euston 230V	169	moon	95-97	southwark	127		
farringdon	174-175	moon recessed	47	strand adjustable	187		
fenchurch	140	odeon	151	suzuka slot	197		
glacier	62, 212	olympia	156-157	swivel	39		
grid	54-57	open square	164	taurus track	85		
grosvenor	178	opera	151	tokyo	193		
grosvenor II	179	orbit 120cm	23	track	90		
halkin	133	orcus	35	track accessories	91		
holborn anti glare	81,209	orion track	86	track adapter	89		
holborn IP65	80,208	paddington	173, 211	track heads	84-87		

product code index

AM-VUL	29	FS-OLY	157	OD-SAV-G	182	PL-ROM	70	TR-1	90
BA-M-ACQUA	216	IPR-EUSSS	169	OD-SAVP-G	184	PL-SAB	67	TR-2	90
CE-AND	39	IPR-HOLSS	80, 208	OD-STR-G	187	PL-SIMPL	72	TR-AND	84
CE-HONR	41	IPR-HOLSSAG	81, 209	OD-SUZ-GW	197	PL-SLIMFRW	65	TR-CC	91
CE-HONSQ2	40	IPR-HOODSS	169	OD-TOKYO	193	PL-SLIMIPW	64	TR-EC	91
CE-HONSQ	41	IPR-HOXCP	80, 208	OD-TRA	189, 201	PL-SLIMW	64	TR-FC	91
CE-LINO2	18	IPR-PAD	173, 211	OD-YOK	195	PL-TROCA	71	TR-LAS	87
CE-ORC40	35	IPR-PICRSS	172, 210	PA-VER	30	SH-CO	164	TR-LC	91
CE-PERI30	33	IPR-PLOT	171	PE-APO	43	SH-DIF40	163	TR-LE	91
CE-SWI	39	IPR-WR	78, 207	PE-ARA	20	SH-DR15	163	TR-LIB	86
CE-VER	30, 205	IPR-WSL	77, 206	PE-ART	43	SH-DR30	163	TR-MJ	91
DL-DIA-W	81, 209	LED-PROJ1W	123	PE-CLIP	28	SH-DR40	163	TR-ORI	86
DL-GLAR	62,212	LST-14	104	PE-COM2	25	SH-P3-SN	165	TR-PEN	89
DL-GRID1	54	LST-4	102	PE-ETE55	27	SH-RL	164	TR-SUS	91
DL-GRID1FR	56	LST-5	102	PE-ETE78	26	SH-RS	164	TR-T1	90
DL-GRID2	55	LST-CON1	105	PE-LAS6	13	SH-SF3-SN	165	TR-T2	90
DL-GRID2FR	56	LST-CON2	105	PE-LYRAB	42	SH-SQO	164	TR-TAU	85
DL-GRID3	55	LST-CON3	103	PE-ORB120	23	SH-VICLED	120-121	TR-TC	91
DL-MINW	51	LST-CON4	103	PE-VIST	17	SH-WBFEN-SN	140	TR-XC	91
DL-POLW	49	LST-DR	108-109	PE-VISTR	15	SH-WBPIM	134-137	WL-BLF	112
DL-SLIM	59	LST-PRO	106-107	PL-AVRON	148	SH-WBVIC	138-139	WL-DAL	117
DL-SLIMFRW	58	OD-BEA-G	176	PL-BLA	75	SP-JUP	99	WL-HALK	133
DL-SLIMIP	61, 215	OD-BER1-G	185	PL-BLAGU10	76	SP-LAS1S	92	WL-ICE	118
DL-SLIMIPFR	60, 214	OD-CHIBA	192	PL-BOU	74	SP-MOO1	95	WL-LASR	115
DL-SLIMSQ	59	OD-CON	180-181	PL-CADET	149	SP-MOO1R	95	WL-LB	131
DL-SOPWB	63, 213	OD-FARP	175	PL-CAMBR	150	SP-MOO1S	95	WL-MAR	119
DL-WASH	53	OD-FARR	174	PL-CONC	144	SP-MOO2	97	WL-MLW	116
DL-WWW	52	OD-FPOLE	174	PL-EUROR	145	SP-MOO3	96	WL-PRL	114
FL-ADM	36, 202	OD-GRO	178-179	PL-GRID1FR	57	SP-MOO3L	96	WL-SHO20	127
FL-BAN	37, 203	OD-KOB	190	PL-MINW	51	SP-MOO4	97	WL-SLO	124-125
FL-ETE55-WS	27	OD-KYO	191	PL-MIRAB	147	SP-MOOR	47	WL-SOU24	126
FL-LYRAB	42	OD-LAN-G	183	PL-MONCE	147	SP-SEL3	93, 200	WL-VAV	128
FL-RPL40	32	OD-MAY-G	187	PL-ODEON	151	TA-KEN	159		
FL-SAT	34	OD-SAN80-G	177	PL-OPERA	151	TA-LIB2	155		
FS-KEN	159	OD-SAPL-GW	197	PL-POLW	49	TA-OLY	157		
FS-LIB2	155	OD-SAPS-GW	196	PL-PYREN	72	TA-OLY-USB	156		

Additional information


Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without any liability on the part of the Company. Goods supplied may vary in detail from the illustrations, drawings, measurements and descriptions set out in the Company's sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is, subject to these Conditions, that as understood by general usage in the trade. For full terms and conditions of sale consult your distributor.

guide to symbols


 Products with this icon are limited stock items.

 CLASS 1 Class I fittings must have their chassis connected to an electrical earth (ground).	 CLASS 2 Class II or double insulated electrical fittings does not require a safety connection to electrical earth (ground).	 CLASS 3 Class III fittings are designed to be supplied from a separated / safety extra-low voltage (SELV) power source.	 IP 44 (4) Objects greater than 1 mm, e.g. tools, wires / small wires (4) Protected against water sprayed from all directions - limited ingress permitted.	 IP 54 (5) Protected against dust - limited ingress (no harmful deposits) (4) Protected against water sprayed from all directions - limited ingress permitted.	 IP 65 (6) Totally protected against dust (Dust-tight) (5) Protected against low pressure jets of water from all directions - limited ingress permitted.	 IP 67 (6) Totally protected against dust (Dust-tight) (7) Protection against the effects of immersion between 15cm - 1 metre	 SWITCH The product has an electrical ON/OFF switch incorporating a spring-loaded rocker.
 DIMMABLE The fitting can be used with a compatible dimming light switch.	 GLASS The fitting contains fragile glass parts.	 CUT OUT 75mm The fitting requires a ceiling or wall cut out.	 DRIVE OVER The outdoor, inset floor mounted fitting can be driven over by a vehicle, up to 2000kg weight limit.	 FIRE RATED Fire rated downlights restore the fire integrity of a ceiling with recessed ceiling lights installed.	 320kg WALKOVER The outdoor, inset floor mounted fitting can be walked over by a flat foot, up to 320kg weight limit.	 350mA A unit of electric current (mA) equal to one thousandth of an Amp.	 24 VOLTS The SI unit of electromotive force, the Volt (V) is a standard for extra low voltage power systems.

shade colours

C Coconut colour cotton material lamp shade.	M Mushroom colour cotton material lamp shade.	G Grey seal colour cotton material lamp shade.
 Coconut OFF	 Coconut ON	 Mushroom OFF
 Mushroom ON	 Grey seal OFF	 Grey seal ON

fitting finishes

 AB Antique brass finish for fixtures & fittings.	 SN Satin nickel finish for fixtures & fittings.	 CP Polished chrome finish for fixtures & fittings.	 B Black finish for fixtures & fittings.	 W White finish for fixtures & fittings.	 GR Graphite grey finish for fixtures & fittings.
 Antique brass	 Satin nickel	 Polished chrome	 Black	 White	 Graphite grey

gids voor symbolen

 KLASSE 1 Klasse 1 armaturen moeten in bezit zijn van een aardeverbinding.	 KLASSE 2 Klasse 2 armaturen hoeven geen aardeverbinding te bezitten.	 KLASSE 3 Klasse 3 armaturen zijn ontworpen voor een externe laagspanningsvoeding.	 IP 44 IP44 (4) Objecten groter dan 1mm zoals bv kabels / armaturen zijn (4) beschermd tegen water nevel vanuit elke hoek. Beperkt indringen toegestaan.	 IP 54 IP55 (5) Beschermd tegen stof - beperkt indringen toegestaan en niet schadelijk. (5) Beschermd tegen water nevel vanuit elke hoek. Beperkt indringen toegestaan.	 IP 65 IP65 (6) Compleet beschermd tegen stof (5) Beschermd tegen lichte waterstralen, vanuit elke hoek. Beperkt indringen toegestaan.	 IP 67 IP67 (6) Compleet beschermd tegen stof (7) Beschermd tegen het effect van onderdompeling 15cm tot 1m.	 SCHAKELAAR Dit product heeft een elektrische aan/uit schakelaar, in combinatie met een veerbelaste tuimelaar.
 DIMBAAR Dit armatuur is geschikt om te dimmen, in combinatie met dimbare lichtbron.	 GLAS Dit armatuur bevat kwetsbare glazen onderdelen.	 OPENING 75mm Voor dit armatuur is een opening in het plafond vereist.	 OVERRIJBAAR Geschikt voor plaatsing in de vloer, met een drukbelasting tot 2000 kilo.	 BRÄNDWER-END Dit armatuur beschikt over een brandwerende functie.	 320kg OVERLOOP-BAAR Geschikt voor plaatsing in de vloer, met een drukbelasting tot 320 kilo.	 350mA Een eenheid van elektrische stroom gelijk aan een duizendste van een Amp.	 24 VOLTS De SI-eenheid van elektromotorische kracht, is volt. Dit is standaard voor extra laagspanning-systemen.

lampenkappen kleuren

C Coconut kleur katoen materiaal lampenkap.	M Mushroom kleur katoen materiaal lampenkap.	G Grey seal kleur katoen materiaal lampenkap.
 Coconut UIT	 Coconut ANN	 Mushroom UIT
 Mushroom ANN	 Grey seal UIT	 Grey seal ANN

armatuur kleuren

 AB Antiek messing afwerking voor armaturen en fittingen.	 SN Satijn messing afwerking voor armaturen en fittingen.	 CP Geopolijst messing afwerking voor armaturen en fittingen.	 B Zwart messing afwerking voor armaturen en fittingen.	 W Wit messing afwerking voor armaturen en fittingen.	 GR Grafiet messing afwerking voor armaturen en fittingen.
 Antique brass	 Satin nickel	 Polished chrome	 Black	 White	 Graphite grey

guide des symboles

 CLASSE 1 Dispositifs de Classe I : Le châssis doit être connecté à une prise de terre.	 CLASSE 2 Classe II ou double isolation du câblage électrique connexion de sécurité à une prise de terre électrique non obligatoire.	 CLASSE 3 Les dispositifs de classe III sont conçus pour être alimentés par une source d'alimentation séparée en basse tension (SELV).	 IP 44 (4) Protégé contre objets de plus de 1 mm, exemple : outils, fils électriques (4) Protégé contre l'eau pulvérisée dans toutes les directions - pénétration limitée.	 IP 54 (5) Protégé contre la poussière - pénétration limitée (pas de dépôts) (4) Protégé contre l'eau pulvérisée dans toutes les directions - pénétration limitée.	 IP 65 (6) Totalemnt protégé contre la poussière (étanche à la poussière) (5) Protégé contre les jets basse pression dans toutes les directions - pénétration limitée.	 IP 67 (6) Totalemnt protégé contre la poussière (étanche à la poussière) (7) Protection contre les effets de l'immersion entre 15cm - 1 mètre.	 INTER Le produit possède un interrupteur électrique interrupteur ON/OFF incorporant une bascule à ressort.
 DIMMABLE Le dispositif peut être utilisé avec un appareil variateur de lumière compatible.	 VERRES The fitting contains fragile glass parts.	 DÉCOUPE 75mm L'installation électrique de l'appareil nécessitent une découpe.	 DRIVE OVER L'encastré de sol peut être écrasé par un véhicule, jusqu'à une limite de poids de 2000 kg.	 FIRE RATED Ignifuge - Protection au feu - prévient le risque d'incendie dans un plafond.	 320kg WALKOVER L'armature de l'encastrée de sol résiste jusqu'à un poids de 320 kg.	 350mA Unité de courant électrique (mA) égale à un millième d'ampère.	 24 VOLTS L'unité SI de la force électromoteur, le Volt (V) est un standard pour les puissances basse tension.

couleurs abajour

C Coconut Abat-jour en coton de couleur.	M Mushroom Abat-jour en coton de couleur.	G Grey seal Abat-jour en coton de couleur.
 Coconut OFF	 Coconut ON	 Mushroom OFF
 Mushroom ON	 Grey seal OFF	 Grey seal ON

finitions des luminaires

 AB Finition en laiton antique pour les luminaires et les composants.	 SN Finition en Nickel Satiné pour les luminaires et les composants.	 CP Finition en Chrome Poli pour les luminaires et les composants.	 B Finition en Noir pour les luminaires et les composants.	 W Finition en Blanc pour les luminaires et les composants.	 GR Finition en Gris graphite pour les luminaires et les composants.
 Laiton antique	 Nickel satiné	 Chrome poli	 Noir	 Blanc	 Gris graphite

Benelux Showroom / Office

Hoogjens 1
 4254 XV Sleeuwijk
 Netherlands
 +31 85-303 6527

European Warehouse

Searchlight Electric / Clipper
 Logistics Starachowicka 16
 Number 9
 62-023 Robakowo
 Polen

Germany Office

Mainz: +49 6131 276 3003

France Office

Lyon: +33 4 87 94 03 47

Sweden Office

Stockholm: +46 8 121 607 51

international@searchlightelectric.com





© 2024 All Rights Reserved Searchlight Electric Ltd



project collection

www.projectcollection.co.uk

2024

Searchlight Electric Ltd

UK & Ireland

Sidney House

900 Oldham Road

Manchester

M40 2BS

United Kingdom

+44 (0) 161 203 3456

info@projectcollection.co.uk



5 053423 260600